


Volume 41 Number 11 June 2015

Paddy and Water Environment

Journal of the International Society of
Paddy and Water Environment Engineers



 Springer



Paddy and Water Environment



[Paddy and Water Environment](#) > Editors

Editors

Editor-in-Chief

Toshiaki Iida, Iwate University, Iwate, Japan

Associate Editors-in-Chief

Seong-Joon Kim, Konkuk University, Seoul, Korea

Yu-Pin Lin, National Taiwan University, Taipei, Taiwan, ROC

Editors

M.S.M. Amin, University Putra Malaysia (UPM), Serdang, Selangor Darul Ehsan, Malaysia

Muhammad Ashraf, International Center for Agri. Res. In the Dry Areas (ICARDA), Islamabad, Pakistan

Mohamed Ali El-Desoky, Assuit University, Assuit, Egypt

Young Gu Her, University of Florida, USA

Shao-Yiu Hsu, National Taiwan University, Taipei, Taiwan, ROC

Syewoon Hwang, Gyeongsang National University, Gyeongsang, Korea

Min-Won Jang, Gyeongsang National University, Gyeongnam, Korea

Mohammadreza Khaledian, University of Guilan, Rasht, Iran

Hakkwan Kim, Seoul National University, Seoul, Korea

Masaomi Kimura, Kindai University, Nara, Japan

Naoko Koshiyama, Civil Engineering Research Institute for Cold Region, Hokkaido, Japan

Wen-Chen Liu, National United University, Miaoli, Taiwan, ROC

Mohammed Mainuddin, CSIRO, Canberra, Australia

Keigo Noda, Gifu University, Gifu, Japan

Roohollah Noori, University of Tehran, Tehran, Iran

Naoko Oka, Japan International Research Center for Agricultural Sciences (JIRCAS), Ibaraki, Japan

Luis Santos Pereira, Technical University of Lisbon, Lisbon, Portugal

Budi Indra Setiawan, Bogor Agricultural University, Bogor, Indonesia

Jian-Ping Suen, National Chung Kung University, Taoyuan, Taiwan, ROC

Tawatchai Tingsanchali, Nakhon Pathom Rajabhat University, Nakhon Pathom, Thailand

Takeo Yoshida, Institute for Rural Engineering, NARO, Ibaraki, Japan

Natsuki Yoshikawa, Niigata University, Niigata, Japan

Editorial Advisors

Abdel-Samad M. Ali, Assiut University, Assuit, Egypt

Mohammed Shehata Alkridy, Kafrelsheikh University, Kafrelsheikh, Egypt

Fi-John Chang, National Taiwan University, Taipei, Taiwan, ROC

Ke-Sheng Cheng, National Taiwan University, Taipei, Taiwan, ROC

Kyung Sook Choi, Kyungbook National University, Daegu, Korea

Jin Yong Choi, Seoul National University, Seoul, Korea

Rashed Chowdhury, University Hawaii at Manoa, Honolulu, HI, USA

Aldo Ferrero, University of Turin, Grugliasco, Italy

Charlotte de Fraiture, UNESCO-IHE, Institute for Water Education, Delft, The Netherlands

James E. Hill, University of California, Davis, CA, USA

Koki Homma, Tohoku University, Miyagi, Japan

Jiesheng Huang, Wuhan University, Hubei, P.R. China

Munehide Ishiguro, Hokkaido University, Hokkaido, Japan

Wael Abdel Kawy, Cairo University, Giza, Egypt

Nasir M. Khan, Pakistan Engineering Council (PEC), Islamabad, Pakistan

Song-Bae Kim, Seoul National University, Seoul, Korea

Sucharit Koontanakulvong, Chulalongkorn University, Bangkok, Thailand

Bancha Kwanyuen, Kamphaengsaen Kasetsart University, Nakhon Pathom, Thailand

Suan Pheng Kam, Natural Resources Management, WorldFish Center, Penang, Malaysia

Kimihito Nakamura, Kyoto University, Kyoto, Japan

V.R. Reddy, Crops and Systems, USDA-ARS, Beltsville, MD, USA

Klaus Röttcher, Westfalia University of Applied Sciences, Suderburg, Germany

Satyanto Krido Saptomo, Bogor Agricultural University, Bogor, Indonesia

Abdul Rashid Bin Mohamed Shariff, University Putra Malaysia, Selangor Darul Ehsan, Malaysia

Ming-Daw Su, National Taiwan University, Taipei, Taiwan, ROC

Norman Uphoff, Cornell University, Ithaca, NY, USA

Varawoot Vudhivanich, Kasetsart University, Nakhon Pathom, Thailand

Ray-Shyan Wu, National Central University, Taipei, Taiwan, ROC

Gwo-Hsing Yu, Tamkang University, Tamsui, Taiwan, ROC

Chief Managing Editor

Chihhao Fan, National Taiwan University, Taipei, Taiwan, ROC

Managing Editors

Eunmi Hong, Kangwon National University, Chuncheon, Korea

Taeil Jang, Chonbuk National University, Jeonju, Korea

Tasuku Kato, Tokyo University of Agriculture and Technology, Tokyo, Japan

Kuo-Wei Liao, National Taiwan University, Taipei, Taiwan, ROC

Shu-Yuan Pan, National Taiwan University, Taipei, Taiwan, ROC

Katsuyuki Shimizu, Tottori University, Tottori, Japan

Soji Shindo, Japan International Research Center for Agricultural Sciences (JIRCAS), Ibaraki, Japan

For authors

[Submission guidelines](#)

[Manuscript editing services](#)

[Ethics & disclosures](#)

[Open Access fees and funding](#)

[Contact the journal](#)

Submit manuscript

Working on a manuscript?



Avoid the most common mistakes and prepare your manuscript for journal editors.

[Learn more](#) →

Explore

[Online first articles](#)

[Volumes and issues](#)

Sign up for alerts



Publish with us

[Authors & Editors](#)

[Journal authors](#)

[Publishing ethics](#)

[Open Access & Springer](#)

Discover content

[SpringerLink](#)

[Books A-Z](#)

[Journals A-Z](#)

[Video](#)

Other services

[Instructors](#)

[Librarians \(Springer Nature\)](#)

[Societies and Publishing Partners](#)

[Advertisers](#)

[Shop on Springer.com](#)

About Springer

[About us](#)

[Help & Support](#)

[Contact us](#)

[Press releases](#)

[Impressum](#)

Legal

[General term & conditions](#)

[California Privacy Statement](#)

[Rights & permissions](#)

[Privacy](#)

[How we use cookies](#)

[Manage cookies/Do not sell my data](#)


[Accessibility](#).

Not logged in - 36.73.35.146

Not affiliated

SPRINGER NATURE

© 2023 Springer Nature Switzerland AG. Part of [Springer Nature](#).



Paddy and Water Environment



[Paddy and Water Environment](#) > [Volumes and issues](#) > **Volume 8, issue 2**

Search within journal

Volume 8, issue 2, June 2010

10 articles in this issue

[A stochastic model for behaviour of fish ascending an agricultural drainage system](#)

Koichi Unami, Kei Ishida ... Junichiro Takeuchi


Article | Published: 28 November 2009 | Pages: 105 - 111



[Spatial variability of soil saturated hydraulic conductivity in paddy field in accordance to subsurface percolation](#)

K. Wijaya, T. Nishimura ... S. K. Saptomo


Article | Published: 01 December 2009 | Pages: 113 - 120



[Dynamics of dissolved ions in the soil of abandoned terraced paddy fields in Sado Island, Japan](#)

Nobuhiro Oyanagi & Makoto Nakata

Article | Published: 01 December 2009 | Pages: 121 - 129



[Evaluation of HEC-HMS and WEPP for simulating watershed runoff using remote sensing and geographical information system](#)

Arbind K. Verma, Madan K. Jha & Rajesh K. Mahana


Article | Published: 03 December 2009 | Pages: 131 - 144



[A physically based FVM watershed model fully coupling surface and subsurface water flows](#)

Junichiro Takeuchi, Toshihiko Kawachi ... Shigeya Maeda

Article | Published: 22 December 2009 | Pages: 145 - 156



[Effects of partial rootzone drying on yield, yield components, and irrigation water use efficiency of canola \(*Brassica napus* L.\)](#)

S. F. Mousavi, S. Soltani-Gerdefaramarzi & B. Mostafazadeh-Fard


Article | Published: 05 January 2010 | Pages: 157 - 163



[A mixture neural methodology for computing rice consumptive water requirements in Fada N'Gourma Region, Eastern Burkina Faso](#)

Seydou Traore, Yu-Min Wang ... Jan Mou Leu


Article | Published: 02 February 2010 | Pages: 165 - 173



[A refined hydro-environmental watershed model with field-plot-scale resolution](#)

Junichiro Takeuchi, Chie Imagawa ... Tomoki Izumi


Article | Published: 20 January 2010 | Pages: 175 - 187



[Performance of polymer-coated urea in transplanted rice: effect of mixing ratio and water input on nitrogen use efficiency](#)

Mukund D. Patil, Bhabani S. Das ... Amir Polak


Article | Published: 28 January 2010 | Pages: 189 - 198



[Comparative analysis of temporal changes of multifunctionality benefit of two major rice paddy plains in Taiwan](#)

Chen-Wuing Liu, Shih-Wei Zhang ... Wei-Taw Lin

Article | Published: 13 February 2010 | Pages: 199 - 205



For authors

[Submission guidelines](#)

[Manuscript editing services](#)

[Ethics & disclosures](#)

[Open Access fees and funding](#)

[Contact the journal](#)

Submit manuscript



Working on a manuscript?

Avoid the most common mistakes and prepare your manuscript for journal editors.

[Learn more](#) →

Explore

[Online first articles](#)

[Volumes and issues](#)

[Sign up for alerts](#)

Not logged in - 36.73.35.146

Not affiliated

SPRINGER NATURE

© 2023 Springer Nature Switzerland AG. Part of [Springer Nature](#).



Paddy and Water Environment

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
Germany  Universities and research institutions in Germany  Media Ranking in Germany	Agricultural and Biological Sciences Agronomy and Crop Science Environmental Science Environmental Engineering Water Science and Technology	Springer Verlag	38
PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Journals	16112490, 16112504	2005-2021	Homepage How to publish in this journal masumoto@akita-pu.ac.jp

Ad closed by Google

SCOPE

The aim of Paddy and Water Environment is to advance the science and technology of water and environment related disciplines in paddy-farming. The scope includes the paddy-farming related scientific and technological aspects in agricultural engineering such as irrigation and drainage, soil and water conservation, land and water resources management, irrigation facilities and disaster management, paddy multi-functionality, agricultural policy, regional planning, bioenvironmental systems, and ecological conservation and restoration in paddy farming regions.




 Join the conversation about this journal



Ad closed by Google

Ad closed by Google

FIND SIMILAR JOURNALS ?

1 Agricultural Research in the Arid Areas CHN 50% similarity	2 Archives of Agronomy and Soil Science GBR 44% similarity	3 Journal of Arid Land CHN 42% similarity	4 Agricultural CHE 4 s
--	--	---	--

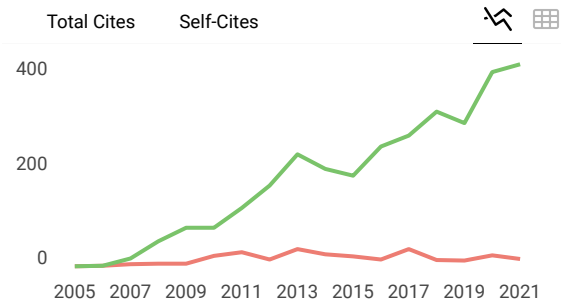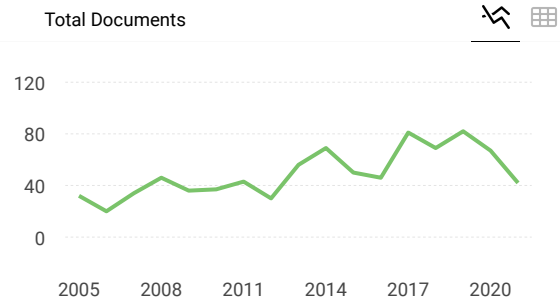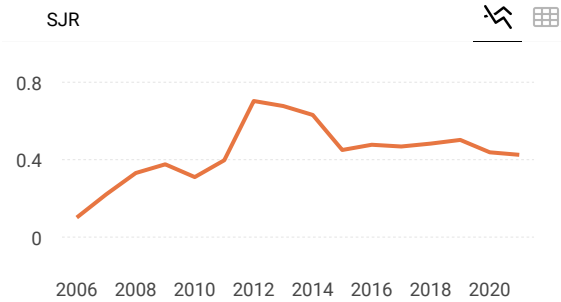

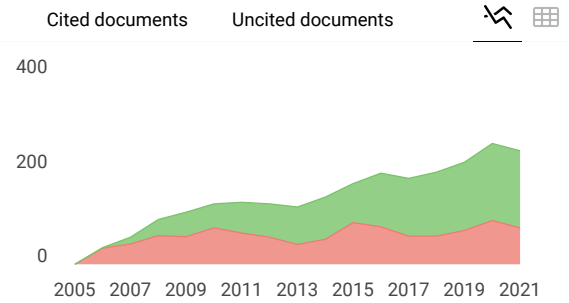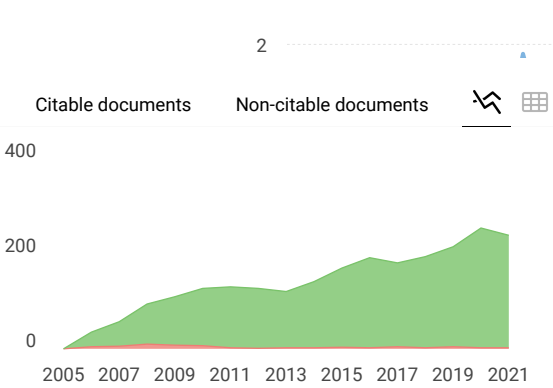

Paddy and Water Environment

Q2 Agronomy and Crop Science
best quartile

SJR 2021
0.43

powered by scimagojr.com


← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" data-bbox="634 334 779 348">
```



Explore, visually communicate and make sense of data with our [new data visualization tool](#).



Submit paper for publication

Metrics based on Scopus® data as of April 2022

Leave a comment

Name

Email

(will not be published)

☐ I'm not a robot

reCAPTCHA
[Privacy](#) - [Terms](#)

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1, 1, 106)

[Cookie settings](#)

[Cookie policy](#)

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/226883687>

Spatial variability of soil saturated hydraulic conductivity in paddy field in accordance to subsurface percolation

Article in *Paddy and Water Environment* · June 2010

DOI: 10.1007/s10333-009-0190-x

CITATIONS

9

READS

297

4 authors:



Krissandi Wijaya

Universitas Jenderal Soedirman

23 PUBLICATIONS 57 CITATIONS

[SEE PROFILE](#)



Taku Nishimura

The University of Tokyo

96 PUBLICATIONS 730 CITATIONS

[SEE PROFILE](#)



Budi Indra Setiawan

Bogor Agricultural University

230 PUBLICATIONS 984 CITATIONS

[SEE PROFILE](#)



Satyanto K. Saptomo

Bogor Agricultural University (IPB University)

113 PUBLICATIONS 488 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



WATER MANAGEMENT [View project](#)



TROPICAL PEATLANDS [View project](#)

Spatial variability of soil saturated hydraulic conductivity in paddy field in accordance to subsurface percolation

K. Wijaya · T. Nishimura · B. I. Setiawan ·
S. K. Saptomo

Received: 23 June 2009 / Accepted: 15 November 2009
© Springer-Verlag 2009

Abstract Insufficient puddling with inappropriate implements or imprecise time/intensity may alter saturated water flow in paddy soil spatially or temporary due to change in aggregate size distribution, dry bulk density, saturated hydraulic conductivity, and percolation rate of the soil. In this study, spatial variability of saturated hydraulic conductivity (K_s), a key parameter of the saturated water flow, in Fuchu Honmachi paddy plot (100 m × 28 m) was characterized based on dielectric or ADR dry bulk density (ρ_{b-ADR}) with help of non-similar media concept (NSMC) and geostatistics model to meet its correlation to subsurface percolation. A 100 cc core and an ADR data were sampled from each sub-plot (7 m × 7.5 m), and then were used for measuring and

predicting ρ_b and K_s . The predicted data agreed with the measured ones, in which they fitted well the $x = y$ line with RMSE of $0.029 \text{ cm}^3 \text{ cm}^{-3}$ ($R^2 = 0.68$), 0.027 g cm^{-3} ($R^2 = 0.71$) (ρ_b), and 0.098 cm d^{-1} ($R^2 = 0.45$) for θ , ρ_b , and K_s , respectively. The predicted ρ_b and K_s had similar trend in spatial variability to the measured ones particularly within the distance of 46.3–51.9 m and 26.2–27.9 m, respectively. The spatial variability of the predicted K_s coincided to that of the subsurface percolation rate, in which they had similar distance of dependence. The results indicated that the presenting method can be reasonably accepted.

Keywords Spatial variability · Saturated hydraulic conductivity · Paddy field · Dielectric dry bulk density · Subsurface percolation

K. Wijaya (✉)
Agricultural Engineering Study Program, Jenderal Soedirman
University, Jl. dr. Soeparno Kampus Karangwangkal Kotak
Pos 125, Purwokerto 53123, Central Java, Indonesia
e-mail: kwijaya77@yahoo.com
URL: <http://faperta.unsoed.ac.id/>

T. Nishimura
Graduate School of Agriculture and Life Sciences,
The University of Tokyo, 1-1-1, Yayoi, Bunkyo-ku,
Tokyo 113-8657, Japan
e-mail: takun@soil.en.a.u-tokyo.ac.jp
URL: <http://soil.en.a.u-tokyo.ac.jp/>

B. I. Setiawan · S. K. Saptomo
Department of Civil and Environmental Engineering,
Bogor Agricultural University, Kampus IPB Darmaga,
Bogor 16680, Indonesia
e-mail: budindra@ipb.ac.id
URL: <http://web.ipb.ac.id/~sil-ipb/>

S. K. Saptomo
e-mail: ddody@yahoo.com
URL: <http://web.ipb.ac.id/~sil-ipb/>

Introduction

Saturated water flow is an important factor in understanding the dynamic process of water and solute movement in soil. Although in most cases of upland field, saturated water flow is often used to designate an appropriate internal drain-ability for better crop growth (Arya et al. 1998). However, in paddy field it is considered to be undesirable since it may affect water balance instability, fertilizer inefficiency, and results in groundwater contamination by pesticide through subsurface percolation (Malone et al. 2003; Vu et al. 2003). Therefore, characterizing the saturated water flow and its distribution pattern in the paddy field is vital and worthy to be conducted to support better cultivation as well as to conserve aquatic environment.

Saturated hydraulic conductivity is a representative key parameter of the saturated water flow in soil. A number of

direct methods have been applied for determining saturated hydraulic conductivity (Reynolds and Elrick 1991; Clothier and Smethem 1990; Wooding 1968). However, most of the methods are difficult to use and often time consuming (Libardi et al. 1980). This triggered many researchers to develop prediction model for determining saturated hydraulic conductivity from some basic soil physical properties (Julia et al. 2004; Regalado and Carpena 2004; Zhuang et al. 2001; Miyazaki 1996; Ahuja et al. 1989).

Wijaya and Kuncoro (2008), Wijaya et al. (2004, 2003), and hereafter Setiawan et al. (2004) developed a simple method for predicting volumetric water content and dry bulk density based on dielectric constant data produced by amplitude domain reflectrometer (ADR). By using five types of upland field soils, namely TUAT's Andisol, Fukaya's Alluvial, Bogor's Latosol, Cidanau-Banten's Brown Alluvial, and Pratin-Purbalingga's soil, it was found that the predicted values of such physical properties agreed well with the measured ones. Accordingly, employing the predicted data to NSMC model of Miyazaki (1996) to determine saturated hydraulic conductivity as well as its spatial variability in the fields was acceptable (Wijaya and Kuncoro 2008; Wijaya et al. 2005; Nishimura et al. 2007). However, in case of wetland field soils such as paddy field, the method has not been excessively applied yet.

This study was aimed to predict and to characterize spatial variability of saturated hydraulic conductivity in a paddy field based on dielectric (ADR) properties of dry bulk density as well as volumetric water content, and then to correlate the results to the field-distributed subsurface percolation.

Methodology

Experimental plot and soil properties

The experimental plot of 100 m × 28 m in large was prepared at Fuchu Honmachi paddy field (35°41' N, 139°29' E, 59 MSL) of Tokyo University of Agriculture and Technology (TUAT), Japan in the end of summer 2003. A number of 39 undisturbed soil and ADR samples were collected from every 7 m × 7.5 m subplots (Fig. 1) at the depth of about 15 cm by using 100 cc core and ADR probe, respectively. Additional disturbed soil samples were randomly taken from the plot for determining some soil properties as described in Table 1, and for ADR calibration purpose.

Calibration of ADR probe

The disturbed soil samples were packed into acrylic cylinder of 11 cm in inner diameter and 8 cm in height (Fig. 2). After the sample was weighed by using electric

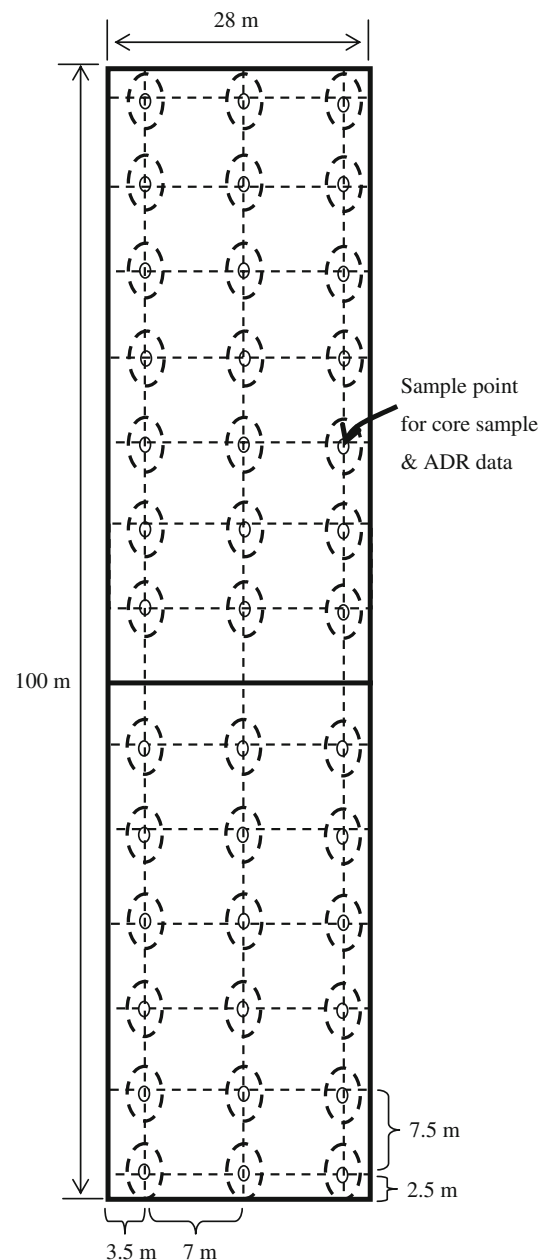


Fig. 1 Experimental plot of Fuchu Honmachi paddy field

balance, the ADR probe was inserted vertically into the sample, and its output voltage was then recorded by using a digital voltmeter. Volumetric water content and the output voltage were plotted and fitted by using simple least-square method to obtain the calibration equation.


Procedure to predict saturated hydraulic conductivity

The obtained calibration equation was used to predict soil volumetric water content (θ), and the predicted data was then substituted in Eq. 1 (Wijaya et al., 2003) to calculate the dry bulk density (ρ_b) as follows:

Table 1 Physical properties of TUAT's Fuchu Honmachi paddy field soil

Parameters (unit)	Value
Texture (g kg ⁻¹), sand:silt:clay	0.38:0.32:30 (light clay, LiC) ^a
Organic carbon content (g kg ⁻¹)	39.6
Particle density (g cm ⁻³)	2.50
Dry bulk density (g cm ⁻³)	0.77–1.01
Total density (g cm ⁻³)	1.19–1.48
Cation exchange capacity, CEC (cmol kg ⁻¹)	22.5

^a Textural class was defined based on the Japanese System of Textural Classification (Kawaguchi and Kyuma 1974)

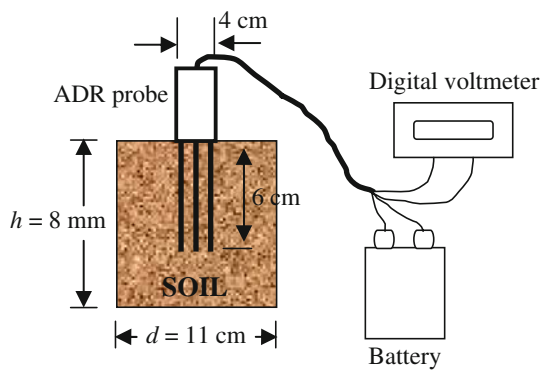**Fig. 2** Calibration of ADR probe

$$\rho_{b-ADR} = \rho_t - (\theta_{ADR} \cdot \rho_w) \quad (1)$$

where θ_{ADR} is the predicted volumetric water content by ADR (g cm⁻³), ρ_t is the total density (g cm⁻³), and ρ_w is the density of water (1 g cm⁻³).

Saturated hydraulic conductivity (K_s) was predicted from the ADR dry bulk density (ρ_{b-ADR}) by using the non-similar media concept (NSMC) model of Miyazaki (1996) (Eq. 2) with certain parameters, i.e., K_{so} , τ , ρ_s , and ρ_{bo} , fitted prior to the prediction.


$$K_s = K_{so} \left[\frac{\left(\frac{\tau \rho_s}{\rho_{b-ADR}} \right)^{1/3} - 1}{\left(\frac{\tau \rho_s}{\rho_{bo}} \right)^{1/3} - 1} \right]^2 \quad (2)$$

where K_{so} is the measured saturated hydraulic conductivity of reference sample with a dry bulk density, ρ_{bo} , τ is the shape factor (it is limited by $\rho_b/\rho_s < \tau \leq 1$), and ρ_s is the measured particle density of the reference sample.

For laboratory scale, the volumetric water content and the dry bulk density were measured gravimetrically, while the saturated hydraulic conductivity was determined by falling head method. The data were used to validate the results of the predicted parameters obtained from the field observation.

Distribution of the predicted and the measured parameters, and also the subsurface percolation rate through puddled layer (0–15 cm in depth), monitored by Souphasay et al. (2003) under ponding condition, at 20 and 70 days after puddling were plotted in contour map. Their spatial variability were then analyzed by using semivariogram (Eq. 3), a well-known geostatistic tool (Clark 1979). Finally, those data were compared and corresponded one to another.

$$\gamma(h) = \frac{1}{2N(h)} \sum_{i=1}^{N(h)} [z(x_i) - z(x_i + h)]^2 \quad (3)$$

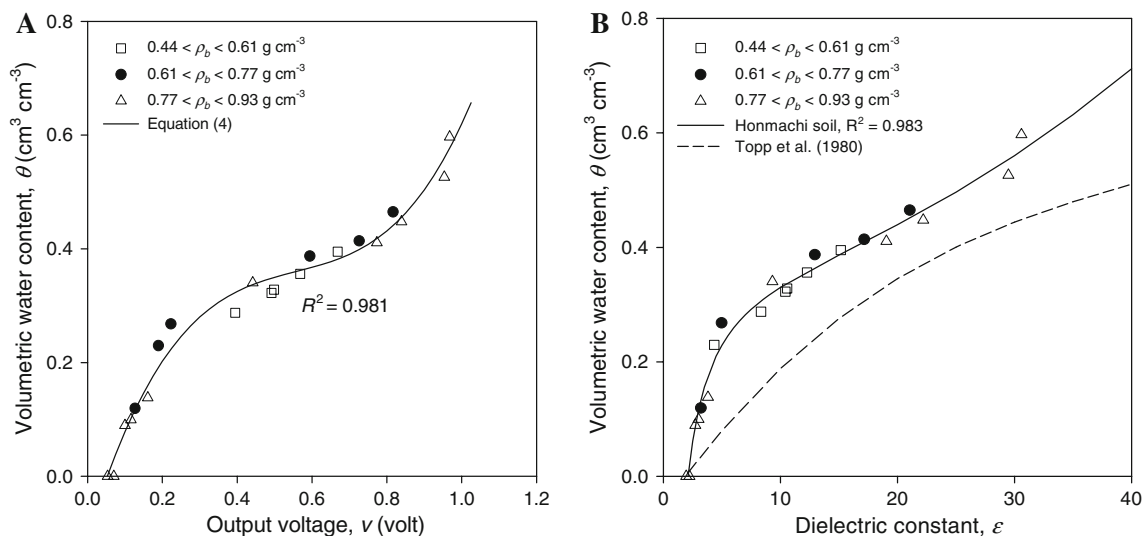**Fig. 3** Relationship between volumetric water content with: ADR output voltage (a) and dielectric constant (b)

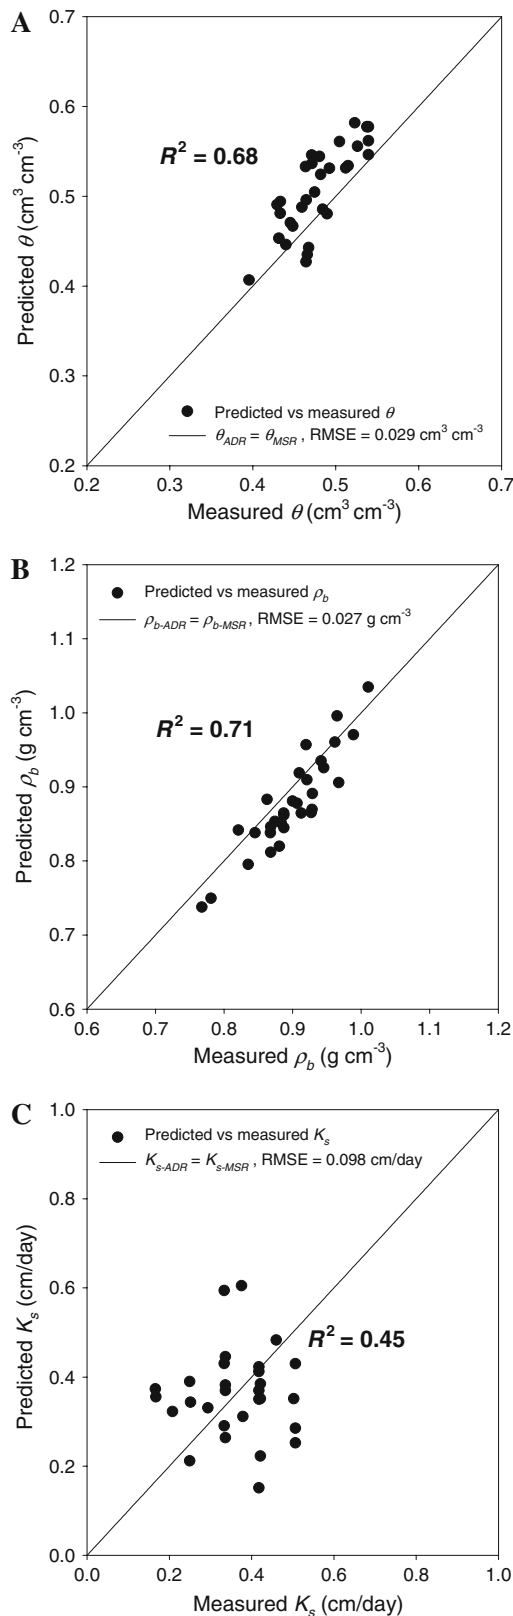


Fig. 4 Comparison between the predicted and the measured parameters: volumetric water content (a), dry bulk density (b), and saturated hydraulic conductivity (c)

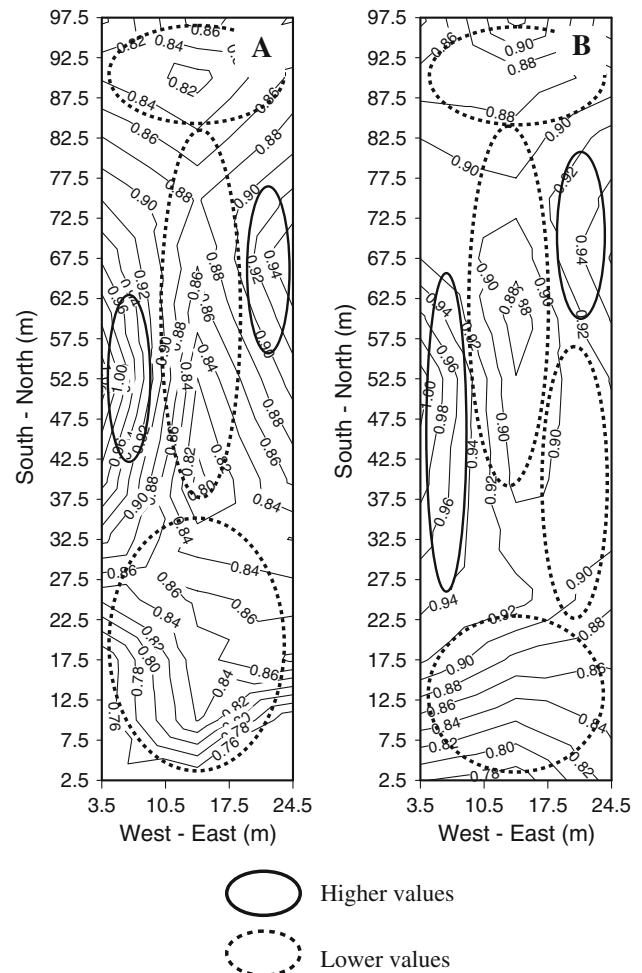


Fig. 5 Contour map of: predicted (a) and measured ρ_b (b)

where $N(h)$ is the number of sample pairs separated by a distance h , $z(x_i)$ is the measured sample value at point x_i , and $z(x_i + h)$ is the measured sample value at a distance h from x_i .

Results and discussion

Figure 3a presents the relationship between volumetric water content (θ) and output of the ADR probe (v) for Fuchu Honmachi soil, which mathematically can be expressed in Eq. 4. This equation was reliable mainly in the range of 0–0.6% volumetric water content. For such range, the result gained from Eq. 4 overestimated that of Topp et al. (1980) (Figure 3b); thus the specific ADR calibration was properly applicable for this study.

$$\theta_{\text{ADR}} = -0.104 + 2.158v - 3.567v^2 + 2.132v^3 \quad (4)$$

Comparison between the predicted and the measured parameters of the field experiment are shown in Fig. 4a

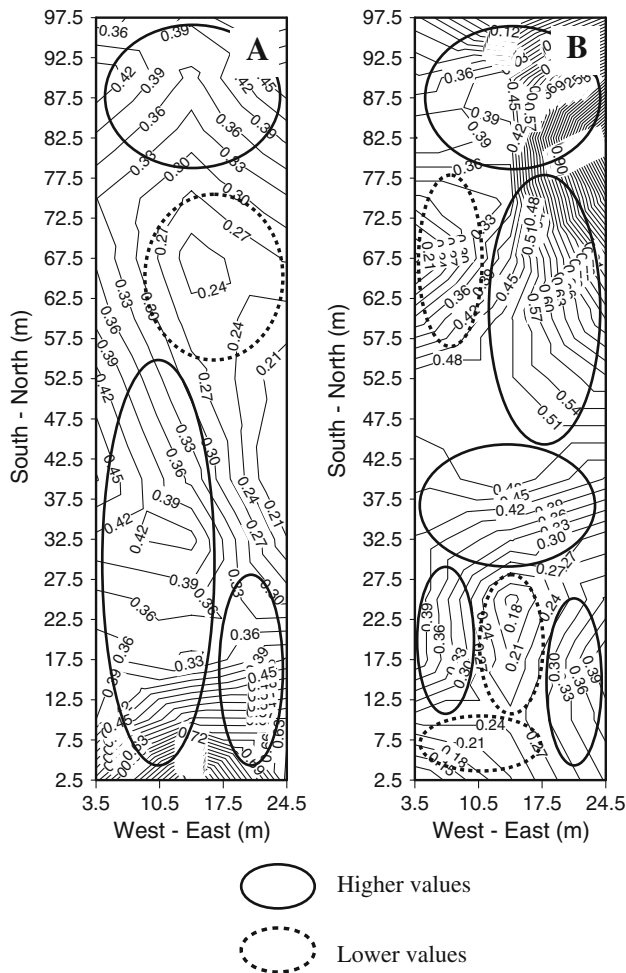


Fig. 6 Contour map of: predicted (a) and measured K_s (b)

(volumetric water content), b (dry bulk density), and c (saturated hydraulic conductivity). The predicted data agreed with the measured ones, in which those followed the trend line $x = y$ with R^2 of 0.68 (RMSE = 0.029 g cm^{-3}) and R^2 of 0.71 (RMSE = 0.027 g cm^{-3}) for volumetric water content and dry bulk density, respectively. Since the errors were less than the average ADR error, i.e., 3% (Gaskin and Miller 1996) and the error for common soils, i.e., 4–15% (Tominaga et al. 2002), the results can be acceptable. On the other hand, although the predicted (by NSMC model with $K_{so} = 0.49 \text{ cm d}^{-1}$, $\tau = 0.54$, $\rho_s = 2.79 \text{ g cm}^{-3}$, and $\rho_{bo} = 0.79 \text{ g cm}^{-3}$) and the measured saturated hydraulic conductivity seemed to be less fitted the line ($R^2 = 0.45$), the error (RMSE = 0.098 cm d^{-1} or 23% deviated from the average data) was considerably lower than its common error, i.e., 58–116% (Ciolarro and Romano 1995). Therefore, the result was still reasonable.

In spatial case, the agreement between the predicted and the measured parameters can be visually observed from

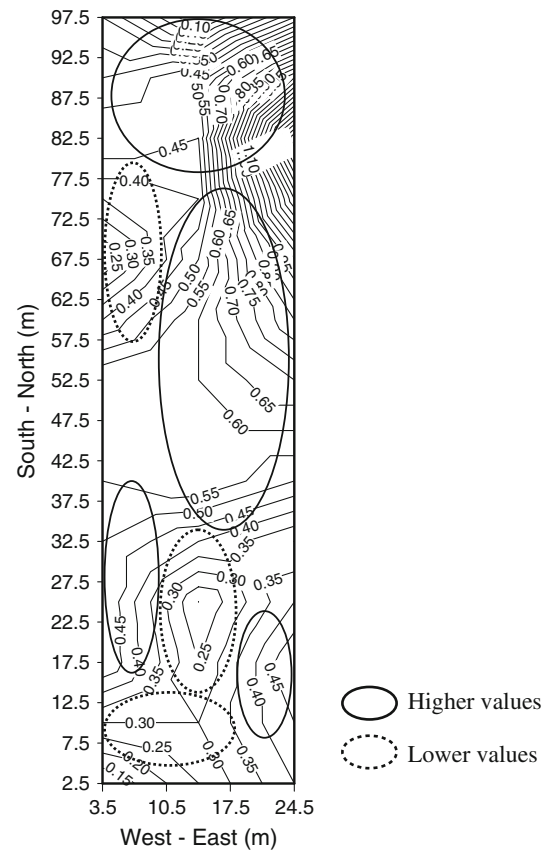


Fig. 7 Contour map of subsurface percolation rate

their contour maps, as shown in Figs. 5 and 6, for dry bulk density and saturated hydraulic conductivity, respectively. The lower dry bulk densities covered almost the entire field, except the western part around the coordinate of [5, 52.5] m and the eastern part around the coordinate of [21, 67.5] m, where the values was higher (Fig. 5a, b). Accordingly, the higher saturated hydraulic conductivities distributed in most part of the field excluding the part around the coordinate of [15, 67.5] m (predicted data), also the coordinate of [5, 67.5] m, [15, 22.5] m, and [10.5, 7.5] m (measured data), where it was lower (Fig. 6a, b). This indicated that the distribution of the predicted data agreed with that of the measured ones, and the distribution of the saturated hydraulic conductivities closely related to that of the dry bulk densities.

Correlating the contour map of both the dry bulk densities and the saturated hydraulic conductivities to that of the subsurface percolation rate (Fig. 7) showed that they corresponded one to another. The location with higher dry bulk densities correlated to that with lower saturated hydraulic conductivities and lower subsurface percolation rates, and vice versa, particularly in the part ranged from the middle to the northern of the field.

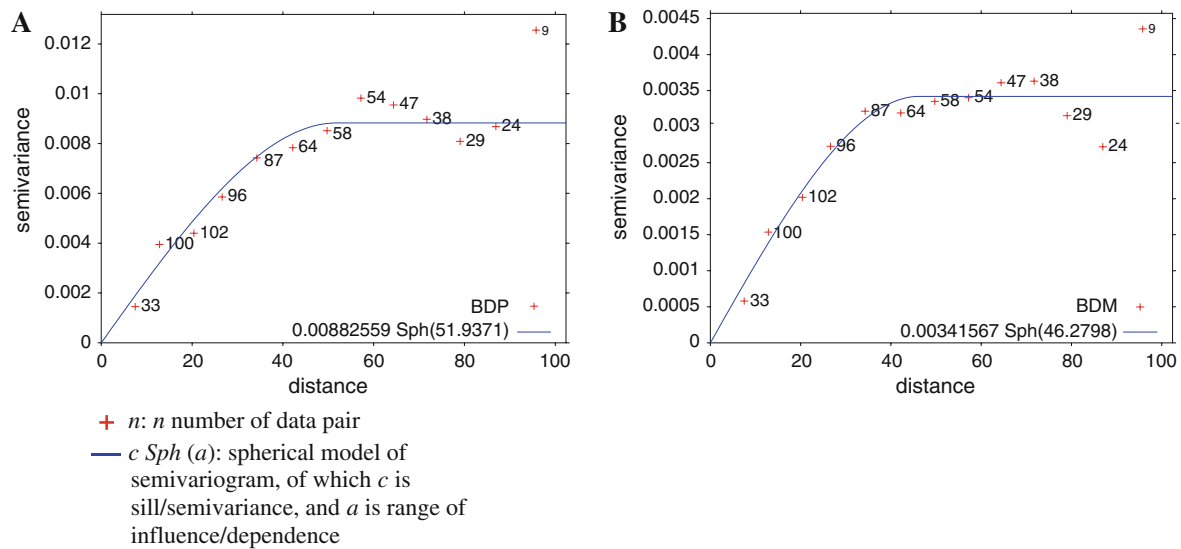


Fig. 8 Semivariogram of: predicted (a) and measured ρ_b (b)

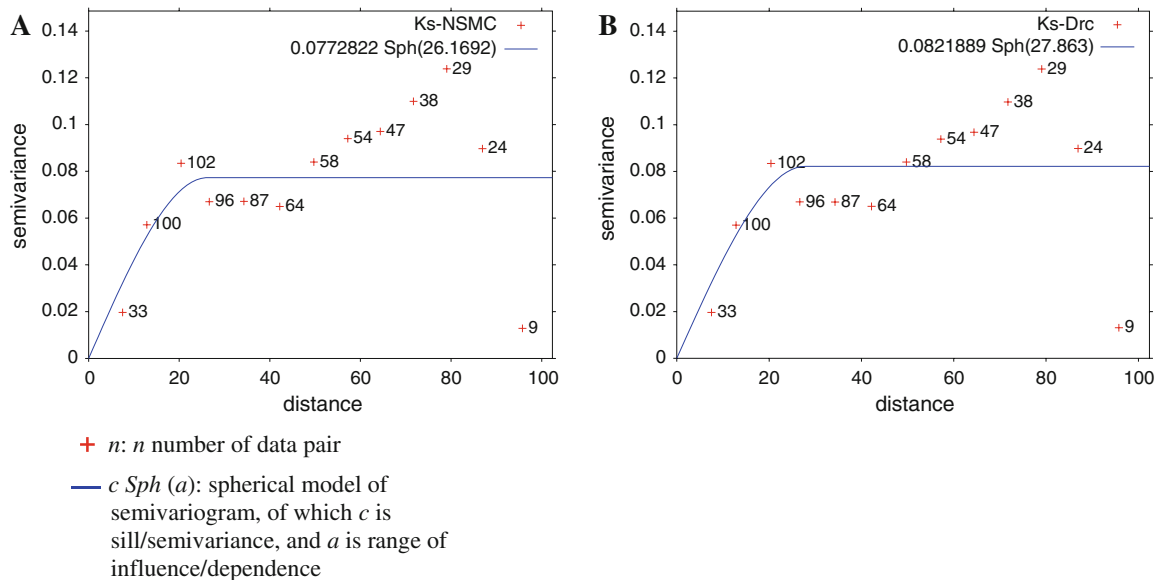


Fig. 9 Semivariogram of: predicted (a) and measured K_s (b)

The coincidence between the predicted and the measured parameters, and the close correspondence of those parameters to the subsurface percolation rate can be explicitly identified from their semivariograms shown in Figs. 8a, b (dry bulk densities), 9a and b (saturated hydraulic conductivities), and 10 (subsurface percolation rate). The predicted and the measured dry bulk densities had similar semivariogram trend in which the data were spatially correlated up to 46.3 and 51.9 m, respectively. The semivariogram of the predicted saturated hydraulic conductivity was also agreed well with that of the measured one, and the data were spatially depended within the

distance of 26.2–27.9 m. Accordingly, the subsurface percolation rate showed the similar pattern in semivariogram as well as its range of influence to the saturated hydraulic conductivity.

Among the presented results above, the spatial variability of the dry bulk densities and the subsurface percolation rate had the lowest correspondence. Nevertheless, according to Bagarello and Sgroi (2004), Mulla and McBratney (2000), and Mohanty et al. (1994) reported that the variation of the saturated flow rate tended to be significantly greater than others soil properties, i.e., 36–372%, thus the results in general can be accepted and might be

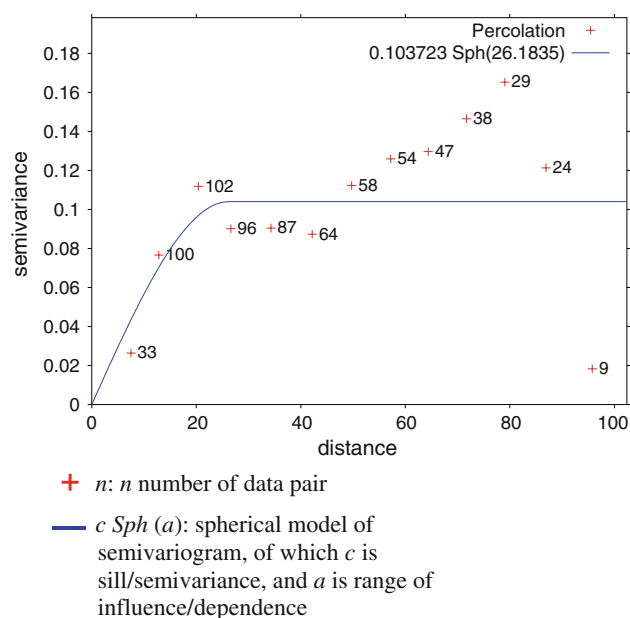


Fig. 10 Semivariogram of subsurface percolation rate

useful for supporting better cultivation practices like as puddling preparation, and water and/or pesticide fate management in the paddy field.

Conclusion

The spatial variability of saturated hydraulic conductivity in a paddy field was successfully predicted and characterized from the dielectric (ADR) properties of the dry bulk density as well as the volumetric water content by using NSMC and geostatistic model. And, it was closely corresponded to the spatial variability of the subsurface percolation rate in which both the data were spatially correlated within the same distance of 26.2–27.9 m.

Acknowledgment The authors thank Mr. Souphasay Komany, a former master student of Department of International Environmental and Agricultural Sciences (IEAS), TUAT, Japan for his permission to use the subsurface percolation data and for his cooperation in conducting the experiment. We also would like to thank Dr. Hirozumi Watanabe, an assistance professor of IEAS Department of TUAT for his valuable support during the study.

References

- Ahuja LR, Cassel DK, Bruce RR, Barnes BB (1989) Evaluation of spatial distribution of hydraulic conductivity using effective porosity data. *Soil Sci Soc Am J* 148:404–411
- Arya LM, Dierolf TS, Sofyan A, Widjaja-Adhi IPG, van-Genuchten MTh (1998) Field measurement of the saturated hydraulic conductivity of a macroporous soil with unstable subsoil structure. *Soil Sci* 163(11):841–852
- Bagarello V, Sgroi A (2004) Using the single-ring infiltrometer method to detect temporal change in surface soil field-saturated hydraulic conductivity. *Soil Tillage Res* 76:13–24
- Ciolarro G, Romano N (1995) Spatial variability of the hydraulic properties of a volcanic soil. *Geoderma* 65:263–282
- Clark I (1979) *Practical geostatistics*. Applied Science Publisher Ltd., London, p 60
- Clothier BE, Smethem KRJ (1990) Combining laboratory and field measurement to define the hydraulic properties of soil. *Soil Sci Soc Am J* 54(2):299–304
- Gaskin GD, Miller JD (1996) Measurement of soil water content using simplified impedance measuring technique. *J Agric Eng Res* 63:153–160
- Julia MF, Monreal TE, Jimenez ASC, Melendez EG (2004) Constructing a saturated hydraulic conductivity map of Spain using pedotransfer function and spatial prediction. *Geoderma* 123:257–277
- Kawaguchi K, Kyuma K (1974) Paddy soil in tropical Asia, part 2: description of material characteristics. *Southeast Asian Stud* 12(2):177–192
- Libardi PL, Reichardt K, Nielsen DR, Biggar JW (1980) Simple field method for estimating soil hydraulic conductivity. *Soil Sci Soc Am J* 44:3–7
- Malone RW, Logson S, Shipitalo MJ, Rice JW, Ahuja L, Ma L (2003) Tillage effect on macroporosity and herbicide transport in percolate. *Geoderma* 16:191–215
- Miyazaki T (1996) Bulk density dependence of air entry suctions and saturated hydraulic conductivities of soils. *Soil Sci* 161:84–490
- Mohanty BP, Ankeny MD, Horton R, Kanwar RS (1994) Spatial analysis of hydraulic conductivity measured using disc infiltrometers. *Water Resour Res* 30:2489–2498
- Mulla DJ, McBratney AB (2000) Soil spatial variability. In: Summer ME (ed) *Handbook of soil science*. CRC Press Inc., New York, pp 321–350
- Nishimura, T, Wijaya K, Kato M, Miyazaki T (2007) Estimation of saturated hydraulic conductivity of andisol by dry bulk density. In: *Proceedings of the 2nd Asian conference on precision agriculture*, Pyeontaek-Korea, 2007
- Regalado CM, Carpena RM (2004) Estimating the saturated hydraulic conductivity in a spatially variable soil with different permeameters: a Stochastic Kozeny-Carman relation. *Soil Tillage Res* 77:189–202
- Reynolds WD, Elrick DE (1991) Determination of hydraulic conductivity using a tension infiltrometer. *Soil Sci Soc Am J* 55:633–639
- Setiawan, BI, Rudiyanto, Wijaya K, Nishimura T (2004) Determination of soil volumetric water content and dry bulk density using ADR probe with artificial neural network. In: *Proceedings of the 3rd international seminar on toward harmonization between development and environmental conservation in biological production*, JSPS-DGHE Core University Program in Applied Biosciences. Banten, Indonesia, 3–5 December, 2004
- Souphasay, K, Nguyen MHT, Vu SH, Watanabe H (2003) Pesticide fate and transport in paddy field: result of water balance monitoring. In: *Proceedings of the 4th international symposium on environmental issues in Korea and Japan: management of River environment and material cycle in paddy field biotope*, Tokyo University of Agriculture and Technology (TUAT), Tokyo, Japan, December 2003
- Tominaga TT, Cassaro FAM, Bacchi OOS, Reichardt K, Oliveira JCM, Timm LC (2002) Variability of soil water content and bulk density in a sugarcane field. *Aust J Soil Res* 40:605–614
- Topp GC, Davis JL, Annan AP (1980) Electromagnetic determination of soil water content: measurement in coaxial transmission lines. *Water Resour Res* 16:574–582

- Vu SH, Watanabe H, Ishihara S, Ueji M, Tanaka H (2003) Fate and transport of rice pesticide in agricultural surface water: model concept and testing for river water compartment. In: Proceedings of the 4th international symposium on environmental issues in Korea and Japan: management of river environment and material cycle in paddy field biotope, Tokyo University of Agriculture and Technology (TUAT), Tokyo, Japan, December 2003
- Wijaya K, Nishimura T, Kato M (2005) Estimation of spatially distributed physical properties of Andisol soil using dielectric constant technique. In: Proceedings of the 7th symposium on agricultural science 2005 on the improvement of the national agriculture condition and production, Indonesian Agricultural Sciences Association (IASA), Tokyo, Japan, March 26, 2005
- Wijaya K, Kuncoro PH (2008) Application of dielectric constant method to predict spatial variability of soil permeability on a potato cropping field. *J Inovasi* 1(2):67–77
- Wijaya K, Nishimura T, Kato M (2003) Estimation of dry bulk density of soil using amplitude domain reflectometry probe. *J Jpn Soc Soil Phys* 95:63–73
- Wijaya K, Nishimura T, Kato M, Nakagawa M (2004) Field estimation of soil dry bulk density using amplitude domain reflectometry data. *J Jpn Soc Soil Phys* 97:3–12
- Wooding RA (1968) Steady infiltration from a shallow circular pond. *Water Resour Res* 4:1259–1273
- Zhuang J, Nakayama K, Yu GR, Miyazaki T (2001) Predicting unsaturated hydraulic conductivity of soil based on some basic soil properties. *Soil Tillage Res* 59:143–154



From: Prof. Dr. Chen-Wuing LIU <lcw@gwater.agec.ntu.edu.tw>

Subject: PAWE - Your revision is past due

To: kwijaya77@yahoo.com

Date: Sunday, September 13, 2009, 9:36 AM

Ref.: Ms. No. PAWE-D-09-00025

Characterizing Spatial Variability of Saturated Hydraulic Conductivity in a Paddy Field Based on Dielectric Dry Bulk Density Data Paddy and Water Environment

Dear Dr. Wijaya,

The revision of PAWE-D-09-00025 was expected by 11-09-2009.

You have been sent 0 reminder notices. The last one was sent on .

If you require more time, please contact the journal office. If you are ready to submit your revision, then please go to <http://paweb>

Your username is: kwijaya77

Your password is: wijaya766323

Kind regards,

Prof. Yu-Pin LIN

Chief Managing Editor (Editorial Office)

Paddy and Water Environment

KLN FAPERTA UNSOED



Krissandi Wijaya <kwijaya77@gmail.com>

about your submission No. PAWE-D-09-00025

yplin <yplin@ntu.edu.tw>

Mon, Sep 14, 2009 at 7:12 PM

To: kwijaya77@yahoo.com, kwijaya77@gmail.com

Dear Krissandi WIJAYA,

According to the forwarded email from Dr. Cheng as following, you are needing additional revisiong days and going to resubmit your revision at the end of this month. We hope to receive your revision at the end of this month.

Best regards,

Yu-Pin Lin,
Chief Managing Editor
Paddy and Water Environment

email from Dr. Cheng:

Dear PAWEE Journal Committee,

I do apologize for being late to submit my revised paper, entitled "**Characterizing Spatial Variability of Saturated Hydraulic Conductivity in a Paddy Field Based on Dielectric Dry Bulk Density Data in Accordance to Subsurface Percolation**" (No. PAWE-D-09-00025), due to the lack of supporting references still. If it is possible, I would like to have an additional time (until the end of September 2009) to prepare the full revision. However, I would surely submit the revised paper soon after I have the sufficient references.

Thank you very much for your great assistance. I am looking forward for your kind confirmation.

With best regards,
Krissandi WIJAYA

Agricultural Engineering Study Program
Faculty of Agriculture, Jenderal Soedirman University
Jl. dr. Soeparno Kampus Karangwangkal PO BOX 125 Purwokerto 53123
Tel./Fax.+62-281-638791, Mobile Ph. +62-813-9104-4879
E-mail: kwijaya77@yahoo.com / kwijaya77@gmail.com



Krissandi Wijaya <kwijaya77@gmail.com>

Re: PAWE: Your manuscript entitled Spatial Variability of Soil Saturated Hydraulic Conductivity in Paddy Field in Accordance to Subsurface Percolation

Krissandi Wijaya <kwijaya77@yahoo.com>

Wed, Nov 18, 2009 at 3:57 PM

To: "Prof. Budi I. Setiawan" <budindra@yahoo.com>

Cc: "Prof. Budi Indra Setiawan" <budindra@ipb.ac.id>

Dear Prof. Budi,

Dengan ini kami foward-kan the announcement email dari PAWE Journal terkait dengan acceptance paper yang berjudul "Spatial Variability of Soil Saturated Hydraulic Conductivity in Paddy Field in Accordance to Subsurface Percolation".

Terima kasih banyak atas perhatiannya.

With best regards,
Sandy

----- Forwarded Message -----

From: Chen-Wuing LIU <lcw@gwater.agec.ntu.edu.tw>**To:** kwijaya77@yahoo.com**Sent:** Sun, November 15, 2009 5:56:36 PM**Subject:** PAWE: Your manuscript entitled Spatial Variability of Soil Saturated Hydraulic Conductivity in Paddy Field in Accordance to Subsurface Percolation

Ref.: Ms. No. PAWE-D-09-00025R1

Spatial Variability of Soil Saturated Hydraulic Conductivity in Paddy Field in Accordance to Subsurface Percolation
Paddy and Water Environment

Dear Dr. Wijaya,

I am pleased to tell you that your work has now been accepted for publication in Paddy and Water Environment.

It was accepted on 15-11-2009.

Thank you for submitting your work to this journal.

With kind regards

Yu-Pin LIN, Ph.D.
Chief Managing Editor (Editorial Office)
Paddy and Water Environment



Krissandi Wijaya <kwijaya77@gmail.com>

Fw: Copyright Transfer Statement (CTS) for your article in Paddy and Water Environment (190)

Krissandi Wijaya <kwijaya77@yahoo.com>
To: "Budi I. Setiawan" <budindra@yahoo.com>
Cc: "Prof. Budi Indra Setiawan" <budindra@ipb.ac.id>

Wed, Nov 18, 2009 at 4:02 PM

----- Forwarded Message -----

From: Springer <springerauthorquery@springeronline.com>
To: "kwijaya77@yahoo.com" <kwijaya77@yahoo.com>
Sent: Wed, November 18, 2009 11:04:02 AM
Subject: Copyright Transfer Statement (CTS) for your article in Paddy and Water Environment (190)

Dear Author,

Journal title:	Paddy and Water Environment
Article title:	Spatial Variability of Soil Saturated Hydraulic Conductivity in Paddy Field in Accordance to Subsurface Percolation
DOI:	10.1007/s10333-009-0190-x
Corresponding Author:	Krissandi Wijaya
Copyright transferred to:	Springer-Verlag
Transferred on:	Wed Nov 18 05:04:02 CET 2009

Please note: This e-mail is a confirmation of your copyright transfer and was sent to you only for your own records.

The copyright to this article is transferred to

"Springer-Verlag"

(for U.S. government employees: to the extent transferable) effective if and when the article is accepted for publication. The author warrants that his/her contribution is original and that he/she has full power to make this grant. The author signs for and accepts responsibility for releasing this material on behalf of any and all co-authors. The copyright transfer covers the exclusive right and license to reproduce, publish, distribute and archive the article in all forms and media of expression now known or developed in the future, including reprints, translations, photographic reproductions, microform, electronic form (offline, online) or any other reproductions of similar nature.

An author may self-archive an author-created version of his/her article on his/her own website. He/she may also deposit this version on his/her institution's and funder's (funder designated) repository at the funder's request or as a result of a legal obligation, including his/her final version, provided it is not made publicly available until after 12 months of official publication. He/she may not use the publisher's PDF version which is posted on www.springerlink.com for the purpose of self-archiving or deposit. Furthermore, the author may only post his/her version provided acknowledgement is given to the original source of publication and a link is inserted to the published article on Springer's website. The link must be accompanied by the following text: "The original publication is available at www.springerlink.com".

The author is requested to use the appropriate DOI for the article. Articles disseminated via www.springerlink.com are indexed, abstracted and referenced by many abstracting and information services, bibliographic networks, subscription agencies, library networks and consortia.

After transfer of the copyright by the corresponding author, changes of authorship or in the order of the authors listed will not be accepted by Springer.

This is an automated e-mail; please do not reply to this account. If you have any questions, please go to our [help pages](#).

Thank you very much.

Kind regards,
Springer Author Services

(1)_Spatial variability of soil saturated hydraulic conductivity in paddy field in accordance to subsurface percolation

by Krissandi Wijaya

Submission date: 03-Apr-2023 06:33AM (UTC+0700)

Submission ID: 2053840908

File name: ivity_in_paddy_field_in_accordance_to_subsurface_percolation.pdf (523.78K)

Word count: 4753

Character count: 21067

Spatial variability of soil saturated hydraulic conductivity in paddy field in accordance to subsurface percolation

K. Wijaya · T. Nishimura · B. I. Setiawan ·
S. K. Saptomo

Received: 23 June 2009 / Accepted: 15 November 2009 / Published online: 1 December 2009
© Springer-Verlag 2009

Abstract Insufficient puddling with inappropriate implements or imprecise time/intensity may alter saturated water flow in paddy soil spatially or temporary due to change in aggregate size distribution, dry bulk density, saturated hydraulic conductivity, and percolation rate of the soil. In this study, spatial variability of saturated hydraulic conductivity (K_s), a key parameter of the saturated water flow, in Fuchu Honmachi paddy plot (100 m × 28 m) was characterized based on dielectric or ADR dry bulk density (ρ_{b_ADR}) with help of non-similar media concept (NSMC) and geostatistics model to meet its correlation to subsurface percolation. A 100 cc core and an ADR data were sampled from each sub-plot (7 m × 7.5 m), and then were used for measuring and

predicting ρ_b and K_s . The predicted data agreed with the measured ones, in which they fitted well the $x = y$ line with RMSE of $0.029 \text{ cm}^3 \text{ cm}^{-3}$ ($R^2 = 0.68$), 0.027 g cm^{-3} ($R^2 = 0.71$) (ρ_b), and 0.098 cm d^{-1} ($R^2 = 0.45$) for θ , ρ_b , and K_s , respectively. The predicted ρ_b and K_s had similar trend in spatial variability to the measured ones particularly within the distance of 46.3–51.9 m and 26.2–27.9 m, respectively. The spatial variability of the predicted K_s coincided to that of the subsurface percolation rate, in which they had similar distance of dependence. The results indicated that the presenting method can be reasonably accepted.

Keywords Spatial variability · Saturated hydraulic conductivity · Paddy field · Dielectric dry bulk density · Subsurface percolation

K. Wijaya (✉)
Agricultural Engineering Study Program, Jenderal Soedirman
University, Jl. dr. Soeparno Kampus Karangwangkal Kotak
Pos 125, Purwokerto 53123, Central Java, Indonesia
e-mail: kwijaya77@yahoo.com
URL: <http://faperta.unsoed.ac.id/>

T. Nishimura
Graduate School of Agriculture and Life Sciences,
The University of Tokyo, 1-1-1, Yayoi, Bunkyo-ku,
Tokyo 113-8657, Japan
e-mail: takun@soil.ena.u-tokyo.ac.jp
URL: <http://soil.ena.u-tokyo.ac.jp/>

B. I. Setiawan · S. K. Saptomo
Department of Civil and Environmental Engineering,
Bogor Agricultural University, Kampus IPB Darmaga,
Bogor 16680, Indonesia
e-mail: budindra@ipb.ac.id
URL: <http://web.ipb.ac.id/~sil-ipb/>

S. K. Saptomo
e-mail: ddody@yahoo.com
URL: <http://web.ipb.ac.id/~sil-ipb/>

Introduction

Saturated water flow is an important factor in understanding the dynamic process of water and solute movement in soil. Although in most cases of upland field, saturated water flow is often used to designate an appropriate internal drain-ability for better crop growth (Arya et al. 1998). However, in paddy field it is considered to be undesirable since it may affect water balance instability, fertilizer inefficiency, and results in groundwater contamination by pesticide through subsurface percolation (Malone et al. 2003; Vu et al. 2003). Therefore, characterizing the saturated water flow and its distribution pattern in the paddy field is vital and worthy to be conducted to support better cultivation as well as to conserve aquatic environment.

Saturated hydraulic conductivity is a representative key parameter of the saturated water flow in soil. A number of

direct methods have been applied for determining saturated hydraulic conductivity (Reynolds and Elrick 1991; Clothier and Smethem 1990; Wooding 1968). However, most of the methods are difficult to use and often time consuming (Libardi et al. 1980). This triggered many researchers to develop prediction model for determining saturated hydraulic conductivity from some basic soil physical properties (Julia et al. 2004; Regalado and Carpena 2004; Zhuang et al. 2001; Miyazaki 1996; Ahuja et al. 1989).

Wijaya and Kuncoro (2008), Wijaya et al. (2004, 2003), and hereafter Setiawan et al. (2004) developed a simple method for predicting volumetric water content and dry bulk density based on dielectric constant data produced by amplitude domain reflectrometer (ADR). By using five types of upland field soils, namely TUAT's Andisol, Fukaya's Alluvial, Bogor's Latosol, Cidanau-Banten's Brown Alluvial, and Pratin-Purbalingga's soil, it was found that the predicted values of such physical properties agreed well with the measured ones. Accordingly, employing the predicted data to NSMC model of Miyazaki (1996) to determine saturated hydraulic conductivity as well as its spatial variability in the fields was acceptable (Wijaya and Kuncoro 2008; Wijaya et al. 2005; Nishimura et al. 2007). However, in case of wetland field soils such as paddy field, the method has not been excessively applied yet.

This study was aimed to predict and to characterize spatial variability of saturated hydraulic conductivity in a paddy field based on dielectric (ADR) properties of dry bulk density as well as volumetric water content, and then to correlate the results to the field-distributed subsurface percolation.

Methodology

Experimental plot and soil properties

The experimental plot of 100 m × 28 m in large was prepared at Fuchu Honmachi paddy field (35°41' N, 139°29' E, 59 MSL) of Tokyo University of Agriculture and Technology (TUAT), Japan in the end of summer 2003. A number of 39 undisturbed soil and ADR samples were collected from every 7 m × 7.5 m subplots (Fig. 1) at the depth of about 15 cm by using 100 cc core and ADR probe, respectively. Additional disturbed soil samples were randomly taken from the plot for determining some soil properties as described in Table 1, and for ADR calibration purpose.

Calibration of ADR probe

The disturbed soil samples were packed into acrylic cylinder of 11 cm in inner diameter and 8 cm in height (Fig. 2). After the sample was weighed by using electric

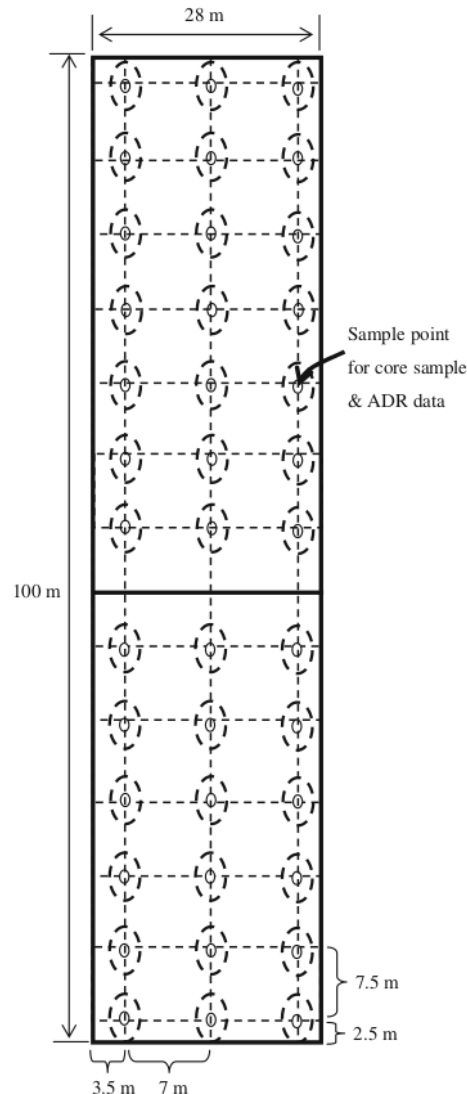


Fig. 1 Experimental plot of Fuchu Honmachi paddy field

balance, the ADR probe was inserted vertically into the sample, and its output voltage was then recorded by using a digital voltmeter. Volumetric water content and the output voltage were plotted and fitted by using simple least-square method to obtain the calibration equation.


Procedure to predict saturated hydraulic conductivity

The obtained calibration equation was used to predict soil volumetric water content (θ), and the predicted data was then substituted in Eq. 1 (Wijaya et al., 2003) to calculate the dry bulk density (ρ_b) as follows:

Table 1 Physical properties of TUAT's Fuchu Honmachi paddy field soil

Parameters (unit)	Value
Texture (g kg ⁻¹), sand:silt:clay	0.38:0.32:30 (light clay, LiC) ^a
Organic carbon content (g kg ⁻¹)	39.6
Particle density (g cm ⁻³)	2.50
Dry bulk density (g cm ⁻³)	0.77–1.01
Total density (g cm ⁻³)	1.19–1.48
Cation exchange capacity, CEC (cmol kg ⁻¹)	22.5

^a Textural class was defined based on the Japanese System of Textural Classification (Kawaguchi and Kyuma 1974)

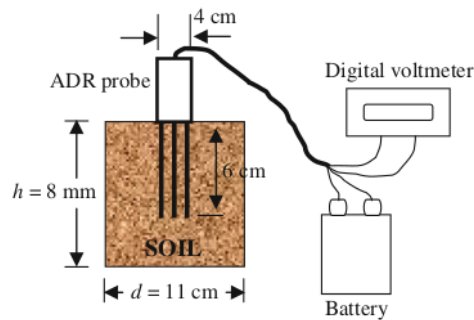**Fig. 2** Calibration of ADR probe

$$\rho_{b-ADR} = \rho_t - (\theta_{ADR} \cdot \rho_w) \quad (1)$$

where θ_{ADR} is the predicted volumetric water content by ADR (g cm⁻³), ρ_t is the total density (g cm⁻³), and ρ_w is the density of water (1 g cm⁻³).

Saturated hydraulic conductivity (K_s) was predicted from the ADR dry bulk density (ρ_{b-ADR}) by using the non-similar media concept (NSMC) model of Miyazaki (1996) (Eq. 2) with certain parameters, i.e., K_{so} , τ , ρ_s and ρ_{bo} , fitted prior to the prediction.


$$K_s = K_{so} \left[\frac{\left(\frac{\tau \rho_s}{\rho_{b-ADR}} \right)^{1/3} - 1}{\left(\frac{\tau \rho_s}{\rho_{bo}} \right)^{1/3} - 1} \right]^2 \quad (2)$$

where K_{so} is the measured saturated hydraulic conductivity of reference sample with a dry bulk density, ρ_{bo} , τ is the shape factor (it is limited by $\rho_b/\rho_s < \tau \leq 1$), and ρ_s is the measured particle density of the reference sample.

For laboratory scale, the volumetric water content and the dry bulk density were measured gravimetrically, while the saturated hydraulic conductivity was determined by falling head method. The data were used to validate the results of the predicted parameters obtained from the field observation.

Distribution of the predicted and the measured parameters, and also the subsurface percolation rate through puddled layer (0–15 cm in depth), monitored by Souphasay et al. (2003) under ponding condition, at 20 and 70 days after puddling were plotted in contour map. Their spatial variability were then analyzed by using semivariogram (Eq. 3), a well-known geostatistic tool (Clark 1979). Finally, those data were compared and corresponded one to another.

$$\gamma(h) = \frac{1}{2N(h)} \sum_{i=1}^{N(h)} [z(x_i) - z(x_i + h)]^2 \quad (3)$$

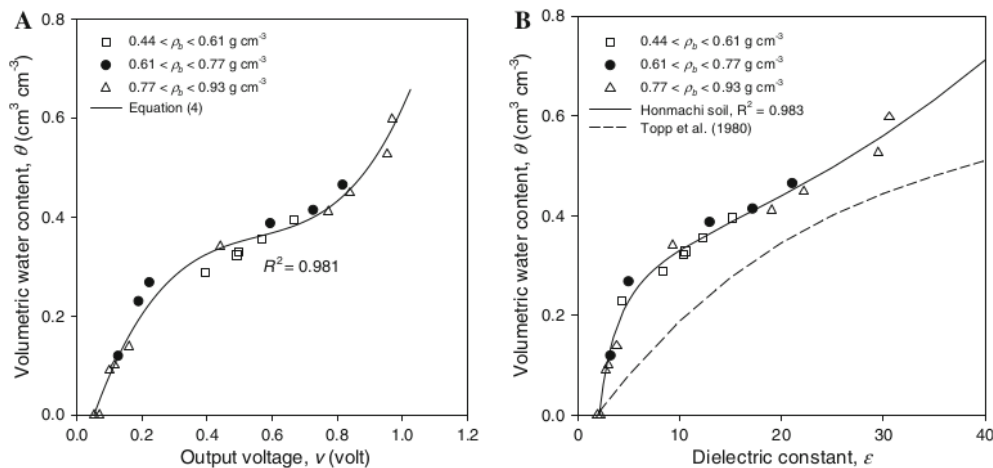**Fig. 3** Relationship between volumetric water content with: ADR output voltage (a) and dielectric constant (b)

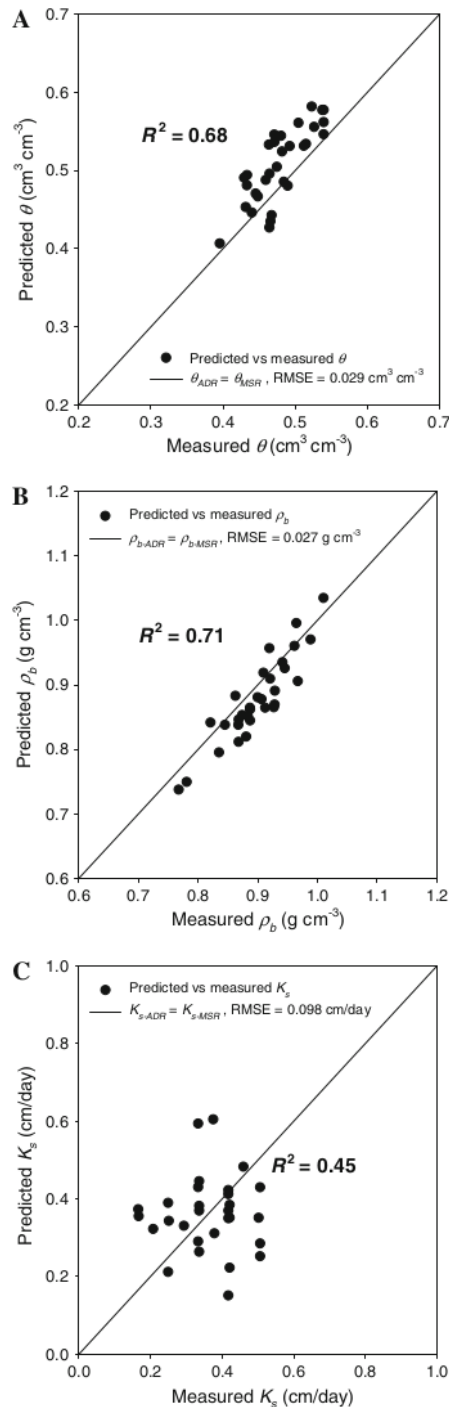


Fig. 4 Comparison between the predicted and the measured parameters: volumetric water content (a), dry bulk density (b), and saturated hydraulic conductivity (c)

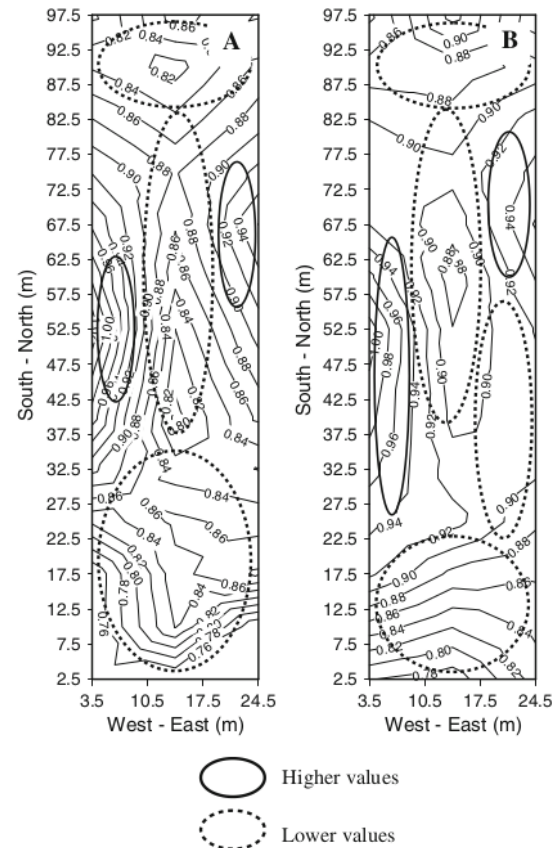


Fig. 5 Contour map of: predicted (a) and measured ρ_b (b)

where $N(h)$ is the number of sample pairs separated by a distance h , $z(x_i)$ is the measured sample value at point x_i , and $z(x_i + h)$ is the measured sample value at a distance h from x_i .

Results and discussion

Figure 3a presents the relationship between volumetric water content (θ) and output of the ADR probe (v) for Fuchu Honmachi soil, which mathematically can be expressed in Eq. 4. This equation was reliable mainly in the range of 0–0.6% volumetric water content. For such range, the result gained from Eq. 4 overestimated that of Topp et al. (1980) (Figure 3b); thus the specific ADR calibration was properly applicable for this study.

$$\theta_{\text{ADR}} = -0.104 + 2.158v - 3.567v^2 + 2.132v^3 \quad (4)$$

Comparison between the predicted and the measured parameters of the field experiment are shown in Fig. 4a

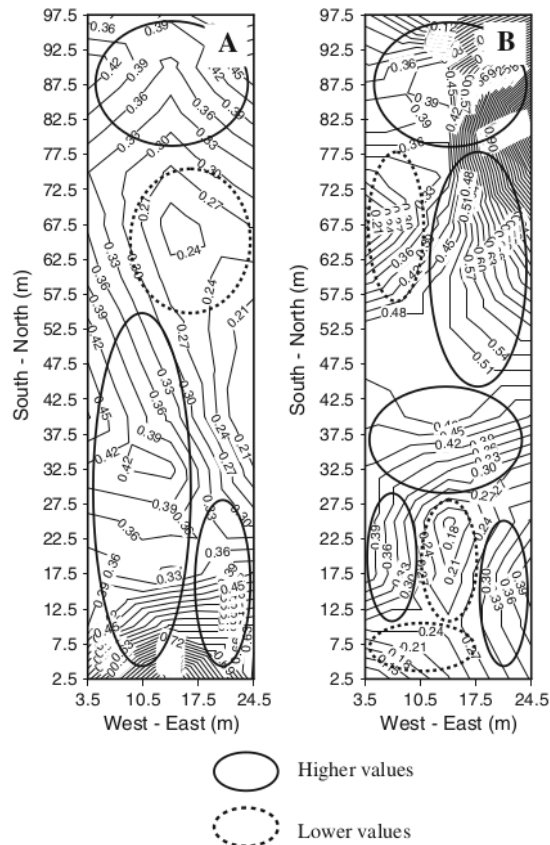


Fig. 6 Contour map of: predicted (a) and measured K_s (b)

(volumetric water content), b (dry bulk density), and c (saturated hydraulic conductivity). The predicted data agreed with the measured ones, in which those followed the trend line $x = y$ with R^2 of 0.68 (RMSE = 0.029 g cm⁻³) and R^2 of 0.71 (RMSE = 0.027 g cm⁻³) for volumetric water content and dry bulk density, respectively. Since the errors were less than the average ADR error, i.e., 3% (Gaskin and Miller 1996) and the error for common soils, i.e., 4–15% (Tominaga et al. 2002), the results can be acceptable. On the other hand, although the predicted (by NSMC model with $K_{so} = 0.49$ cm d⁻¹, $\tau = 0.54$, $\rho_s = 2.79$ g cm⁻³, and $\rho_{bo} = 0.79$ g cm⁻³) and the measured saturated hydraulic conductivity seemed to be less fitted the line ($R^2 = 0.45$), the error (RMSE = 0.098 cm d⁻¹ or 23% deviated from the average data) was considerably lower than its common error, i.e., 58–116% (Ciolarro and Romano 1995). Therefore, the result was still reasonable.

In spatial case, the agreement between the predicted and the measured parameters can be visually observed from

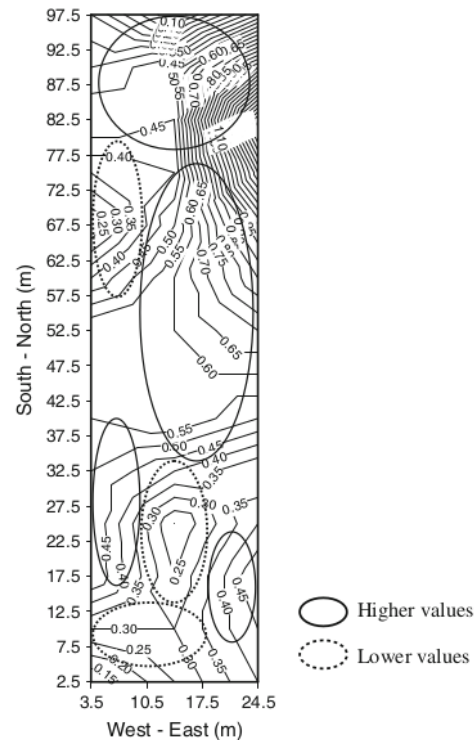


Fig. 7 Contour map of subsurface percolation rate

their contour maps, as shown in Figs. 5 and 6, for dry bulk density and saturated hydraulic conductivity, respectively. The lower dry bulk densities covered almost the entire field, except the western part around the coordinate of [5, 52.5] m and the eastern part around the coordinate of [21, 67.5] m, where the values was higher (Fig. 5a, b). Accordingly, the higher saturated hydraulic conductivities distributed in most part of the field excluding the part around the coordinate of [15, 67.5] m (predicted data), also the coordinate of [5, 67.5] m, [15, 22.5] m, and [10.5, 7.5] m (measured data), where it was lower (Fig. 6a, b). This indicated that the distribution of the predicted data agreed with that of the measured ones, and the distribution of the saturated hydraulic conductivities closely related to that of the dry bulk densities.

Correlating the contour map of both the dry bulk densities and the saturated hydraulic conductivities to that of the subsurface percolation rate (Fig. 7) showed that they corresponded one to another. The location with higher dry bulk densities correlated to that with lower saturated hydraulic conductivities and lower subsurface percolation rates, and vice versa, particularly in the part ranged from the middle to the northern of the field.

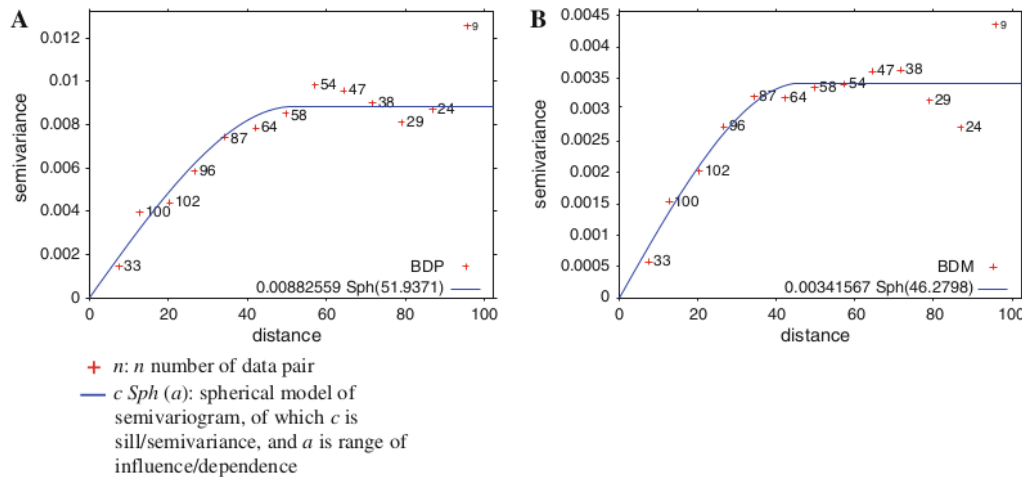


Fig. 8 Semivariogram of: predicted (a) and measured ρ_b (b)

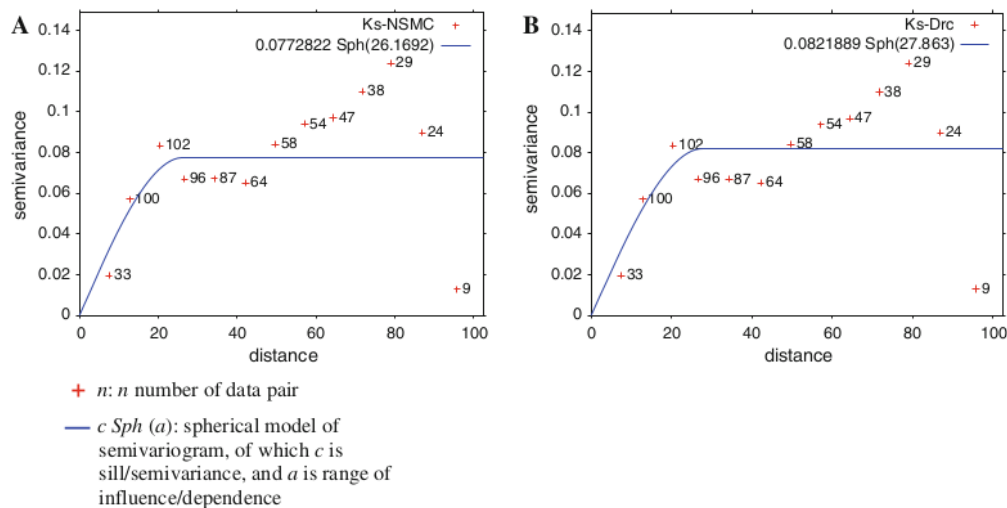


Fig. 9 Semivariogram of: predicted (a) and measured K_s (b)

The coincidence between the predicted and the measured parameters, and the close correspondence of those parameters to the subsurface percolation rate can be explicitly identified from their semivariograms shown in Figs. 8a, b (dry bulk densities), 9a and b (saturated hydraulic conductivities), and 10 (subsurface percolation rate). The predicted and the measured dry bulk densities had similar semivariogram trend in which the data were spatially correlated up to 46.3 and 51.9 m, respectively. The semivariogram of the predicted saturated hydraulic conductivity was also agreed well with that of the measured one, and the data were spatially dependent within the

distance of 26.2–27.9 m. Accordingly, the subsurface percolation rate showed the similar pattern in semivariogram as well as its range of influence to the saturated hydraulic conductivity.

Among the presented results above, the spatial variability of the dry bulk densities and the subsurface percolation rate had the lowest correspondence. Nevertheless, according to Bagarello and Sgroi (2004), Mulla and McBratney (2000), and Mohanty et al. (1994) reported that the variation of the saturated flow rate tended to be significantly greater than others soil properties, i.e., 36–372%, thus the results in general can be accepted and might be

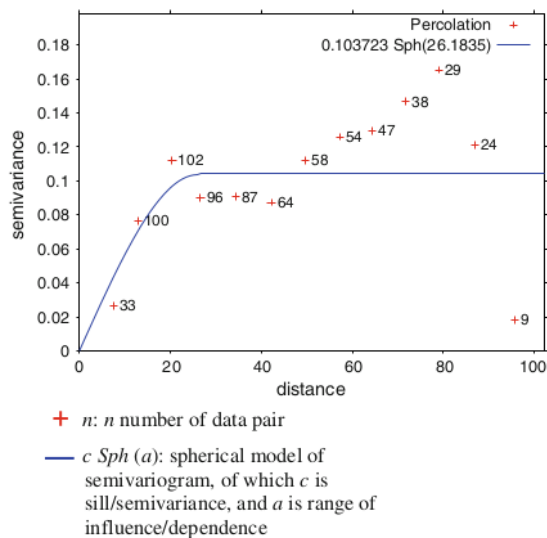


Fig. 10 Semivariogram of subsurface percolation rate

useful for supporting better cultivation practices like as puddling preparation, and water and/or pesticide fate management in the paddy field.

Conclusion

The spatial variability of saturated hydraulic conductivity in a paddy field was successfully predicted and characterized from the dielectric (ADR) properties of the dry bulk density as well as the volumetric water content by using NSMC and geostatistic model. And, it was closely corresponded to the spatial variability of the subsurface percolation rate in which both the data were spatially correlated within the same distance of 26.2–27.9 m.

Acknowledgment The authors thank Mr. Souphasay Komany, a former master student of Department of International Environmental and Agricultural Sciences (IEAS), TUAT, Japan for his permission to use the subsurface percolation data and for his cooperation in conducting the experiment. We also would like to thank Dr. Hirozumi Watanabe, an assistance professor of IEAS Department of TUAT for his valuable support during the study.

References

- Ahuja LR, Cassel DK, Bruce RR, Barnes BB (1989) Evaluation of spatial distribution of hydraulic conductivity using effective porosity data. *Soil Sci Soc Am J* 148:404–411
- Arya LM, Dierolf TS, Sofyan A, Widjaja-Adhi IPG, van-Genuchten MTh (1998) Field measurement of the saturated hydraulic conductivity of a macroporous soil with unstable subsoil structure. *Soil Sci* 163(11):841–852
- Bagarello V, Sgroi A (2004) Using the single-ring infiltrometer method to detect temporal change in surface soil field-saturated hydraulic conductivity. *Soil Tillage Res* 76:13–24
- Ciolarro G, Romano N (1995) Spatial variability of the hydraulic properties of a volcanic soil. *Geoderma* 65:263–282
- Clark I (1979) *Practical geostatistics*. Applied Science Publisher Ltd., London, p 60
- Clothier BE, Smethem KRJ (1990) Combining laboratory and field measurement to define the hydraulic properties of soil. *Soil Sci Soc Am J* 54(2):299–304
- Gaskin GD, Miller JD (1996) Measurement of soil water content using simplified impedance measuring technique. *J Agric Eng Res* 63:153–160
- Julia MF, Monreal TE, Jimenez ASC, Melendez EG (2004) Constructing a saturated hydraulic conductivity map of Spain using pedotransfer function and spatial prediction. *Geoderma* 123:257–277
- Kawaguchi K, Kyuma K (1974) Paddy soil in tropical Asia, part 2: description of material characteristics. *Southeast Asian Stud* 12(2):177–192
- Libardi PL, Reichardt K, Nielsen DR, Biggar JW (1980) Simple field method for estimating soil hydraulic conductivity. *Soil Sci Soc Am J* 44:3–7
- Malone RW, Logson S, Shipitalo MJ, Rice JW, Ahuja L, Ma L (2003) Tillage effect on macroporosity and herbicide transport in percolate. *Geoderma* 16:191–215
- Miyazaki T (1996) Bulk density dependence of air entry suctions and saturated hydraulic conductivities of soils. *Soil Sci* 161:84–490
- Mohanty BP, Ankeny MD, Horton R, Kanwar RS (1994) Spatial analysis of hydraulic conductivity measured using disc infiltrometers. *Water Resour Res* 30:2489–2498
- Mulla DJ, McBratney AB (2000) Soil spatial variability. In: Summer ME (ed) *Handbook of soil science*. CRC Press Inc., New York, pp 321–350
- Nishimura, T, Wijaya K, Kato M, Miyazaki T (2007) Estimation of saturated hydraulic conductivity of andisol by dry bulk density. In: *Proceedings of the 2nd Asian conference on precision agriculture, Pyeontaek-Korea, 2007*
- Regalado CM, Carpena RM (2004) Estimating the saturated hydraulic conductivity in a spatially variable soil with different permeameters: a Stochastic Kozeny-Carman relation. *Soil Tillage Res* 77:189–202
- Reynolds WD, Elrick DE (1991) Determination of hydraulic conductivity using a tension infiltrometer. *Soil Sci Soc Am J* 55:633–639
- Setiawan, BI, Rudiyanto, Wijaya K, Nishimura T (2004) Determination of soil volumetric water content and dry bulk density using ADR probe with artificial neural network. In: *Proceedings of the 3rd international seminar on toward harmonization between development and environmental conservation in biological production, JSPS-DGHE Core University Program in Applied Biosciences, Banten, Indonesia, 3–5 December, 2004*
- Souphasay, K, Nguyen MHT, Vu SH, Watanabe H (2003) Pesticide fate and transport in paddy field: result of water balance monitoring. In: *Proceedings of the 4th international symposium on environmental issues in Korea and Japan: management of River environment and material cycle in paddy field biotope, Tokyo University of Agriculture and Technology (TUAT), Tokyo, Japan, December 2003*
- Tominaga TT, Cassaro FAM, Bacchi OOS, Reichardt K, Oliveira JCM, Timm LC (2002) Variability of soil water content and bulk density in a sugarcane field. *Aust J Soil Res* 40:605–614
- Topp GC, Davis JL, Annan AP (1980) Electromagnetic determination of soil water content: measurement in coaxial transmission lines. *Water Resour Res* 16:574–582

- Vu SH, Watanabe H, Ishihara S, Ueji M, Tanaka H (2003) Fate and transport of rice pesticide in agricultural surface water: model concept and testing for river water compartment. In: Proceedings of the 4th international symposium on environmental issues in Korea and Japan: management of river environment and material cycle in paddy field biotope, Tokyo University of Agriculture and Technology (TUAT), Tokyo, Japan, December 2003
- Wijaya K, Nishimura T, Kato M (2005) Estimation of spatially distributed physical properties of Andisol soil using dielectric constant technique. In: Proceedings of the 7th symposium on agricultural science 2005 on the improvement of the national agriculture condition and production, Indonesian Agricultural Sciences Association (IASA), Tokyo, Japan, March 26, 2005
- Wijaya K, Kuncoro PH (2008) Application of dielectric constant method to predict spatial variability of soil permeability on a potato cropping field. *J Inovasi* 1(2):67–77
- Wijaya K, Nishimura T, Kato M (2003) Estimation of dry bulk density of soil using amplitude domain reflectometry probe. *J Jpn Soc Soil Phys* 95:63–73
- Wijaya K, Nishimura T, Kato M, Nakagawa M (2004) Field estimation of soil dry bulk density using amplitude domain reflectometry data. *J Jpn Soc Soil Phys* 97:3–12
- Wooding RA (1968) Steady infiltration from a shallow circular pond. *Water Resour Res* 4:1259–1273
- Zhuang J, Nakayama K, Yu GR, Miyazaki T (2001) Predicting unsaturated hydraulic conductivity of soil based on some basic soil properties. *Soil Tillage Res* 59:143–154

(1)_Spatial variability of soil saturated hydraulic conductivity in paddy field in accordance to subsurface percolation

ORIGINALITY REPORT

7%

SIMILARITY INDEX

6%

INTERNET SOURCES

6%

PUBLICATIONS

0%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

4%

★ worldwidescience.org

Internet Source

Exclude quotes Off

Exclude bibliography On

Exclude matches < 2%