

Ядерна фізика та енергетика Nuclear Physics and Atomic Energy

ISSN: 1818-331X (Print), 2074-0565 (Online)

Publisher: Institute for Nuclear Research of the National Academy of Sciences of Ukraine

Languages: Ukrainian, English

Periodicity: 4 times per year

DOI: 10.15407/jnpae

Open access peer reviewed journal

[Home page](#)
[About](#)
[Editorial Board](#)
 search

2021, Vol. 22	1	2	3	4
2020, Vol. 21	1	2	3	4
2019, Vol. 20	1	2	3	4
2018, Vol. 19	1	2	3	4
2017, Vol. 18	1	2	3	4
2016, Vol. 17	1	2	3	4
2015, Vol. 16	1	2	3	4
2014, Vol. 15	1	2	3	4
2013, Vol. 14	1	2	3	4
2012, Vol. 13	1	2	3	4
2011, Vol. 12	1	2	3	4
2010, Vol. 11	1	2	3	4
2009, Vol. 10	1	2	3	4
2008, Vol. 9	1(23)	2(24)	3(25)	
2007, Vol. 8	1(19)	2(20)	3(21)	4(22)
2006, Vol. 7	1(17)	2(18)		
2005, Vol. 6	1(14)	2(15)	3(16)	
2004, Vol. 5	1(12)	2(13)		
2003, Vol. 4	1(09)	2(10)	3(11)	
2002, Vol. 3	1(07)	2(08)		
2001, Vol. 2	1(03)	2(04)	3(05)	4(06)
2000, Vol. 1	1(01)	2(02)		

[On numeration of issues and volumes](#)

EDITOR-IN-CHIEF

[V.I. Slisenko](#)

Full Member of NASU

Doctor of Physical and Mathematical Sciences

Director of Institute for Nuclear Research of NASU (Kyiv)

DEPUTY EDITOR-IN-CHIEF

[V.I. Sugakov](#)

Corresponding Member of NASU

Doctor of Physical and Mathematical Sciences, Professor

Head of Department of Institute for Nuclear Research of NASU (Kyiv)

[V.V. Tryshyn](#)

Candidate of Physical and Mathematical Sciences

Deputy Director of Institute for Nuclear Research of NASU (Kyiv)

Head of Department of Institute for Nuclear Research of NASU (Kyiv)

EXECUTIVE SECRETARY

[V.I. Tretyak](#)

Candidate of Physical and Mathematical Sciences, Associate Professor

Institute for Nuclear Research of NASU (Kyiv)

EDITORIAL BOARD MEMBERS

[V.E. Aushev](#)

Doctor of Physical and Mathematical Sciences, Associate Professor

National Taras Shevchenko University of Kyiv (Kyiv)

[M.D. Bondarkov](#)

Doctor of Technical Sciences

Chornobyl Center for Nuclear Safety, Radioactive Waste and Radioecology (Slavutych)

[K.O. Bugaev](#)

Doctor of Physical and Mathematical Sciences

Bogolyubov Institute for Theoretical Physics (Kyiv)

[L.A. Bulavin](#)

Full Member of NASU

Doctor of Physical and Mathematical Sciences, Professor

National Taras Shevchenko University of Kyiv (Kyiv)

[V.V. Chumak](#)

Doctor of Biological Sciences

National Research Center for Radiation Medicine of NAMSU (Kyiv)

[F.A. Danevich](#)

Doctor of Physical and Mathematical Sciences, Professor

Institute for Nuclear Research of NASU (Kyiv)

V.Yu. Denisov

Corresponding Member of NASU

Doctor of Physical and Mathematical Sciences, Professor

Institute for Nuclear Research of NASU (Kyiv)

V.A. Gaichenko

Doctor of Biological Sciences, Professor

National University of Life and Environmental Sciences of Ukraine (Kyiv)

I.M. Gudkov

Full Member of Nat. Ac. of Agricultural Sci.

Doctor of Biological Sciences, Professor

National University of Life and Environmental Sciences of Ukraine (Kyiv)

V.O. Kashparov

Candidate of Phys. and Math. Sciences & Doctor of Biological Sciences, Professor

Ukrainian Institute of Agricultural Radiology (Chabany)

Ya.I. Kolesnychenko

Doctor of Physical and Mathematical Sciences, Professor

Institute for Nuclear Research of NASU (Kyiv)

A.I. Lypska

Doctor of Biological Sciences

Institute for Nuclear Research of NASU (Kyiv)

P.G. Lytovchenko

Doctor of Physical and Mathematical Sciences, Professor

Institute for Nuclear Research of NASU (Kyiv)

L.L. Lytvynskyi

Doctor of Physical and Mathematical Sciences

State Scientific Engineering Center of Control Systems and Emergency Response (Kyiv)

V.S. Marchenko

Doctor of Physical and Mathematical Sciences

Institute for Nuclear Research of NASU (Kyiv)

A.V. Nosovskyi

Full Member of NASU

Doctor of Technical Sciences, Professor

Institute for Safety Problems of Nuclear Power Plants of NASU (Kyiv)

V.M. Pavlovych

Doctor of Physical and Mathematical Sciences, Professor

Institute for Nuclear Research of NASU (Kyiv)

E.M. Pis'mennyi

Doctor of Technical Sciences, Professor

National Technical University of Ukraine "Igor Sikorsky Kyiv Polytechnic Institute" (Kyiv)

V.A. Plujko

Doctor of Physical and Mathematical Sciences, Professor

National Taras Shevchenko University of Kyiv (Kyiv)

V.M. Pugatch

Corresponding Member of NASU

Doctor of Physical and Mathematical Sciences, Professor

Institute for Nuclear Research of NASU (Kyiv)

A.T. Rudchyk

Doctor of Physical and Mathematical Sciences, Professor

Institute for Nuclear Research of NASU (Kyiv)

V.Yu. Storizhko

Full Member of NASU

Doctor of Physical and Mathematical Sciences, Professor

Institute of Applied Physics of NASU (Sumy)

A.P. Voiter

Doctor of Technical Sciences

Institute for Nuclear Research of NASU (Kyiv)

Yu.L. Zabulonov

Corresponding Member of NASU

Doctor of Technical Sciences, Professor

Institute of Environmental Geochemistry of NASU (Kyiv)

INTERNATIONAL ADVISORY EDITORIAL BOARD

R. Bernabei

Professor

INFN sezione Rome "Tor Vergata" and University of Rome "Tor Vergata" (Rome, Italy)

A. Giuliani

Professor

Universite Paris-Saclay, CNRS/IN2P3, IJCLab (Orsay, France)

K.W. Kemper

Professor

Florida State University (Tallahassee, USA)

M. Lattuada

Professor

INFN Laboratori Nazionali del Sud and University of Catania (Catania, Italy)

P. Ring

Professor

Technische Universitat Munchen (Garching, Germany)

K. Rusek


Professor

University of Warsaw (Warsaw, Poland)

S. Shlomo

Professor

Cyclotron Institute, Texas A&M University (College Station, USA)

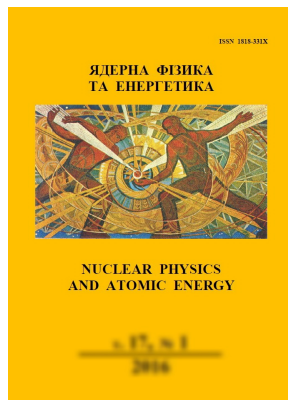

Ядерна фізика та енергетика Nuclear Physics and Atomic Energy

ISSN: 1818-331X (Print), 2074-0565 (Online)

Publisher: Institute for Nuclear Research of the National Academy of Sciences of Ukraine

Languages: Ukrainian, English

Periodicity: 4 times per year

DOI: 10.15407/jnpae

Open access peer reviewed journal

[Home page](#)
[About](#)
[Editorial Board](#)
 search

Vol. 22, issue # 4, 2021

<https://doi.org/10.15407/jnpae2021.04>

2021, Vol. 22	1	2	3	4
2020, Vol. 21	1	2	3	4
2019, Vol. 20	1	2	3	4
2018, Vol. 19	1	2	3	4
2017, Vol. 18	1	2	3	4
2016, Vol. 17	1	2	3	4
2015, Vol. 16	1	2	3	4
2014, Vol. 15	1	2	3	4
2013, Vol. 14	1	2	3	4
2012, Vol. 13	1	2	3	4
2011, Vol. 12	1	2	3	4
2010, Vol. 11	1	2	3	4
2009, Vol. 10	1	2	3	4
2008, Vol. 9	1(23)	2(24)	3(25)	
2007, Vol. 8	1(19)	2(20)	3(21)	4(22)
2006, Vol. 7	1(17)	2(18)		
2005, Vol. 6	1(14)	2(15)	3(16)	
2004, Vol. 5	1(12)	2(13)		
2003, Vol. 4	1(09)	2(10)	3(11)	
2002, Vol. 3	1(07)	2(08)		
2001, Vol. 2	1(03)	2(04)	3(05)	4(06)
2000, Vol. 1	1(01)	2(02)		

[On numeration of issues and volumes](#)

NUCLEAR PHYSICS

1 [Further results from DAMA/Libra-phase2 and perspectives](#)

R. Bernabei, P. Belli, A. Bussolotti, V. Caracciolo, F. Cappella, R. Cerulli, C. J. Dai, A. d'Angelo, N. Ferrari, A. Incicchitti, A. Leoncini, X. H. Ma, A. Mattei, V. Merlo, F. Montecchia, X. D. Sheng, Z. P. Ye

Pages 329–342; [Abstracts and references](#) [Full Text \(en\)](#)

2 [Determination of the nuclear radius parameter using the y-ray spectrometer](#)

P. N. Patil, G. B. Hiremath, A. Vinayak, M. M. Hosamani, V. P. Singh, N. M. Badiger

Pages 343–347; [Abstracts and references](#) [Full Text \(en\)](#)

ATOMIC ENERGY

3 [Principal provisions of the decommissioning concept for the WWR-M research reactor](#)

Yu. N. Lobach, E. D. Luferenko, M. V. Lysenko, V. N. Shevel

Pages 348–357; [Abstracts and references](#) [Full Text \(en\)](#)

RADIATION PHYSICS

4 [Ion-photon emission from titanium target under ion beam sputtering](#)

L. Jadoual, A. Afkir, A. El Boujlaidi, M. Ait El Fqih, R. Jourdani, A. Kaddouri

Pages 358–364;  [Abstracts and references](#)  [Full Text \(en\)](#)

RADIOBIOLOGY AND RADIOECOLOGY

- 5 [Speciation of uranium and radionuclides in the bottom sediments of premises 001/3 of the "Shelter" object](#)

O. O. Odintsov, L. A. Palamar, L. B. Chikur

Pages 365–374;  [Abstracts and references](#)  [Full Text \(ua\)](#)

- 6 [Impact of chronic irradiation of IMV 9096 and IMV 8614 strains of *Pseudomonas aeruginosa* on immunomodulatory properties of their lipopolysaccharide complex](#)

J. V. Shylyna, O. S. Molozhava, S. V. Litvinov, O. P. Dmitriev

Pages 375–381;  [Abstracts and references](#)  [Full Text \(ua\)](#)

- 7 [Dynamics of \$^{137}\text{Cs}\$ content in tissues and organs of Scots pine \(*Pinus sylvestris* L.\) in moist fairly infertile pine type of Polissya of Ukraine after Chernobyl accident](#)

V. P. Krasnov, O. O. Orlov, O. V. Zhukovsky

Pages 382–389;  [Abstracts and references](#)  [Full Text \(ua\)](#)

- 8 [Radon environmental hazard assessment for residents of the city of the western region of Ukraine](#)

O. O. Lebed, V. O. Myslinchuk, L. O. Klymenko, L. V. Hladun, A. V. Lysytsya

Pages 390–399;  [Abstracts and references](#)  [Full Text \(ua\)](#)

ENGINEERING AND METHODS OF EXPERIMENT

- 9 [Belarusian software for nuclear material accounting at the level of the regulatory body](#)

S. N. Sytova, A. P. Dunets, A. N. Kavalenka, S. V. Charapitsa

Pages 400–408;  [Abstracts and references](#)  [Full Text \(en\)](#)

- 10 [Nuclear security risks in Ukraine](#)

V. I. Gavriluk, S. S. Drapey, B. V. Kaydyk, V. I. Kirischuk, V. V. Parkhomenko, O. P. Romanova, A. V. Samsonenko, E. I. Katunin, A. V. Boyko

Pages 409–414;  [Abstracts and references](#)  [Full Text \(ua\)](#)

- 11 [Design development of double-layer beam shaping assembly using extension nozzle to increase the quality of epithermal neutron beam as a BNCT neutron source](#)

Bilalodin, A. Haryadi, Kartika Sari, Y. Sardjono, Rasito Tursinah

Pages 415–421;  [Abstracts and references](#)  [Full Text \(en\)](#)

Bilalodin^{1,*}, A. Haryadi¹, Kartika Sari¹, Y. Sardjono², Rasito Tursinah³

¹ *Department of Physics, Faculty of Mathematics and Natural Science,
Jenderal Soedirman University, Purwokerto, Indonesia*

² *Research Center for Accelerator Technology, National Research and Innovation Agency, Central Jakarta, Indonesia*

³ *Research Center for Applied Nuclear Technology, Bandung, Indonesia*

*Corresponding author: bilalodin@unsod.ac.id

DESIGN DEVELOPMENT OF DOUBLE-LAYER BEAM SHAPING ASSEMBLY USING EXTENSION NOZZLE TO INCREASE THE QUALITY OF EPITHERMAL NEUTRON BEAM AS A BORON NEUTRON CAPTURE THERAPY NEUTRON SOURCE

Double layer beam shaping assembly (DLBSA) is a system that moderates fast neutrons into epithermal neutrons. The epithermal neutrons that leave the aperture in the DLBSA system are broadened in the space, thereby reducing the intensity and homogeneity of the epithermal neutron beams. Therefore, it is necessary to improve the design. The development of the DLBSA design was carried out using an extension nozzle. The nozzles are designed using materials made in three configurations, namely Ni+LiF load polyethylene, Pb+LiF load polyethylene, and Bi+LiF load polyethylene. The simulation results show that the addition of a nozzle at the tip of the DLBSA can channel the beam more directionally with high intensity. The addition of nozzles with Ni+LiF load PE material produces an epithermal neutron beam that meets the IAEA standards.

Keywords: extension nozzle, double layer beam shaping assembly, epithermal neutron, boron neutron capture therapy.

1. Introduction

Boron neutron capture therapy (BNCT) is one of the cancer therapy methods currently developed. In BNCT therapy, a neutron beam is needed to induce the $^{10}\text{B}(n, \alpha)^7\text{Li}$ reactions in cancer cells. The key to a successful cancer therapy using the BNCT method is determined by, among others, the accumulation of ^{10}B in cancer cells and the availability of an appropriate neutron source. The reaction produces alpha and lithium particles that can damage the cancer cells [1].

Initially, nuclear reactors were used as the source of neutrons. However nuclear reactors are constrained by several things, which include requiring very tight security, the presence of radiation waste from fission reactions, very high costs in the establishment, and difficulty in concession [2, 3]. Hence, more environmentally friendly neutron sources are developed in form of tandem accelerators and proton accelerators [4, 5]. A proton accelerator produces fast neutrons using beryllium or lithium targets [6].

One type of proton accelerator is the cyclotron. It has been developed in many countries, including Korea and Japan. Korea developed the accelerator-based boron neutron capture therapy (AB-BNCT) and Japan developed the cyclotron-based epithermal neutron source (C-BENS). C-BENS uses protons with an energy of 30 MeV and a beryllium target.

The interaction of protons and beryllium targets produces fast neutrons through the reaction $^9\text{Be}(p, n)^9\text{B}$. Fast neutrons produced by a C-BENS accelerator emit energy up to 28 MeV with a total flux of $1.9 \cdot 10^{14} \text{ n/s/mA}^{-1}$ [7]. The neutrons emitted by the beryllium are highly energetic and need to be moderated into epithermal neutrons using beam shaping assembly (BSA) for BNCT. To fulfill epithermal neutrons as a neutron source for BNCT, a DLBSA model has been developed [8].

The DLBSA that has been developed is capable of producing an epithermal neutron flux close to the IAEA standard of $10^9 \text{ n/(cm}^2\cdot\text{s)}$. Epithermal neutrons flow through the aperture resulting in a neutron beam that radiates sideways (broadened in the space). As a result, the further away from the aperture the neutron beam decreases in intensity [9]. Therefore, it is necessary to have a new design of DLBSA that can reduce the neutron beam that spreads out from the aperture so that the epithermal neutrons are collected and channeled effectively. The approach in the new DLBSA design is by adding a nozzle channel at the end of the aperture. With this additional channel, it is expected that neutron beams complying with the requirement of the IAEA can be directed more conveniently toward the patient. In this article, the results of the development of the DLBSA design using additional nozzles and their effects on improving the quality of the epithermal neutron beam will be presented.

2. Materials and methods

2.1 Design of DLBSA

The proton source modeled in the DLBSA design is 30 MeV protons generated from a 30 MeV cyclotron type accelerator developed by the KURRI institute in Japan, namely C-BENS. 30 MeV protons impinge on ^9Be target producing fast neutrons with energy ranging from 0.01 to 28 MeV and total flux of $1.9 \cdot 10^{14} \text{ n/s/mA}^{-1}$ [7]. The neutrons are subsequently processed using a DLBSA into epithermal neutrons.

DLBSA is modeled with four main components, namely moderator, reflector, collimator, and filter. Each component is formed from a combination of two materials. The moderator was chosen from a combination of aluminum and CaF_2 materials. The reflector is selected from a combination of plumbum with nickel material. The collimator is composed of nickel and carbon materials. The final stage is selecting a combination of fast neutron filters and

thermal neutrons. The combination of fast and thermal neutron filters is materialized by combining FeC with cadmium material. Besides the cadmium filter, a gamma filter made of plumbum is installed [9]. At the end of the collimator, an additional channel is added in the form of a cylindrical nozzle.

The DLBSA design with additional nozzles is intended for usage in BNCT therapies, which is more efficient in delivering radiation beams onto patients. Additional nozzles are also intended to suppress beam spread as it exits the aperture. The position of the nozzle is placed at the output end of the aperture. The shape of DLBSA without nozzles (basic DLBSA) and with added nozzles is shown in Fig. 1. The nozzle material is made in three configurations, namely Ni+LiF load polyethylene, Pb+LiF load polyethylene and Bi+LiF load polyethylene. The length of the nozzle is 20 cm with a diameter of 12 cm. The evaluation of the neutron beam is carried out at the position of the output end of the nozzle.

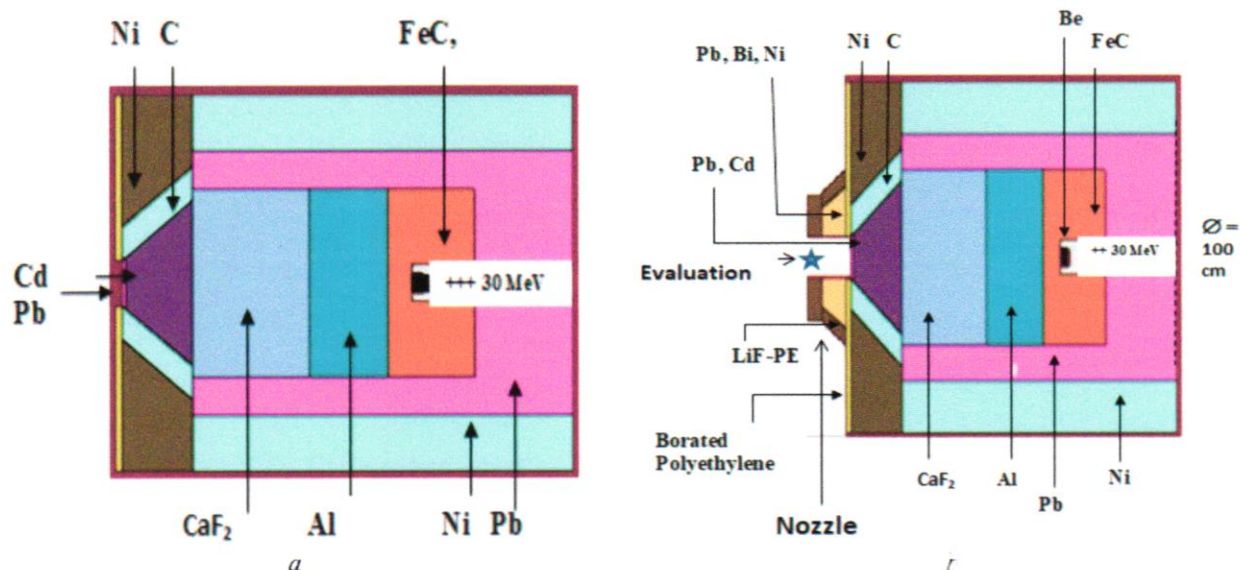


Fig. 1. DLBSA: *a* – basic DLBSA without the additional nozzle; *b* – DLBSA with nozzle extension. (See color Figure on the journal website.)

Neutron beam parameters for BNCT according to IAEA standard [11]

Parameter	Notation (unit)	IAEA recommendation
Epithermal neutron flux	ϕ_{epi} , $\text{n}/(\text{cm}^2 \cdot \text{s})$	$\geq 1,0 \cdot 10^9$
Fast neutron dose rate / Epithermal neutron flux	D_f/ϕ_{epi} , $\text{Gy} \cdot \text{cm}^2$	$< 2,0 \cdot 10^{-13}$
Gamma dose rate / Epithermal neutron flux	$D_\gamma/\phi_{\text{epi}}$, $\text{Gy} \cdot \text{cm}^2$	$< 2,0 \cdot 10^{-13}$
The ratio of epithermal and thermal neutron flux	$\phi_{\text{epi}}/\phi_{\text{th}}$	> 100

An evaluation of the characteristics of the neutron beam coming out of the nozzle was carried out using the particle heavy ion transport version 3.2. code with nuclear data JENDL-4.0 [10]. The evaluation is carried out at the output tip of the nozzle as shown in Fig. 1. The characteristics of the neutron produced at the nozzle output tip are meant to comply with IAEA standards as shown in the Table.

3. Results and discussions

3.1. The characteristics of epithermal neutron flux

The development of the DLBSA design was carried out by adding a nozzle at the output end of the aperture. The resulting epithermal neutrons can expectedly reduce the scattering of the neutron beam

and reduce the decrease in the epithermal neutron flux. The nozzle design combines metal and non-metallic materials. Metallic materials are intended to increase the reflectivity of epithermal neutrons. On the other hand, non-metals are used to absorb contaminants that accompany epithermal neutrons, such as thermal neutrons and fast neutrons.

The results of the evaluation of the spectral characteristics of the neutron emerging from the DLBSA without a nozzle are shown in Fig. 2. The spectrum of neutrons is shown in the basic

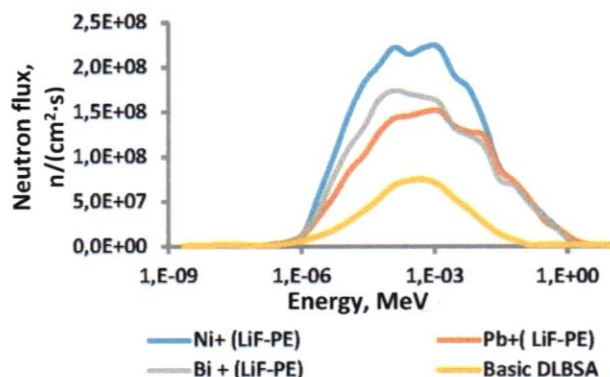


Fig. 2. The neutron flux spectrum of DLBSA output without and with nozzles.
(See color Figure on the journal website.)

The evaluation results of the epithermal neutron flux produced by DLBSA using nozzles are better than DLBSA without nozzles (basic DLBSA). The addition of nozzles with Pb+(LiF-PE), Bi+(LiF-PE), and Ni+(LiF-PE) materials can increase the epithermal neutron flux (see Fig. 2). The epithermal neutron flux produced following the addition of Pb+(LiF-PE), Bi+(LiF-PE) and Ni+(LiF-PE) nozzles is $1.55 \cdot 10^9$, $1.73 \cdot 10^9$, $2.25 \cdot 10^9$ n/(cm²·s), respectively. The epithermal neutron flux output of DLBSA with nozzles is higher than without nozzles. The epithermal neutron flux agrees with the IAEA recommendation (see Fig. 3). The addition of nozzles from Ni+(LiF-PE) produces the highest epithermal neutron flux. Nickel material can transmit the highest epithermal neutron flux compared to plumbum and bismuth materials. This is because nickel has the highest elastic scattering cross-section: $\sigma_s(\text{Ni}) = 26$ b, $\sigma_s(\text{Pb}) = 11.11$ b and $\sigma_s(\text{Bi}) = 9.156$ b [13 - 15].

3.2. Neutron flux distribution

The distribution of epithermal neutron flux in DLBSA without a nozzle and using a nozzle is shown in Figs. 4 and 5. The distribution of epithermal neutron flux in DLBSA is represented by color

spectrum of DLBSA. The neutron energy produced by DLBSA without a nozzle consists of thermal, epithermal, and fast neutrons with predominantly epithermal neutrons in the energy range 10^{-6} - 10^{-2} MeV. The total flux of epithermal neutrons before the nozzle is applied is $0.5 \cdot 10^9$ n/(cm²·s) (Fig. 3). The value of the neutron flux is included in the category of low epithermal neutron flux because it is below the IAEA standard. Low flux causes cancer treatment time to be more than 1 h [12].

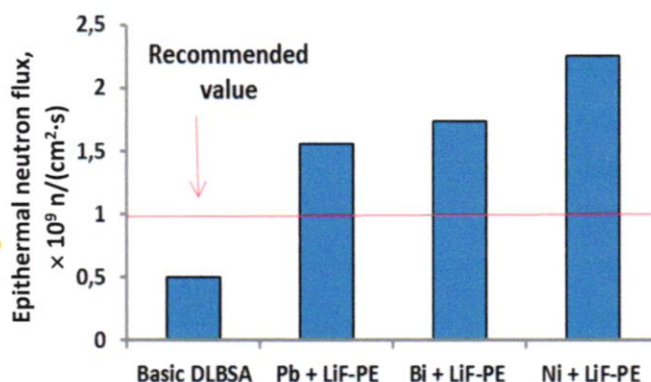


Fig. 3. The comparison of epithermal neutron flux of DLBSA output without and with nozzles.
(See color Figure on the journal website.)

intensity. Low epithermal neutron flux intensities are depicted in blue and high intensities are shown in red. The Figure shows that the epithermal neutron flux is spread out in the DLBSA. The epithermal neutron flux intensity is highest in the first filter with $z = 0$ (shown in red) and increases through the moderator, collimator, and decreases after passing through the filter with $z > -100$ (shown in yellow). The decrease in epithermal neutron flux can be attributed to the change of epithermal neutrons into thermal neutrons due to collisions with the material it passes through [16]. The neutron flux produced by DLBSA without a nozzle was measured at a 20 cm distance from the aperture is $0.5 \cdot 10^9$ n/(cm²·s). Without a nozzle, neutron flux tends to spread sideways after exiting the aperture (Fig. 4). This is due to the diffraction effect (deflection) of the neutron particles. The scattering of the epithermal neutron beam causes a decrease in the intensity of the neutron flux [17].

The distribution of epithermal neutrons in DLBSA using nozzles can channel more directed beams with greater intensity. Nickel, bismuth, and plumbum materials are very effective as reflectors on the nozzles so that (deflection in direction) of the neutron particles that spread to the side can be reduced. The use of nozzles can channel the epithermal neutron beam without a significant

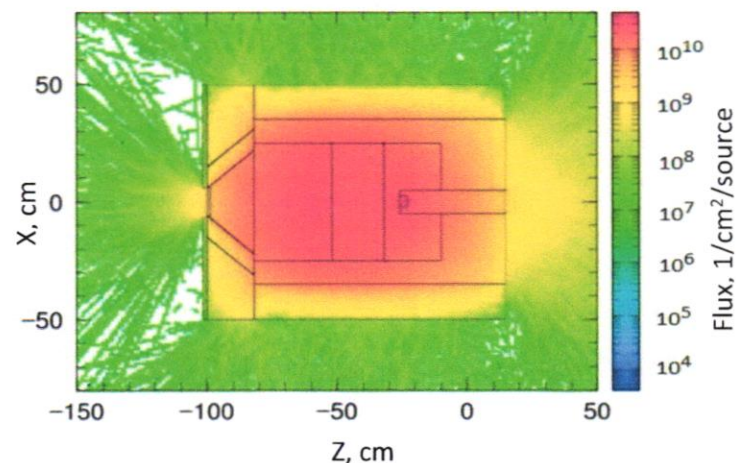


Fig. 4. Epithermal neutron distribution in basic DLBSA. X – wide of DLBSA; Z – length of DLBSA. (See color Figure on the journal website.)

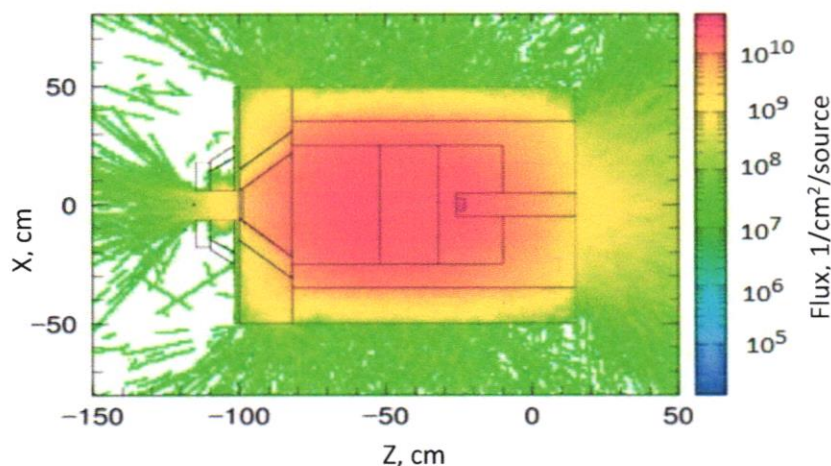


Fig. 5. Epithermal neutron distribution in DLBSA with Ni+LiF load polyethylene nozzle. X – wide of DLBSA; Z – length of DLBSA. (See color Figure on the journal website.)

decrease at a distance of 20 cm (Fig. 5). The effectiveness of the nozzle material in distributing the epithermal neutron beam is supported by the fact that the material has a high scattering cross-section and low absorption cross-section [13, 15].

3.3. Characteristics of contaminants

The neutron beam used in BNCT therapy requires low levels of contaminants that accompany epithermal neutrons. The IAEA sets the minimum standard for contaminants accompanying epithermal neutrons as follows. The ratio of epithermal neutron flux to thermal neutron $\phi_{\text{epi}}/\phi_{\text{th}} > 100$, the ratio of fast neutron dose rate to epithermal neutron flux $D_f/\phi_{\text{epi}} < 2 \cdot 10^{-13} \text{ Gy} \cdot \text{cm}^2$ and ratio of gamma dose rate to epithermal neutron flux $D_\gamma/\phi_{\text{epi}} < 2 \cdot 10^{-13} \text{ Gy} \cdot \text{cm}^2$ [11].

Using nozzles in DLBSA can improve the quality of epithermal neutrons. The ratio of the epithermal neutron flux to the thermal neutron flux before the nozzle is applied is 50. The attachment of the nozzle increases the $\phi_{\text{epi}}/\phi_{\text{th}}$ ratio. The value of $\phi_{\text{epi}}/\phi_{\text{th}}$ after

attachments of nozzles made of Pb+LiF load polyethylene, Bi+LiF load polyethylene, Ni+LiF load polyethylene are 173, 174, and 274 respectively. The addition of nozzles for the combination of bismuth and plumbum, and nickel metals with LiF load polyethylene materials can reduce the thermal neutrons that still escape the thermal filter cadmium. The decrease is caused by the lithium material, which has a high thermal neutron absorption cross-section [18]. Polyethylene material which is composed of carbon and hydrogenium elements also contributes to the decrease in thermal neutrons [19]. The value of the ratio of the epithermal neutron flux to the thermal neutron flux $\phi_{\text{epi}}/\phi_{\text{th}}$ has exceeded the IAEA criteria. The value of the ratio of the epithermal neutron flux to the thermal neutron flux is shown in Fig. 6.

Adding nozzles to DLBSA reduces contaminants caused by the presence of fast neutrons accompanying epithermal neutrons. Based on the calculation of the ratio of the fast neutron dose rate to the epithermal neutron flux, D_f/ϕ_{epi} decreased with the

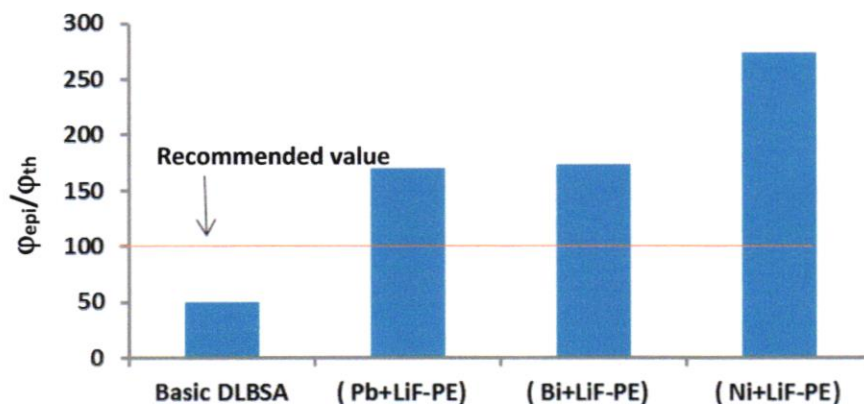


Fig. 6. The ratio of epithermal neutron flux to the thermal neutron flux.
(See color Figure on the journal website.)

attachment of the nozzle. The values of the fast neutron dose rate relative to the epithermal neutron flux using Pb+LiF load polyethylene, Bi+LiF load polyethylene, and Ni+LiF load polyethylene materials are respectively $4.35 \cdot 10^{-13}$, $1.50 \cdot 10^{-13}$ and

$0.39 \cdot 10^{-13} \text{ Gy} \cdot \text{cm}^2$. The decrease in the fast neutron dose rate is caused by fast neutrons still escaping the moderation process and will collide with the walls of the nozzle channel as a result, decreasing their energy to become epithermal neutrons [20].

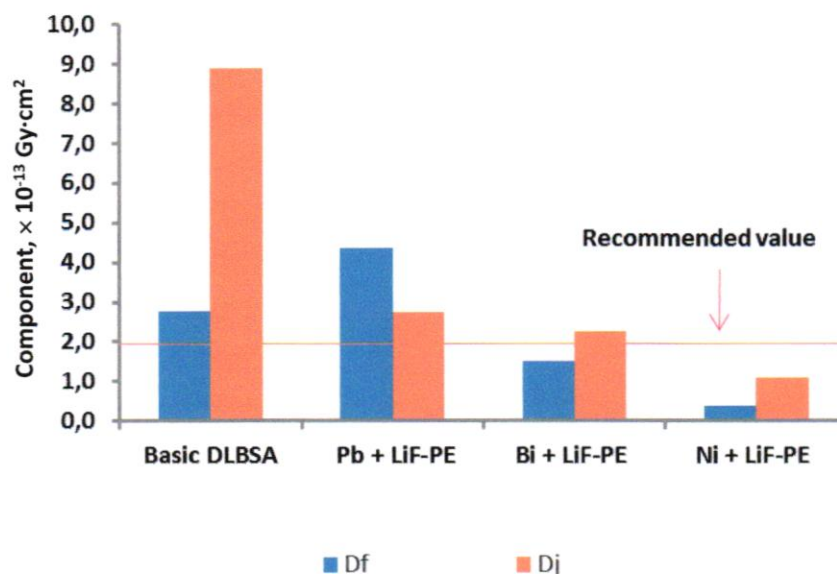


Fig. 7. The ratio of gamma dose rate (D_γ) to the epithermal neutron flux without and with nozzles.
(See color Figure on the journal website.)

The addition of nozzles on DLBSA also affects of reduction gamma contaminants. Gamma dose rate over epithermal neutron flux $D_\gamma/\varphi_{\text{epi}}$ resulting from the installation of Pb+LiF load polyethylene, Bi+LiF load polyethylene, and Ni+LiF load polyethylene materials are $2.74 \cdot 10^{-13}$, $2.26 \cdot 10^{-13}$ and $1.0 \cdot 10^{-13} \text{ Gy} \cdot \text{cm}^2$ respectively. The gamma dose rate using Pb+LiF load polyethylene and Bi+LiF load polyethylene is still above the IAEA requirement (Fig. 7). This is because when plumbum and bismuth materials interact with neutrons, a neutron capture mechanism occurs. This mechanism produces gamma emission [15]. This is the cause of such high gamma dose rate in DLBSA using nozzles made of Pb+LiF

load polyethylene and Bi+LiF load polyethylene materials. The gamma dose rate in DLBSA with nozzles made of Ni+LiF load polyethylene is the lowest because when neutrons interact with Ni material occurs elastic scattering without neutron capture [21].

4. Conclusion

A new DLBSA design has been developed with the addition of a nozzle at the end of the aperture. This addition is intended to reduce beam spread and decrease beam intensity. The result of adding a nozzle at the tip of the DLBSA is the ability to channel the beam more directionally with high

intensity. The best nozzle for producing epithermal neutron beams is DLBSA with the addition of Ni+LiF load polyethylene material. DLBSA using Ni+LiF load polyethylene nozzles produces an epithermal neutron flux of $2.25 \cdot 10^9$ n/(cm²·s), the ratio of the epithermal neutron flux to the thermal neutron flux ($\phi_{\text{epi}}/\phi_{\text{th}}$) 274, the value of the ratio of the fast neutron dose rate (D_f) and the rate of the

gamma dose (D_γ) to the epithermal neutron flux is $0.39 \cdot 10^{-13}$ and $1.0 \cdot 10^{-13}$ Gy·cm², respectively. The epithermal neutron beam meets the IAEA standards.

The author expresses his gratitude to LPPM Unsoed which has fully funded this research through the 2021 Unsoed Basic Research Grant with a Contract Number 1068/UN23/HK02/2021.

REFERENCES

1. W.A.G. Sauerwein. Principles and Roots of Neutron Capture Therapy. In: *Neutron Capture Therapy* (Berlin, Heidelberg: Springer, 2012) p. 1.
2. M.A. Hassanein et al. An optimized epithermal BNCT beam design for research reactors. *Progress in Nuclear Energy* 106 (2018) 455.
3. J.A. Kreiner et al. Present status of accelerator-based BNCT. *Reports of Practical Oncology and Radiotherapy* 21(2) (2016) 95.
4. S.Yu. Taskaev. Accelerator based epithermal neutron source. *Physics of Particles and Nuclei* 46 (2015) 956.
5. J.G. Fantidis, G. Nicolaou. Optimization of beam shaping assembly design for boron neutron capture therapy based on a transportable proton accelerator. *Alexandria Engineering Journal* 57(4) (2018) 2333.
6. Yu Lu et al. GEANT4 simulations of the neutron beam characteristics for ⁹Be/⁷Li targets bombarded by the low energy protons. *Nucl. Instrum. Methods B* 506 (2021) 8.
7. H. Tanaka et al. Experimental verification of beam characteristics for cyclotron-based epithermal neutron source (C-BENS). *Applied Radiation and Isotopes* 69(12) (2011) 1642.
8. R.L. Moss. Critical review with an optimistic outlook, on boron neutron capture therapy (BNCT). *Applied Radiation and Isotopes* 88 (2014) 2.
9. Bilalodin et al. Optimization of double layered beam shaping assembly using genetic algorithm. *Polish Journal of Medical Physics and Engineering* 24(4) (2018) 157.
10. T. Sato et al. Particle and Heavy Ion Transport code System (PHITS) version 2.52. *J. Nucl. Sci. Technol.* 50(9) (2013) 913.
11. *Current Status of Neutron Capture Therapy*. IAEA-TECDOC-1223 (Vienna: IAEA, 2001) 302 p.
12. M. Türkmen et al. A New method in beam shaping: Multi-objective genetic algorithm method coupled with a Monte-Carlo based reactor physics code. *Progress in Nuclear Energy* 99 (2017) 165.
13. M. Asnal et al. An evaluation on the design of beam shaping assembly based on the D-T reaction for BNCT. *Journal of Physics: Conference Series* 611 (2015) 012031.
14. Y. Kasesaz et al. Design of an epithermal neutron beam for BNCT in thermal column of Tehran research reactor. *Annals of Nuclear Energy* 68 (2014) 234.
15. A. dos Santos et al. Tree heavy reflector experiment in the IPEN/MB-01 reactor: stainless steel, carbon steel and nickel. *Nuclear Data Sheets* 118 (2014) 568.
16. Bilalodin et al. Optimization and analysis of neutron distribution on 30 MeV cyclotron-based Double layer Beam Shaping Assembly (DLBSA). *Nuclear Physics and Atomic Energy* 20(1) (2019) 70.
17. S.F. Masoudi, F.S. Rasouli. BNCT of skin tumors using the high-energy D-T neutrons. *Applied Radiation and Isotopes* 122 (2017) 158.
18. M. Asnal, T. Liamsuwan, T. Onjun. An evaluation on the design of beam shaping assembly based on the D-T reaction for BNCT. *Journal of Physics: Conference Series*. 611 (2015) 012031.
19. R. Ogawara et al. Polyethylene moderator optimized for increasing thermal neutron flux in the NASBEE accelerator-based neutron field. *Radiation Measurements* 137 (2020) 106358.
20. Bilalodin et al. Characteristics in Water Phantom of Epithermal Neutron Beam Produced by Double Layer Beam Shaping Assembly. *ASEAN Journal on Science and Technology for Development* 36(1) (2019) 9.
21. K. Sato. Improved design of the exit of a beam shaping assembly for an accelerator-driven BNCT system in Nagoya University. Proc. of the Int. Conf. on Neutron Optics (NOP2017). *JPS Conf. Proc.* 22 (2018) 011003.

Біلالодін^{1,*}, А. Хар'яді¹, Картіка Сарі¹, Ю. Сарджоно², Расіто Турсіна³

¹ Кафедра фізики, факультет математики та природничих наук,

Університет Джендерала Содірмана, Пурвокерто, Індонезія

² Дослідницький центр прискорювальних технологій, Національне агентство досліджень та інновацій,
Центральна Джакарта, Індонезія

³ Дослідницький центр прикладних ядерних технологій, Бандунг, Індонезія

*Відповідальний автор: bilalodin@unsoed.ac.id

**РОЗРОБКА КОНСТРУКЦІЇ ДВОШАРОВОЇ СИСТЕМИ ФОРМУВАННЯ ПУЧКА
З ВИКОРИСТАННЯМ ДОДАТКОВОЇ НАСАДКИ ДЛЯ ПІДВИЩЕННЯ ЯКОСТІ ПУЧКА
ЕПІТЕРМАЛЬНИХ НЕЙТРОНІВ ЯК ДЖЕРЕЛА НЕЙТРОНІВ
ДЛЯ БОР-НЕЙТРОН-ЗАХОПЛЮВАЛЬНОЇ ТЕРАПІЇ**

Двошарова система формування пучка (DLBSA) – це система, що перетворює швидкі нейтрони в епітермальні нейтрони. Епітермальні нейтрони, що залишають апертуру в системі DLBSA, розширюються в просторі, тим самим зменшуючи інтенсивність та однорідність пучків епітермальних нейтронів. Тому необхідно вдосконалити конструкцію. Розробка конструкції DLBSA проводилася з використанням додаткових насадок. Насадки розроблено з використанням матеріалів, виготовлених у трьох конфігураціях, а саме: поліетилен з додаванням Ni+LiF, поліетилен з Pb+LiF та поліетилен з Bi+LiF. Результати моделювання показують, що додавання насадки в DLBSA може каналізувати пучок більш спрямовано з високою інтенсивністю. Додавання насадок з поліетилену з Ni+LiF створює пучок епітермальних нейтронів, що відповідає стандартам МАГАТЕ.

Ключові слова: додаткова насадка, двошарова система формування пучка, епітермальний нейтрон, бор-нейтрон-захоплювальна терапія.

Надійшла/Received 15.09.2021

**KLARIFIKASI STATUS JURNAL INTERNASIONAL BEREPUTASI
YANG DIGUNAKAN DALAM KENAIKAN PANGKAT JABATAN GURU BESAR**

Pengusul : Bilalodin MSi

No	Nama Judul Karya Ilmiah	Jurnal	Resume Jurnal
1.	Design Development of Double-Layer Beam Shaping Assembly Using Extension Nozzle to Increase the Quality of Epithermal Neutron Beam as a BNCT neutron source Penulis: Bilalodin, A. Haryadi, Kartika Sari, Y. Sardjono, RasitoTursinah	Nuclear Physics and Atomic Energy (Q4) SJR :0,26	Artikel Ilmiah merupakan output dari penelitian Riser Dasar Unsoed tahun 2021 dan penulisan merupakan kolaborasi teman sejawat dari Badan Riset dan Inovasi Nasional (BRIN)(Pemenggang Licensi PHITS). Artikel ilmiah ditulis setelah selesai studi tahun 2020. Perbedaan antara isi disertasi dan artikel ilmiah 1. Disertasi Fokus pembahasan - Desain DLBSA menggunakan program MCNPX dan optimasi Algoritma Genetika untuk mendapatkan berkas sesuai standar IAEA. - Pengujian berkas menggunakan panthon air. Pengujian dilakukan untuk mengetahui daya tembus berkas tersebut untuk melihat jenis kanker apa saja yang cocok diterapi menggunakan sumber neutron dari DLBSA. Salah satu konfigurasi DLBSA yang berhasil dioptimasi menggunakan metode AG susunan materialnya Moderator (Al +CaF) + Reflektor (Pb+Ni), kolimator (Ni + C)) +filter (FeC-LiF+ Cd) 2. Artikel ilmiah menekankan pembahasan pada desain DLBSA dengan penambahan nozel pada ujung DLBSA tersebut dengan tujuan untuk mengurangi penyebaran (divergensi) berkas neutron dan meningkatkan kualitas berkas neutron epitermal. Secara detail fokus pembahasan - Desain DLBSA ditambahkan nozel pada ujung DLBSA. - Pemilihan bahan yang cocok untuk nozel - Pengujian kemampuan saluran nozel terhadap pengurangan divergensi berkas neutron.

			d. Optimasi konfigurasi nozel untuk mendapatkan peningkatan berkas neutron. e. Konfigurasi DLBSA + nozel susunan materialnya Moderator (Al +CaF) + Reflektor (Pb+Ni), kolimator (Ni + C)) +filter (Pb+ Cd), filter I Borated- PE + nozel ((Pb, Bi, Ni) + LiF-PE). f. Data yang digunakan tidak ada yang tercantum pada disertasi. Persamaan. Konfigurasi yang digunakan adalah <i>double layer</i> masing masing komponen BSA menggunakan dua lapisan material. Kesimpulan: Kebaruan >75% Dasar pedoman penilaian angka kredit a. Berdasarkan Pedoman operasional penilaian angka kredittahun 2019 hal. 35 menyebutkan bahwa : artikel yang dipublikasikan/ diterbitkan di jurnal nasional terakreditasi, jurnal internasional selama pendidikan sekolah(tugas/izin belajar S2 dan atau S3) yang merupakan sintesis /pengembangan dari disertasi dapat digunakan untuk kenaikan jabatan setelah selesai pendidikan, bukan untuk syarat khusus, dapat dipakai bila terdapat keterbaruan minimal 75% dari disertasinya. b. Semua pemenuhan karya ilmiah syarat khusus untuk pengusulan ke jabatan akademik adalah karya ilmiah yang diterbitkan setelah lulus studi (kecuali untuk kelompok pengangkatan pertama kalinya).
--	--	--	---

2	Nama Judul Karya Ilmiah	Jurnal	Resume Jurnal
	Analysis Of Particle Distribution In a Double Layer Beam Shaping Assembly Resulted From 30 MEV-Proton Reactions With Beryllium Target Using The PHITS Program. Penulis: Bilalodin, Gede Bayu Suparta, Arief Hermanto, Dwi Satya Palupi, Yohannes Sardjono, Rasito	Journal Teknologi (Science & engineering); Terindeks : SCOPUS (Q3) dengan SJR (2020) 0,191;	1. Artikel Ilmiah ditulis pada saat studi dan disempurnakan setelah studi . Artikel ditulis bersama pembimbing dan kolaborasi teman sejawat dari Badan Riset dan Inovasi Nasional (BRIN). Artikel terbit 23 April 2020. Dinyatakan lulus Studi 27 Pebruari 2020. Perbedaan isi disertasi dan Artikel Ilmiah Pembahasan artikel ilmiah - Penulisan artikel dilatarbelakangi adanya permasalahan bahwa desain DLBSA Program MCNPX tidak mampu memvisualisasikan secara lengkap interaksi partikel dengan materi. - Desain menggunakan program PHITS. - Dibahas secara mendalam visualisasi distribusi partikel proton, neutron cepat, neutron epitermal, neutron termal dan sinar gamma. Serta jenis distribusi neutron yang dihasilkan pada ujung DLBSA. Konfigurasi DLBSA mempunyai susunan material: Moderator (Al +LiF) + Reflektor (Pb+FeC), kolimator (Ni + Borated polyetilen) +filter (FeC+ Cd). Pembahasan disertasi - Desain DLBSA dilatarbelakangi usaha mendapatkan desain DLBSA yang menghasilkan fluks neutron sesuai standar IAEA. Desain DLBSA menggunakan program MCNPX dan optimasinya menggunakan metode bertahap dan Algoritma Genetika. Program PHITS untuk verifikasi DLBSA generasi ke 30. Optimasi bertahap menghasilkan Konfigurasi DLBSA susunan materialnya Moderator Al +BiF3 + Reflektor (Pb+C), kolimator (Ni + Borated polyetilen) +filter (Fe+ Cd) Optimasi AG menghasilkan 8 konfigurasi yang tidak sama dengan jurnal/artikel. Persamaan Konsep konfigurasi <i>double layer</i> yaitu masing-masing komponen BSA menggunakan dua lapisan material. Kesimpulan Kebaruan > 75 %.

			Dasar pedoman penilaian angka kredit Berdasarkan Pedoman operasional penilaian angka kredit tahun 2019 hal. 35 menyebutkan bahwa : artikel yang dipublikasikan/ diterbitkan di jurnal nasional terakreditasi, jurnal internasional selama pendidikan sekolah (tugas/izin belajar S2 dan atau S3) yang merupakan sintesis /pengembangan dari disertasi dapat digunakan untuk kenaikan jabatan setelah selesai pendidikan, bukan untuk syarat khusus, dapat dipakai bila terdapat keterbaruan minimal 75% dari disertasinya. b. Semua pemenuhan karya ilmiah syarat khusus untuk pengusulan ke jabatan akademik adalah karya ilmiah yang diterbitkan setelah lulus studi (kecuali untuk kelompok pengangkatan pertama kalinya).
--	--	--	---

3	Nama Judul Karya Ilmiah	Jurnal	Resume Jurnal
	Optimization and Verification of Double Layer Beam Shaping Assembly (DLBSA) for Epithermal Neutron Generation. Penulis: Bilalodin, Aris Haryadi, Kartika Sari, Wihantoro	Journal Teknologi (Science & engineering) ;ISSN : 2180-3722; Edisi: Vol. 84 No. 4: July 2022 Hal: 103-112 Terindeks : SCOPUS (Q3) dengan SJR (2021) 0.203;	Artikel Ilmiah merupakan output dari penelitian Riser Dasar Unsoed tahun 2021. Dilaksanakan setelah lulus Sudi 2020. Perbedaan isi artikel ilmiah dan disertasi Pembahasan artikel ilmiah - Perbaikan desain ulang DLBSA menggunakan program MCNPX dan optimasinya menggunakan metode AG sampai generasi 21 . - Penentuan generasi terbaik dilakukan dengan cara menentukan parameter ke 1,2, 3,4 dan 5 yang berbeda. Sampling diambil generasi awal (ke 0), generasi menengah ke 10, dan generasi akhir (ke 21). Sehingga lebih cepat dalam menentukan generasi terbaik.(hal. 108-109) - Hasil optimasi generasi ke 21 dilakukan verifikasi menggunakan program PHITS. - Dilakukan analisis hasil desain yang diperoleh menggunakan MCNPX dan PHITS. Pembahasan pada disertasi - Desain menggunakan program MCNPX dan optimasi menggunakan metode AG sampai generasi ke 21. - Penentuan generasi terbaik dengan cara membandingkan satu persatu dari nilai 5 parameter IAEA. (hal 83-85). - Tidak dilakukan verifikasi pada generasi ke 21 - Tidak dilakukan analisa hasil perbandingan dua metode. Kesimpulan: kebaruan > 75% Persamaan Desain DLBSA sama sama menggunakan program MCNPX dan optimasinya menggunakan AG sampai generasi 21. Dasar pedoman penilaian angka kredit - Berdasarkan Pedoman operasional penilaian angka kredittahun 2019 hal. 35 menyebutkan bahwa : artikel yang dipublikasikan/ diterbitkan di jurnal nasional

			terakreditasi, jurnal internasional selama pendidikan sekolah(tugas/izin belajar S2 dan atau S3) yang merupakan sintesis /pengembangan dari disertasi dapat digunakan untuk kenaikan jabatan setelah selesai pendidikan, bukan untuk syarat khusus, dapat dipakai bila terdapat keterbaruan minimal 75% dari disertasinya. b. Semua pemenuhan karya ilmiah syarat khusus untuk pengusulan ke jabatan akademik adalah karya ilmiah yang diterbitkan setelah lulus studi (kecuali untuk kelompok pengangkatan pertama kalinya).
--	--	--	---