



COLLABORATE WITH



USER

Username

Password

☐ Remember me

Login

JOURNAL CONTENT

Search

Search Scope

Search

Browse

- ▶ By Issue
- ▶ By Author
- ▶ By Title
- ▶ Other Journals

INFORMATION

- ▶ For Readers
- ▶ For Authors
- ▶ For Librarians

NOTIFICATIONS

- ▶ View
- ▶ Subscribe

RECOMENDED TOOLS



Home > About the Journal > **Editorial Team**

Editorial Team

Editor in Chief

Antomi Saregar, (Scopus ID: 57201321267, Subject area: Physics Education) Universitas Islam Negeri Raden Intan Lampung, Indonesia

Advisory Editorial Board

Konstantinos Ravanis, (Scopus ID: 8710602700, Subject area: Physics Education, Science Education) University of Patras, Greece

Jean Marie Boilevin, (Scopus ID: 24470928200, Subject area: Physics Education), Centre de Recherche sur l'Éducation, les Apprentissages et la Didactique - CREAD, Université de Bretagne Occidentale., France

Korhan Cengiz, Ph. D., SMIEEE, (Scopus ID: 56522820200, Subject area: Computer Science, Energy, Engineering, Material Science, Physics, Multidisciplinary) Trakya University, Turkey

Adel Kotb, (Scopus ID: 55614316800, Subject area: Physics, Hydro-geophysics, Near Surface Geophysics, Applied Geophysics) Helwan University, Cairo, Egypt

Mitra Djamal, (Scopus ID: 6506355194, Subject area: Applied Physics) Institut Teknologi Sumatera and Chief of Physics Society of Indonesia, Indonesia

Andrew Heckler, (Scopus ID: 6602388258, Subject area: Physics Education) Ohio State University, Department of Physics, Columbus, United States

Warsito Warsito, (Scopus ID: 37079631800, Subject area: Physics and Astronomy; Materials Science; Earth and Planetary Sciences) Universitas Lampung, Indonesia

Cari Cari, (Scopus ID: 33267518100, Subject area: Physics Education) Universitas Negeri Sebelas Maret, Indonesia, Indonesia

Anto Sulaksono, (Scopus ID: 6507369203 Subject area: Physics and Astronomy) Universitas Indonesia, Indonesia

Co- Editor in Chief

Happy Komikesari, (Scopus ID: 57208305928, Subject area: Physics Education) Universitas Islam Negeri Raden Intan Lampung, Indonesia

Editorial Board

Abdurrahman Abdurrahman, (Scopus ID: 57006623600, Subject area: Physics Education) Universitas Lampung, Indonesia

Rofiqul Umam, (Scopus ID: 57201308953) Faculty of Science and Technology, Kwansei Gakuin University, Japan

Ali Rahmat, (Scopus ID: 57189066685; Applied Physics for renewable energy) Lembaga Ilmu Pengetahuan Indonesia [The Indonesian Institute of Sciences], Indonesia

Ishwar Shrawan Mohurley, (Solid State Physics and Relativity) Shri Dnyanesh Mahavidyalaya Nawargaon, India

Achmad Samsudin, (Scopus ID: 57191537500, Subject area: Physics Education) Universitas Pendidikan Indonesia, Indonesia

Vishal R Panse, Ph. D., Late.B.S.Arts, Prof.N.G.Science & A.G.Commerce College, Sakharherda, India

Hartono Bancong, (Scopus ID: 57200101660, Subject area: Physics Education), Universitas Muhammadiyah Makassar, Indonesia

Muhammad Nur Hudha, Universitas Kanjuruhan Malang, Indonesia

Dwi Yulianti, (Scopus ID: 57194041989) Universitas Negeri Semarang, Indonesia

Sri Latifah, (Scopus ID: 57206516745) Universitas Islam Negeri Raden Intan Lampung, Indonesia

Rahma Diani, (Scopus ID: 57205348300) Universitas Islam Negeri Raden Intan Lampung, Indonesia

Administrator

Nur Endah Susilowati, (Scopus ID: 57208302422, Subject area: Physics Education) Universitas Islam Negeri Raden Intan Lampung, Indonesia



Jurnal ilmiah pendidikan fisika Al-Biruni is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](https://creativecommons.org/licenses/by-sa/4.0/). Copyright © Physics Education Department, Universitas Islam Negeri Raden Intan Lampung. e-ISSN 2503-023X

People

Editorial Team

Reviewer

Contact

Policies

Journal History

Focus and Scope

Peer Review Process

Publication Frequency

Open Access Policy

Digital Preservation

Deposit Policy

Publication Ethics and Misconduct

Screening for Plagiarism

Withdrawal of Manuscript

Correction and Retraction

Indexing and Abstracting

Article Processing Charge

Submissions

Author Guidelines

Copyright Notice

Privacy Statement

Information

For Readers

For Authors

For Librarians

00532994 Al-Biruni Stats

Certificate of Accreditation



Flag Counter

Visitors

ID 184,478	HK 142
US 12,793	NG 134
MY 1,359	KR 123
IN 922	TW 114
PH 617	PK 98
TR 515	EG 89
JP 504	IR 77
SG 449	ES 75
TH 378	IT 62
GR 369	VN 61
CA 354	RU 60

GB

306

CA

275

AU

204

FR

203

NL

179

ZA

172

RU

171

DE

152

BR

152

MX

00

SA

58

TG

55

ET

50

IE

48

GH

40

HU

40

CO

38

FI

36

IQ

31

Pageviews: 563,779

Flags Collected: 146



We are

Crossref

Member

ISSN BARCODE



e_ISSN (online)



p_ISSN (print)



AUTHOR'S COUNTRIES

- ☐ Bangladesh (1)
- ☐ Indonesia (30)
- ☐ India (1)
- ☐ Iran (1)
- ☐ Japan (3)
- ☐ Malaysia (1)



COLLABORATE WITH



USER

Username

Password

☐ Remember me

Login

JOURNAL CONTENT

Search

Search Scope

Search


Browse

- By Issue
- By Author
- By Title
- Other Journals

INFORMATION

- For Readers
- For Authors
- For Librarians

CURRENT ISSUE



NOTIFICATIONS

Home > Archives > Vol 11, No 1 (2022)

Vol 11, No 1 (2022)

Jurnal Ilmiah Pendidikan Fisika Al-Biruni

Table of Contents

- The performances of undershot waterwheel with butterfly-shaped blades and the radius of grasshopper's elbow: The utilization efforts for river electrical energy potential** 1-17
Suhartono Suhartono, Rahmat Rudianto, Sri Fatmawati, Saiful Aziz
DOI: 10.24042/jipf.al-biruni.v11i1.10060 | Abstract views : 243
- Exploration of physics concepts with traditional engklek (hopscotch) game: Is it potential in physics ethno-STEM learning?** 19-33
Iqbal Ainur Rizki, Nadi Suprpto, Setyo Admoko
DOI: 10.24042/jipf.al-biruni.v11i1.10900 | Abstract views : 198
- STEM education through PhET simulations: An effort to enhance students' critical thinking skills** 35-45
Khaeruddin Khaeruddin, Hartono Bancong
DOI: 10.24042/jipf.al-biruni.v11i1.10998 | Abstract views : 162
- Multi-representation-based interactive physics electronic module as teaching materials in online learning** 47-55
Irma Rahmawati, Nada Nisrina, M Rezalul Abdani
DOI: 10.24042/jipf.al-biruni.v11i1.10544 | Abstract views : 180
- Understanding gait characteristics of Japanese elderly men through joint angle and angular velocity parameters** 57-68
Irma Nur Afiah, Hiroki Nakashima, Ping Yeap Loh, Satoshi Muraki
DOI: 10.24042/jipf.al-biruni.v11i1.11458 | Abstract views : 90
- Patella radiograph image texture: The correlation with lumbar spine bone mineral density values** 69-75
Agus Mulyono, Md. Monirul Islam, Vishal R Panse
DOI: 10.24042/jipf.al-biruni.v11i1.11348 | Abstract views : 45
- The iSpring learning media integrated with the KWL learning model: Impact on Students' self-directed learning in momentum and impulse** 77-89
Nadya Damayanti, Mundilarto Mundilarto
DOI: 10.24042/jipf.al-biruni.v11i1.11363 | Abstract views : 40
- Ethnopedagogy: Traditional games in senior high school physics enrichment module** 91-101
Yuberti Yuberti, Happy Komikesari, Ardian Asyhari, Iis Nanda Octana
DOI: 10.24042/jipf.al-biruni.v11i1.8541 | Abstract views : 54
- Investigation on electron contamination of LINAC at different operating voltages using particle heavy ion transport code system (PHITS)** 103-111
Bilalodin Bilalodin, Aris Haryadi, Yohannes Sardjono, Yaser Kasesaz
DOI: 10.24042/jipf.al-biruni.v11i1.11929 | Abstract views : 43
- Gender analysis in measurement materials: Critical thinking ability and science processing skills** 113-128
Darmaji Darmaji, Astalini Astalini, Dwi Agus Kurniawan, Endah Febri Setiya Rini
DOI: 10.24042/jipf.al-biruni.v11i1.11509 | Abstract views : 13
- Morphological characteristics and electrical properties analysis of silica based on river and coastal iron sand** 129-140
Lalu Ahmad Didik Meiliyadi, Muh. Wahyudi, Isniwana Damayanti, Ahmad Fudholi
DOI: 10.24042/jipf.al-biruni.v11i1.12390 | Abstract views : 72



Jurnal ilmiah pendidikan fisika Al-Biruni is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License. Copyright © Physics Education Department, Universitas Islam Negeri Raden Intan Lampung. e-ISSN 2503-023X

People

Editorial Team

Reviewer

Contact

Policies

Journal History

Focus and Scope

Peer Review Process

Publication Frequency

Open Access Policy

Digital Preservation

Deposit Policy

Publication Ethics and Misconduct

Screening for Plagiarism

Withdrawal of Manuscript

Correction and Retraction

Indexing and Abstracting

Article Processing Charge

Submissions

Author Guidelines

Copyright Notice

Privacy Statement

Information

For Readers

For Authors

For Librarians

00538497 Al-Biruni Stats

Certificate of Accreditation



Flag Counter

Visitors

ID 186,724	HK 142
US 12,903	NG 134
MY 1,367	KR 127
IN 935	TW 119
PH 623	PK 98
TR 519	EG 91
JP 513	IR 78
SG 450	ES 76
TH 386	MX 69
GR 372	VN 63
RU 365	IT 62

ISSN 2503-023X

- ▶ View
- ▶ Subscribe

RECOMENDED TOOLS



GB 310	IT 63
CA 279	SA 58
AU 217	TL 57
FR 205	ET 50
NL 179	IE 48
ZA 176	CO 40
RU 175	GH 40
BR 153	HU 40
DE 152	FI 36
	IQ 31

Pageviews: 569,387
Flags Collected: 146



We are
Crossref

Member

ISSN BARCODE



9 772503 023008
e_ISSN (online)



9 772303 183001
p_ISSN (print)





JURNAL ILMIAH PENDIDIKAN FISIKA AL-BIRUNI

[FACULTY TEACHER AND TRAINING, UNIVERSITAS ISLAM NEGERI RADEN INTAN LAMPUNG](#)
★ [P-ISSN : 23031832](#) < > [E-ISSN : 2503023X](#) ♦ [Subject Area : Science, Education, Engineering](#)



2.75926

Impact Factor



3995

Google Citations



S2

Current Accreditation

♦ [Google Scholar](#) ♦ [Garuda](#) 🌐 [Website](#) 🌐 [Editor URL](#)

History Accreditation

2018 2019 2020 2021 2022 2023 2024

[Garuda](#) [Google Scholar](#)

[STEM education through PhET simulations: An effort to enhance studentsâ critical thinking skills](#)
[Universitas Islam Negeri Raden Intan Lampung, Indonesia](#) [Jurnal Ilmiah Pendidikan Fisika Al-Biruni Vol 11, No 1 \(2022\): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 35-45](#)
📅 2022 📄 [DOI: 10.24042/jipf-al-biruni.v11i1.10998](#) 🏷️ [S2 Journal](#)

[The performances of undershot waterwheel with butterfly-shaped blades and the radius of grasshopper's elbow: The utilization efforts for river electrical energy potential](#)
[Universitas Islam Negeri Raden Intan Lampung, Indonesia](#) [Jurnal Ilmiah Pendidikan Fisika Al-Biruni Vol 11, No 1 \(2022\): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 1-17](#)
📅 2022 📄 [DOI: 10.24042/jipf-al-biruni.v11i1.10060](#) 🏷️ [S2 Journal](#)

[Multi-representation-based interactive physics electronic module as teaching materials in online learning](#)
[Universitas Islam Negeri Raden Intan Lampung, Indonesia](#) [Jurnal Ilmiah Pendidikan Fisika Al-Biruni Vol 11, No 1 \(2022\): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 47-55](#)
📅 2022 📄 [DOI: 10.24042/jipf-al-biruni.v11i1.10544](#) 🏷️ [S2 Journal](#)

[Understanding gait characteristics of Japanese elderly men through joint angle and angular velocity parameters](#)
[Universitas Islam Negeri Raden Intan Lampung, Indonesia](#) [Jurnal Ilmiah Pendidikan Fisika Al-Biruni Vol 11, No 1 \(2022\): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 57-68](#)
📅 2022 📄 [DOI: 10.24042/jipf-al-biruni.v11i1.11458](#) 🏷️ [S2 Journal](#)

[Exploration of physics concepts with traditional engklek \(hopscotch\) game: Is it potential in physics ethno-STEM learning?](#)

Universitas Islam Negeri Raden Intan Lampung, Indonesia

Jurnal Ilmiah Pendidikan Fisika

Al-Biruni Vol 11, No 1 (2022): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 19-33

2022

DOI: 10.24042/jipf al-biruni.v11i1.10900

S2 Journal

Improvement of Critical Thinking Ability and Preparedness Assisted by Android-Based Media to Understand Landslide through Physics Learning

Universitas Islam Negeri Raden Intan Lampung, Indonesia

Jurnal Ilmiah Pendidikan Fisika

Al-Biruni Vol 10, No 1 (2021): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 101-109

2021

DOI: 10.24042/jipfalbiruni.v10i1.8221

S2 Journal

Does TPACK Mastery Affect Teamwork Skills? A Causal-Comparative Study of Pre-Service Physics Teachers

Universitas Islam Negeri Raden Intan Lampung, Indonesia

Jurnal Ilmiah Pendidikan Fisika

Al-Biruni Vol 10, No 1 (2021): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 37-46

2021

DOI: 10.24042/jipfalbiruni.v10i1.8327

S2 Journal

How to Stimulate Student's Critical Thinking Skill on Learning Electrical Conversion Energy?

Universitas Islam Negeri Raden Intan Lampung, Indonesia

Jurnal Ilmiah Pendidikan Fisika

Al-Biruni Vol 10, No 1 (2021): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 111-118

2021

DOI: 10.24042/jipfalbiruni.v10i1.7197

S2 Journal

Brain-Based Learning: The Impact on Studentâs Higher Order Thinking Skills and Motivation

Universitas Islam Negeri Raden Intan Lampung, Indonesia

Jurnal Ilmiah Pendidikan Fisika

Al-Biruni Vol 10, No 1 (2021): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 47-58

2021

DOI: 10.24042/jipfalbiruni.v10i1.6908

S2 Journal

An Analysis of Data Acquisition System of Temperature, Oxygen, and Carbon Dioxide in Refrigerator with Arduino Mega 2560

Universitas Islam Negeri Raden Intan Lampung, Indonesia

Jurnal Ilmiah Pendidikan Fisika

Al-Biruni Vol 10, No 1 (2021): Jurnal Ilmiah Pendidikan Fisika Al-Biruni 119-127

2021

DOI: 10.24042/jipfalbiruni.v10i1.7452

S2 Journal

View more ...

Investigation on electron contamination of LINAC at different operating voltages using particle heavy ion transport code system (PHITS)

Bilalodin^{1*}, Aris Haryadi², Yohannes Sardjono³, Yaser Kasesaz⁴

^{1,2}Department of Physics, Jenderal Soedirman University, Central Java, Indonesia

³Research Center for Accelerator Technology, National Research, and Innovation Agency, Indonesia

⁴Nuclear Science and Technology Research Institute, Teheran, Iran

*Corresponding Address: bilalodin@unsoed.ac.id

Article Info

Article history:

Received: February 5, 2022

Accepted: April 25, 2022

Published: April 29, 2022

Keywords:

Dose;
 LINAC;
 PHITS;
 Secondary electron.

ABSTRACT

Research has been carried out to investigate the occurrence of secondary electron contamination in a linear accelerator (LINAC) machine. The research was conducted in a simulation using a Monte Carlo-based simulator, namely Particle and Heavy Ions Transport code System (PHITS). The simulation of the occurrence of secondary electron contamination was carried out based on the model of the LINAC Electa head that is operated at voltages of 6, 8, 10, 15, 18, and 25 MV, using a field area of 10 X 10 cm and SSD 100 cm. The simulation results show that electron contamination occurs due to the interaction of X-ray photons with the components of the LINAC head, namely the primary collimator, flattening filter, and secondary collimator. The secondary electron contaminants generated by the LINAC head components spread through the water phantom. The higher the operating voltage, the higher the secondary electron flux produced. The secondary electron contamination dose calculated in the water phantom shows that the higher the LINAC voltage, the higher is the dose received in the phantom.

©2022 Physics Education Department, UIN Raden Intan Lampung, Indonesia.

INTRODUCTION

Megavolt X-rays are high-energy X-rays. The X-ray beam can be generated by a medical Linear Accelerator (LINAC) machine through the interaction of accelerated electrons with a target (Anderson et al., 2015). The targets that are used to produce high-energy x-rays are those with high atomic numbers (high Z) such as tungsten, gold, silver, and tantalum (Vichi et al., 2020; Yeh et al., 2017). The resulting megavolt x-ray beam can be focused, directed, and uniformed using filters and collimators placed after the target (Anam et al., 2020).

However, the interaction of high energy x-rays with filters and collimators creates contaminants in the form of secondary

electrons (Mesbahi, 2009). Additionally, electron contaminants are also contributed by the interaction of electrons with the target, although in a low percentage (Seif & Bayatiani, 2015; Vichi et al., 2020).

The presence of secondary electron contaminants during treatment using LINAC may damage superficial skin tissue (dermis) to the deepest skin (hypodermis) (Butson, 1998; Mazzeo et al., 2014). Increasing the dose of secondary electron contaminants on the skin can cause an erythema (Lye et al., 2010; Yadav et al., 2010), which is the appearance of reddish patches on the skin caused by dilation of blood vessels under the skin, and desquamation, namely exfoliation of the skin from the body. The most severe impact is the occurrence of

How to cite

Bilalodin, B., Haryadi, A., Sardjono, Y., & Kasesaz, Y. (2022). Investigation on electron contamination of LINAC at different operating voltages using particle heavy ion transport code system (PHITS). *Jurnal ilmiah pendidikan fisika Al-Biruni*, 11(1), 103-111.

superficial lesions, which is abnormal skin tissues that can cause cancer or tumors (Jagtap et al., 2016; Smit & du Plessis, 2015; Yani et al., 2016).

Several studies have been carried out to understand the occurrence of secondary electron contaminants. Among them is the work of Petti et al. (1983) which revealed the presence of secondary electrons in accelerator equipment. Gonzalez et al. (2017) evaluated the emergence of secondary electrons in metallic materials. The latest research was conducted by Chegeni et al. (2021), which tried to find out what parameters affect the emergence of secondary electrons in LINAC.

Several techniques were used to calculate secondary electron contaminants, including direct measurements using electron filter plates and magnetic sweepers, spectrometry, and dosimetry methods (Chegeni et al., 2021; Han et al., 2020). Another technique used is the Monte Carlo analysis and simulation method. Sadrollahi et al. (2019) using a Monte Carlo-based program, were able to determine the secondary electron energy of 0.1 MeV using a model of the Simen Premus LINAC machine. Anam et al. (2020) using the Monte Carlo BEAMnrc-based program, were able to reveal the emergence of electron contaminants and the intensity of each component on the LINAC machine.

Although several studies have been carried out to reveal the occurrence of secondary electrons, there are still few studies that reveal the occurrence of secondary electron contaminants, displaying traces of secondary electron contaminants ranging from the target to the LINAC components and phantom. This visualization is very helpful in understanding where the secondary electron contaminants actually come from. As such, efforts to reduce contaminants so as not to have a negative impact on tissue damage can be carried out adequately. Several attempts have been made to reduce the occurrence of secondary electron contaminants, including installing

magnetic deflectors, replacing part of the air column between the patient and the head of the radiotherapy system with helium gas, and limiting treatment time (Chegeni et al., 2021).

Visualization of traces of electron contaminants can be displayed using the Particle and Heavy Ions Transport code System (PHITS). The advantage of the PHITS code or PHITS program is that it is a Monte Carlo-based program, equipped with a tally that can display a visualization of trace particles in 2 and 3 dimensions and calculate the physical quantity to be determined. The PHITS program is also suitable for simulating the transport of charged and uncharged particles that move randomly (Hashimoto et al., 2015). The PHITS program has been tested and become the basis for developing designs of medical devices in Japan (Furuta & Sato, 2021).

The use of the PHITS program to visualize the occurrence of secondary electron contamination and the calculation of the dose generated from the LINAC machine at various voltage variations have never been done. Hence, the study is a novelty of this research.

Furthermore, the purpose of the study is to visually consider the occurrence of secondary electrons in the components of the LINAC machine and calculate the dose of secondary electrons in the water phantom using the PHITS code.

METHOD

Modeling of LINAC Device

The simulation of the LINAC device model is based on the head of the LINAC Electra model which is operated at voltages of 6, 8, 10, 15, 18, and 25 MV. The selection of voltage is based on the operating voltage of the LINAC machine usually used in the hospital. The output field area of the radiation field is set for a field area of 10×10 cm and a Source to Image Receptor Distance (SID) of 100 cm. At a distance of 100 cm is placed a water

phantom with a cube geometry measuring $40 \times 40 \times 40 \text{ cm}^3$ (Hasan et al., 2019).

The model of the LINAC head consists of a number of main components, namely electron source, target, primary collimator, flattening filter, and secondary collimator. The components of the LINAC device head were simulated using the Particle and Heavy Ions Transport code System (PHITS) version 3.2 program (Sato et al., 2015). The model of the components of the LINAC head and water phantom shown in Figure 1.

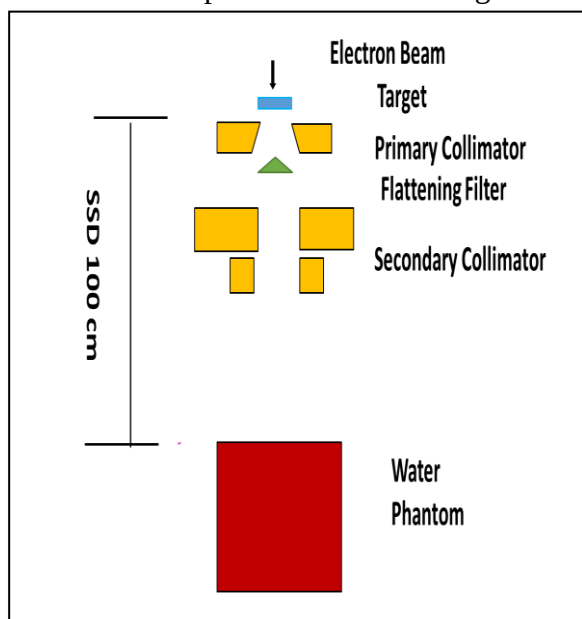


Figure 1. Configuration of LINAC head components and water phantom for investigation of electron contaminant.

The materials for the LINAC head component refer to the Electra linac model. The main components are made of metal and a mixture of several metals. The complete material data is shown in Table 1.

Table 1. Data of LINAC-head material (Abou-taleb et al., 2018)

Components of LINAC head	Material
Target	Gold (Au)
Primary collimator	Tungsten(W), Nickel (Ni), Iron (Fe)
Flattening filter	Copper (Cu)
Secondary collimator	Tungsten(W), Nickel (Ni), Iron (Fe)

Simulation of Secondary Electron Contamination

Inspection on secondary electron contaminants is carried out starting from the target to the water phantom. The spectrum and distribution of the electron particle traces were observed using a tally track. Meanwhile, the absorbed dose uses a tally deposit. The simulation LINAC machine was carried out with primary electron particles numbering to 10^9 . The ANGEL software is used to display particle traces and geometry visualization. The cross-sectional data library used for electrons and photons is JENDL-4.0 (Sato et al., 2015). These data will expectedly guarantee the validity of the model designed.

RESULTS AND DISCUSSION

Validity of model

Model validation is intended to ensure that the model matches the actual X-ray equipment. The matching criteria include the equipment producing X-ray beams and the Percentage Depth Dose (PDD) curve must match the measurement results (Ezzati et al., 2020).

The simulation results show that the LINAC machine has produced X-ray beams, which is indicated by the presence of X-ray particle traces starting from the target through the collimator and up to the water phantom. Traces of high-intensity X-ray particles are shown in red and low-intensity particles are shown in blue. High-intensity X-rays are generated near the target and the lowest in the area obstructed by the components of the LINAC head. This high intensity of X-rays around the target is caused by the mechanism for the generation of X-rays between accelerated electrons and the target (Anam et al., 2020). The image of the simulation result of the X-ray particle traces from the LINAC head is shown in Figure 2a.

The model of LINAC machine has also matched the actual equipment. This is demonstrated by the correspondence of the PDD curve values generated by the

simulation with the measurement results (Figure 2b). The PDD curve has a low surface dose pattern then rises to a maximum value and decreases exponentially. Such a low dose on the surface of the water phantom is caused by the X-ray being attenuated. As the interaction of x-rays with water phantom increases in depth, ionization processes through the mechanism of the photoelectric effect, the Compton effect, and the production of pairs increase, resulting an increase in the dose and reaches the maximum value in the buildup area. The dose then decreases as the X-rays decrease in energy and flux or intensity (AL-Naqqash et al., 2018; Efendi et al., 2017).

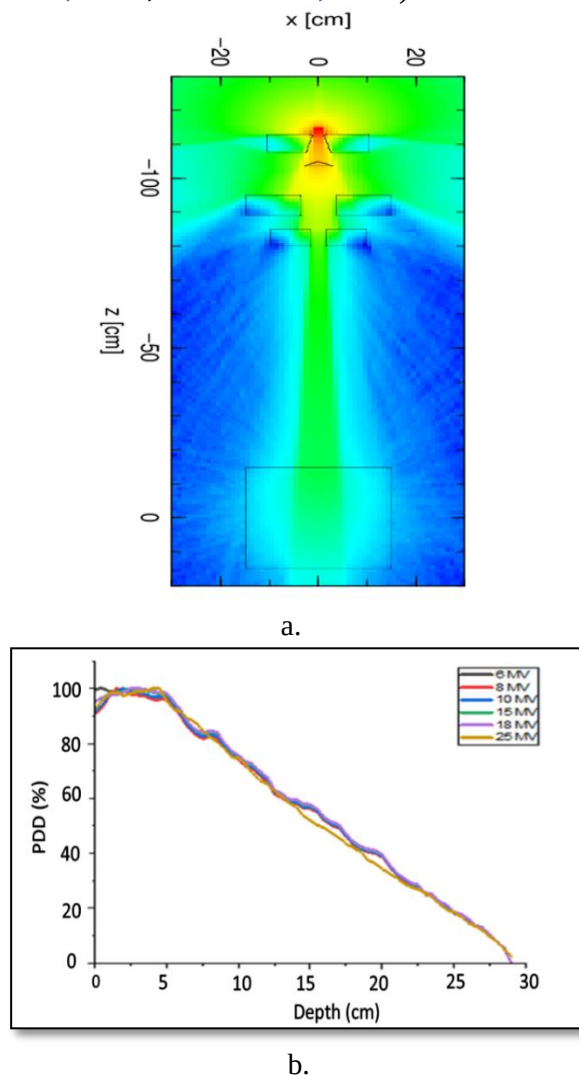


Figure 2. a. The simulation results of X-ray particle traces at a LINAC voltage of 8 MV. b. PDD Graph of X-Ray energy simulation results at 6,8 10, 15, 18 and 25 MV

The results of the calculation of the maximum dose build-up value on a LINAC machine operating at 6, 8, 10, 15, 18, and 25 MV show that the simulation results agree with the reference, except for the 6 MV. This difference is caused by beam hardening, that is to say beam enhancement due to scattering caused by local spots far from the radiation source (Efendi et al., 2017). The difference in the build-up value at 6 MeV is 2%. The simulation result value is still within the required tolerance (Yani et al., 2016). The simulation results of the build-up value and its comparison with the reference are shown in Table 2.

Table 2 Comparison of build-up values obtained from simulation and reference (Podgorsak, 2005)

No	Energy	Simulation	Reference	ΔL (%)
1	6 MV	1.47 cm	1.5 cm	98
2	8 MV	2.0 cm	2.0 cm	100
3	10 MV	2.5 cm	2.5 cm	100
4	15 MV	3.0 cm	3.0 cm	100
5	18 MV	3.5 cm	3.5 cm	100
6	25 MV	5.0 cm	5.0 cm	100

Secondary electron contaminants

Figure 3 shows the traces of secondary electrons resulting from the interaction of photons with components of the LINAC head operated at voltages of 6, 8, 10, 15, 18 and 25 MV. The secondary electron intensity resulting from the interaction of photons with the primary collimator, flattening filter and secondary collimator components is depicted by color intensity. The highest electron intensity is shown in red and the lowest in blue.

Based on Figure 3, the intensity of secondary electrons is highest around the primary collimator and flattening filter. The value of the electron flux intensity ranges from 10^9 to 10^{16} electrons/cm².s. The secondary electron intensity decreases further away from the flattening filter and

decreases further around the secondary collimator and water phantom.

Such high intensity of secondary electrons about the primary collimator is produced by the interaction between photons and W, Ni and Fe atoms through the mechanism of the photoelectric effect, Compton scattering and pair production.

Based on these three mechanisms, Compton scattering is dominant (Chegeni et al., 2021). With respect to the decrease in the intensity of secondary electrons in the secondary collimator, it is due to the relatively low number of photons impinging on the component.

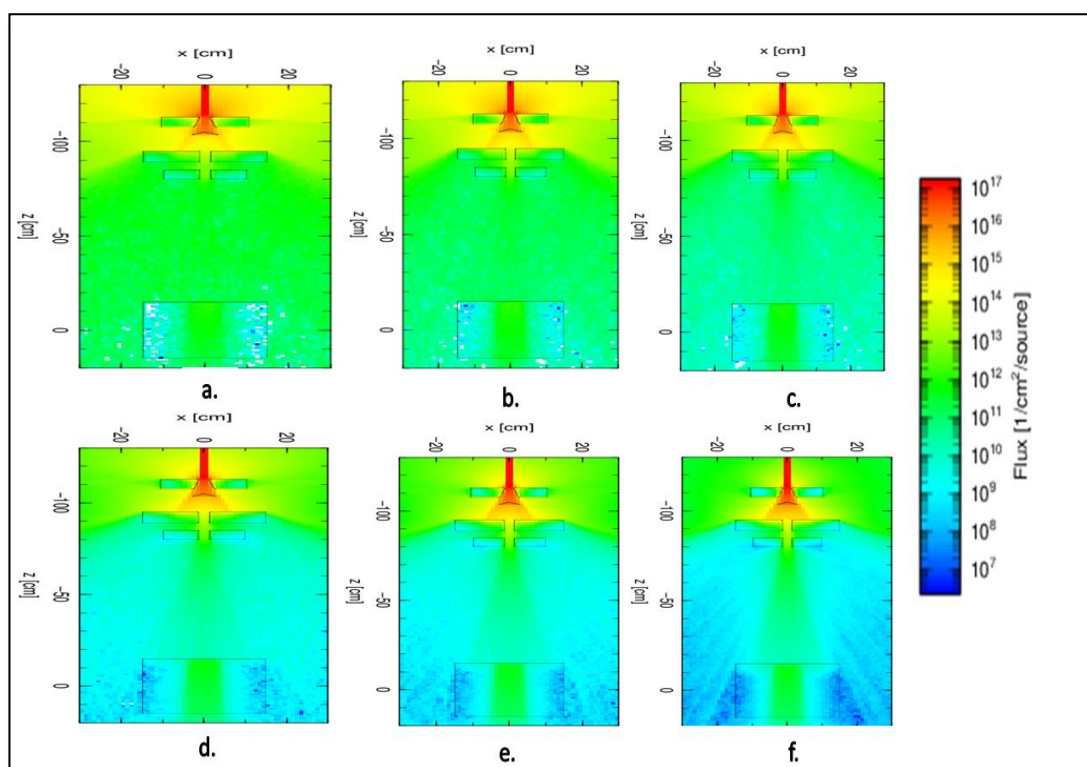


Figure 3. Particle traces of electron contaminant with X-ray voltage of (a) 6 MV, (b) 8 MV, (c) 10 MV, (d) 15 MV, (e) 18 MV, (f) 25 MV

The increase in the LINAC voltage has an impact on the electron flux intensity. The higher the voltage applied, the higher the intensity of the resulting neutron flux. An increase in voltage results in a greater primary electron velocity, such that it produces X-ray photons of higher intensity and energy when it strikes a target (Podgorsak, 2005). Subsequently, when the photon collides on the LINAC components, it also produces a higher intensity of secondary electrons. The simulation results for determining the intensity and energy distribution of secondary electrons on the water phantom surface using LINAC voltage variations are shown in Figure 4.

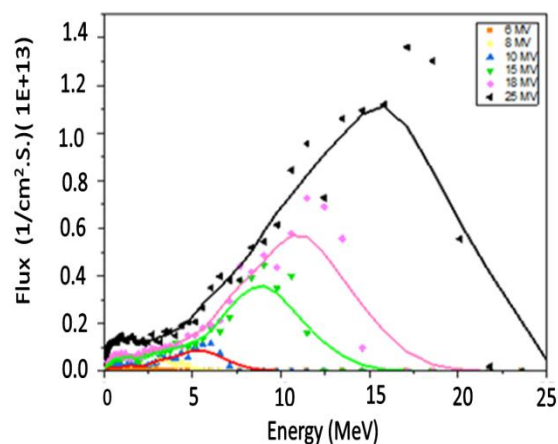


Figure 4. Spectrum of secondary electrons simulated at operating voltages of 6, 8, 10, 15, 18 and 25 MV.

Based on Figure 4 shows that the highest secondary electron flux is obtained at a voltage of 25 MV and the lowest at a voltage of 6 MV. In general, an increase in the LINAC operating voltage causes larger secondary electron fluxes. This increase is caused by the increase in the intensity of X-rays hitting the LINAC head components, such as the flattening filter and collimator (Chegeni et al., 2021; Mesbahi, 2009).

Dose of Secondary Electron Contaminant

Simulation result shows that the secondary electron flux strikes the phantom surface and penetrates further down the water phantom. The calculation results on the dose of secondary electron contamination at operating voltages of 6, 8, 10, 15, 18 and 25 MV are shown in Figure 5.

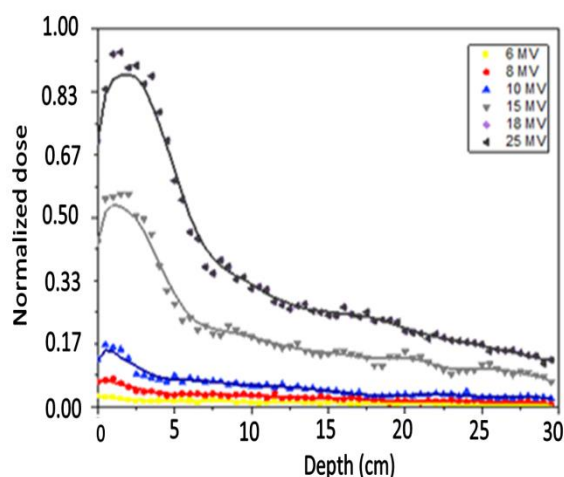


Figure 5. Dose of electron contaminants in the phantom at operating voltages of 6, 8, 10, 15, 18, and 25 MV.

Based on Figure 5 the dose on the surface of the phantom is low and increases up to certain depth, and decreases exponentially with increasing depth. At a voltage of 6, 8, and 10 MV the dose increases at a depth of, 0 cm, 0.5 cm, and 1 cm respectively. Furthermore, the maximum dose corresponding to the voltage of 15 MV occurs at a depth of 2 cm. Finally, at voltages of 18 and 25 MV, the maximum dose is reached at a depth of 1.5 cm. In general, the increase of LINAC machine

voltage has an impact on the increase in the dose (Chegeni et al., 2021).

Based on the simulation results, the PHITS program has been able to accurately determine that the penetration power of secondary electron contamination occurs between 0 - 2 cm. 2 cm is the average thickness of the human skin (Oltulu et al., 2018). The presence of these contaminants causes a skin sparking effect. It is an ionization process on the skin that can cause damage to the skin (De-Colle et al., 2021; Jo et al., 2017).

CONCLUSION

An investigation has been carried out on secondary electron contaminations resulting from LINAC machine operated at voltages of 6, 8, 10, 15, 18, and 25 MV based on a validated model. The simulation results show that X-ray photons interacting with the primary collimator, flattening filter, and secondary collimator components produce secondary electron contaminants. The higher the voltage applied, the higher the secondary electron flux produced. The secondary electron contamination dose calculated in water phantom shows that dose increases with the LINAC operating voltage.

Future research is to consider other aspects that affect the occurrence of contaminants, such as the radiation field and the type of material that makes up the LINAC head.

ACKNOWLEDGMENT

We would like to thank the Institute of Research and Community Service, Jenderal Soedirman University for providing research funds.

AUTHORS CONTRIBUTIONS

BL conducted the study on the components that constitute the LINAC head, constructed a model as the basis for the simulation, wrote the code for the PHITS program, and prepared the manuscript. AH contributed to conducting simulations. YS contributed to analyzing research data. YK

edited the English manuscript. All authors read and approved the final manuscript.

REFERENCES

- Abou-taleb, W. M., Hassan, M. H., Mallah, E. A. El, & Kotb, S. M. (2018). MCNP5 evaluation of photoneutron production from the Alexandria University 15 MV Elekta Precise medical LINAC. *Applied Radiation and Isotopes*, 135(1), 184–191. <https://doi.org/10.1016/j.apradiso.2018.01.036>
- AL-Naqqash, M. A., Essa, S. I., & Hasan, R. H. (2018). Measurement of percentage depth dose (PDD) for 6 MeV in water phantom and homogenous actual planning. *Iraqi Journal of Physics (IJP)*, 16(37), 1–6. <https://doi.org/10.30723/ijp.v16i37.70>
- Anam, C., Soejoko, D. S., Haryanto, F., Yani, S., & Dougherty, G. (2020). Electron contamination for 6 MV photon beams from an Elekta linac: Monte Carlo simulation. *Journal of Physics and Its Applications*, 2(2), 97–101. <https://doi.org/10.14710/jpa.v2i2.7771>
- Anderson, R., Lamey, M., Macpherson, M., Carlone, M., & Introduction, I. (2015). Simulation of a medical linear accelerator for teaching purposes. *Journal of Applied Clinical Medical Physics*, 16(3), 359–377.
- Butson, M. J. (1998). *Skin dose from radiotherapy x-rays*. Online University of Wollongong.
- Chegeni, N., Rahim, F., Tahmasbi, M., Farzanegan, Z., & Hosseini, S. K. (2021). Measurement and calculation of electron contamination for radiotherapy photon mode. *Jundishapur Journal of Health Sciences*, 13(1), 1–9. <https://doi.org/10.5812/jjhs.115067>
- De-Colle, C., Nachbar, M., Mönnich, D., Boeke, S., Gani, C., Weidner, N., Heinrich, V., Winter, J., Tsitsekidis, S., Dohm, O., Zips, D., & Thorwarth, D. (2021). Analysis of the electron-stream effect in patients treated with partial breast irradiation using the 1.5 T MR-linear accelerator. *Clinical and Translational Radiation Oncology*, 27(1), 103–108. <https://doi.org/10.1016/j.ctro.2020.12.005>
- Efendi, M. A., Funsian, A., Chittrakarn, T., & Bhongsuwan, T. (2017). Monte carlo simulation of 6 MV flattening filter free photon beam of truebeam STx LINAC at songklanagarind hospital. *Sains Malaysiana*, 46(9), 1407–1411. <https://doi.org/10.17576/jsm-2017-4609-08>
- Ezzati, A. O., Studenski, M. T., & Gohari, M. (2020). Spatial mesh-based surface source model for the electron contamination of an 18 MV photon beams. *Journal of Medical Physics*, 45(4), 221–225. https://doi.org/10.4103/jmp.JMP_29_20
- Furuta, T., & Sato, T. (2021). Medical application of particle and heavy ion transport code system PHITS. *Radiological Physics and Technology*, 14(3), 215–225. <https://doi.org/10.1007/s12194-021-00628-0>
- Gonzalez, L. A., Angelucci, M., Larciprete, R., & Cimino, R. (2017). The secondary electron yield of noble metal surfaces. *AIP Advances*, 7(11), 1–7. <https://doi.org/10.1063/1.5000118>
- Han, W., Zheng, M., Banerjee, A., Luo, Y. Z., Shen, L., & Khursheed, A. (2020). Quantitative material analysis using secondary electron energy spectromicroscopy. *Scientific Reports*, 10(1), 1–14. <https://doi.org/10.1038/s41598-020-78973-0>
- Hasan, R. H., Essa, S. I., & AL-Naqqash, M. A. (2019). Depth dose measurement in water phantom for two X-ray energies (6MeV and 10MeV) in comparison with actual planning. *Iraqi Journal of*

- Science*, 60(8), 1689–1693.
<https://doi.org/10.24996/ij.s.2019.60.8.5>
- Hashimoto, S., Iwamoto, O., Iwamoto, Y., Sato, T., & Niita, K. (2015). PHITS simulation of quasi-monoenergetic neutron sources from $^7\text{Li}(p,n)$ reactions. *Energy Procedia*, 71(1), 191–196.
<https://doi.org/10.1016/j.egypro.2014.1.1869>
- Jagtap, A. S., Palani Selvam, T., Patil, B. J., Chavan, S. T., Pethe, S. N., Kulkarni, G., Dahiwalé, S. S., Bhoraskar, V. N., & Dhole, S. D. (2016). Monte Carlo based investigations of electron contamination from telecobalt unit head in build up region and its impact on surface dose. *Applied Radiation and Isotopes*, 118(1), 175–181.
<https://doi.org/10.1016/j.apradiso.2016.09.012>
- Jo, I. Y., Kim, S. W., & Son, S. H. (2017). Dosimetric evaluation of the skin-sparing effects of 3-dimensional conformal radiotherapy and intensity-modulated radiotherapy for left breast cancer. *Oncotarget*, 8(2), 3059–3063.
<https://doi.org/10.18632/oncotarget.13830>
- Lye, J. E., Butler, D. J., & Webb, D. V. (2010). Enhanced epidermal dose caused by localized electron contamination from lead cutouts used in kilovoltage radiotherapy. *Medical Physics*, 37(8), 3935–3939.
<https://doi.org/10.1118/1.3458722>
- Mazzeo, E., Rubino, L., Buglione, M., Antognoni, P., Magrini, S. M., Bertoni, F., Parmiggiani, M., Barbieri, P., & Bertoni, F. (2014). The current management of mycosis fungoides and Sézary syndrome and the role of radiotherapy: Principles and indications. *Reports of Practical Oncology and Radiotherapy*, 19(2), 77–91.
<https://doi.org/10.1016/j.rpor.2013.07.009>
- Mesbahi, A. (2009). A Monte Carlo study on neutron and electron contamination of an unflattened 18-MV photon beam. *Applied Radiation and Isotopes*, 67(1), 55–60.
<https://doi.org/10.1016/j.apradiso.2008.07.013>
- Oltulu, P., Ince, B., Kökbudak, N., Findik, S., & Kiliç, F. (2018). Measurement of epidermis, dermis, and total skin thicknesses from six different body regions with a new ethical histometric technique. *Turkish Journal of Plastic Surgery*, 26(2), 56–61.
https://doi.org/10.4103/tjps.tjps_2_17
- Petti, P. L., Goodman, M. S., Gabriel, T. A., & Mohan, R. (1983). Investigation of buildup dose from electron contamination of clinical photon beams. *Medical Physics*, 10(1), 18–24.
<https://doi.org/10.1118/1.595287>
- Podgorsak, E. B. (2005). *Radiation oncology physics*. IAEA.
- Sadrollahi, A., Nuesken, F., Licht, N., Rübe, C., & Dzierma, Y. (2019). Monte-Carlo simulation of the Siemens Artiste linear accelerator flat 6 MV and flattening-filter-free 7 MV beam line. *PLoS ONE*, 14(1), 1–17.
<https://doi.org/10.1371/journal.pone.0210069>
- Sato, T., Niita, K., Matsuda, N., Hashimoto, S., Iwamoto, Y., Furuta, T., Noda, S., Ogawa, T., Iwase, H., Nakashima, H., Fukahori, T., Okumura, K., Kai, T., Chiba, S., & Sihver, L. (2015). Overview of particle and heavy ion transport code system PHITS. *Annals of Nuclear Energy*, 82(1), 110–115.
<https://doi.org/10.1016/j.anucene.2014.08.023>
- Seif, F., & Bayatiani, M. R. (2015). Evaluation of electron contamination in cancer treatment with megavoltage photon beams: Monte Carlo study. *J Biomed Phys Eng* 2015;, 5(1), 31–38.
- Smit, C., & du Plessis, F. C. P. (2015). Deriving electron contamination characteristics using Monte Carlo beam data. *Physica Medica*, 31(2015), 1–14.

- <https://doi.org/10.1016/j.ejmp.2015.07.126>
- Vichi, S., Dean, D., Ricci, S., Zagni, F., Berardi, P., & Mostacci, D. (2020). Activation study of a 15MeV LINAC via Monte Carlo simulations. *Radiation Physics and Chemistry*, 172(1), 1–6. <https://doi.org/10.1016/j.radphyschem.2020.108758>
- Yadav, G., Yadav, R. S., & Kumar, A. (2010). Effect of various physical parameters on surface and build-up dose for 15-MV X-rays. *Journal of Medical Physics*, 35(4), 202–206. <https://doi.org/10.4103/0971-6203.71761>
- Yani, S., Dirgayussa, I. G. E., Rhani, M. F., Soh, R. C. X., Haryanto, F., & Arif, I. (2016). Monte Carlo study on electron contamination and output factors of small field dosimetry in 6 MV photon beam. *Smart Science*, 4(2), 87–94. <https://doi.org/10.1080/23080477.2016.1195609>
- Yeh, B. M., FitzGerald, P. F., Edic, P. M., Lambert, J. W., Colborn, R. E., Marino, M. E., Evans, P. M., Roberts, J. C., Wang, Z. J., Wong, M. J., & Bonitatibus, P. J. (2017). Opportunities for new CT contrast agents to maximize the diagnostic potential of emerging spectral CT technologies. *Advanced Drug Delivery Reviews*, 113(23), 201–222. <https://doi.org/10.1016/j.addr.2016.09.001>