

Turnitin Paper ICETIR 2021 Characteristics of DC Current

by Suroso Suroso

Submission date: 05-Apr-2023 12:35PM (UTC+0700)

Submission ID: 2056364082

File name: Published_paper.pdf (621.23K)

Word count: 2448

Character count: 13480

Characteristics of DC current component injection in grid tied H-bridge CSI with transformer

2

Cite as: AIP Conference Proceedings **2482**, 070002 (2023); <https://doi.org/10.1063/5.0110672>

Published Online: 21 February 2023

Suroso and Hari Siswanto




View Online



Export Citation





APL Machine Learning

Machine Learning for Applied Physics
Applied Physics for Machine Learning

**First Articles
Now Online!**

2

AIP Conference Proceedings **2482**, 070002 (2023); <https://doi.org/10.1063/5.0110672>

2482, 070002

© 2023 Author(s).

Characteristics of DC Current Component Injection in Grid Tied H-Bridge CSI with Transformer

Suroso^{1, a)} and Hari Siswantoro^{1, b)}

4

Author Affiliations

¹ Electrical Engineering Department, Jenderal Soedirman University, Purwokerto, Indonesia.

Author Emails

^{a)} Corresponding author: suroso.te@unsoed.ac.id

^{b)} hari.siswantoro@unsoed.ac.id

Abstract. Grid tied operation is a working scheme of photovoltaic power system operating together with utility power grid to supply electric power to the load. In a grid connected photovoltaic system, the energy management can be applied to optimize energy utilization of photovoltaic system while keeping high reliability of power supply to the power load. Compared to voltage source inverter system, the grid connected photovoltaic system using current source inverter offers some merits such as higher quality of AC current, higher reliability of inverter, and high power factor operation. This paper discusses and analyzes characteristic of DC current component injection in a grid tied photovoltaic system using H-bridge current source inverter and transformer. Some data were presented and discussed to explore the characteristics of DC current injection of a grid connected H-bridge CSI.

INTRODUCTION

Recently, utilization of renewable energy sources has been increasing rapidly around the world. This trend is bolstered by environmental problems introduced by conventional fossil fuel based energy sources. One reason is that the fossil energy sources produce pollutant gases that cause serious environmental problems such as glass house effect, and climate change phenomenon in the world. Moreover, the pollutant gasses generated by conventional combustion engine are also harmful for human health [1], [2]. Renewable energy sources do not generate pollutant gasses as produced by fossil energy. They are more environmentally friendly. Hence it has attracted many countries to develop and apply renewable energy sources in higher portion and in a wider application.

In most of tropical countries, the solar energy is plentifully available. The solar energy can be in the form of solar thermal and solar light. Solar thermal can be alternative heat source to generate steam required by steam turbine to drive generator machine. The solar light energy can be converted into electrical energy by using photovoltaic modules. Since electrical loads are commonly AC load system, and the generated power by photovoltaic system is in the form of DC power, power inverter is needed to meet this condition [3], [4]. The photovoltaic modules are available from few watt power into hundreds watt power capacity per module. To increase capacity of solar modules, it can be easily attained by connecting some photovoltaic modules in series and parallel. Series connection is suitable when higher voltage is needed, while parallel connection is applied when high output current is required [5].

Basically, photovoltaic system can be operated in stand-alone or grid tied operations. In a stand-alone scheme, the photovoltaic system supply energy to the load. This scheme can be a solution when there is no utility power supply available. It is commonly interesting to be applied in a remote and isolated area where the power load can be DC or AC system. In addition, in a grid connected photovoltaic system, the photovoltaic works concurrently with utility power supply to give electric power to the load [9-11]. As a result, it can reduce the energy consumption and energy cost that should be paid to utility power company by consumers.

2

The 3rd International Conference on Engineering, Technology and Innovative Researches

AIP Conf. Proc. 2482, 070002-1–070002-7; <https://doi.org/10.1063/5.0110672>

Published by AIP Publishing. 978-0-7354-4298-6/\$30.00

070002-1

Practically, harmonics are appeared in the AC current generated by inverter. It can be caused by some factors such as improper work of controller, errors of modulation circuits, and also the presence of voltage drop in circuit components [12]. Low order of harmonics and DC current components can cause serious problems such as overheat of power load, components, and premature saturation of power transformer in the system [13-16]. This paper presents and discusses characteristics of generated DC current component by H-bridge current source inverter operated in grid connected operation. The characteristics was compared with the off-grid operation. The system was examined by computer simulations tests.

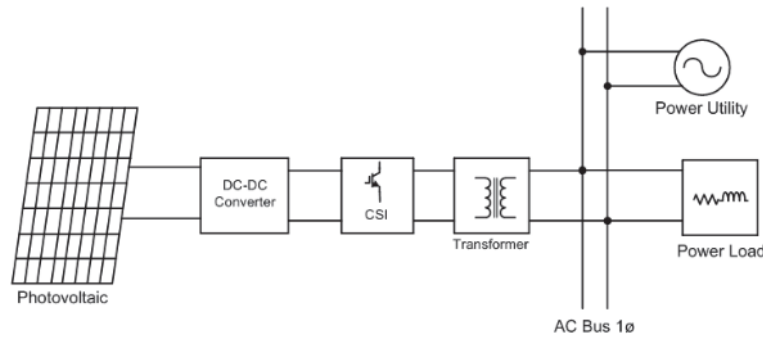


FIGURE 1. Grid connected photovoltaic system using inverter and power transformer

PROPOSED SYSTEM

Fig. 1 shows a configuration of grid connected photovoltaic system by using power inverter, dc-dc converter and power transformer. Technically, to connect photovoltaic system to power grid, a power inverter is required as interface and power conditioner. The power inverter will work to convert the DC power of photovoltaic system into AC power to meet the voltage level and frequency of AC power grid. These power inverters can be voltage source power inverter or current source one [17-19]. The voltage source inverters have been widely used and commercially available in the market. They are available in low power range for single phase configuration, and higher power in kilo-watts order for three phase inverter circuits. The current source inverter is relatively new inverter circuit. It has some advantages such as higher reliability from short circuit faults, better quality of AC current, and easy to be operated in high power factor operation. It can be new alternative of photovoltaic inverter [20].

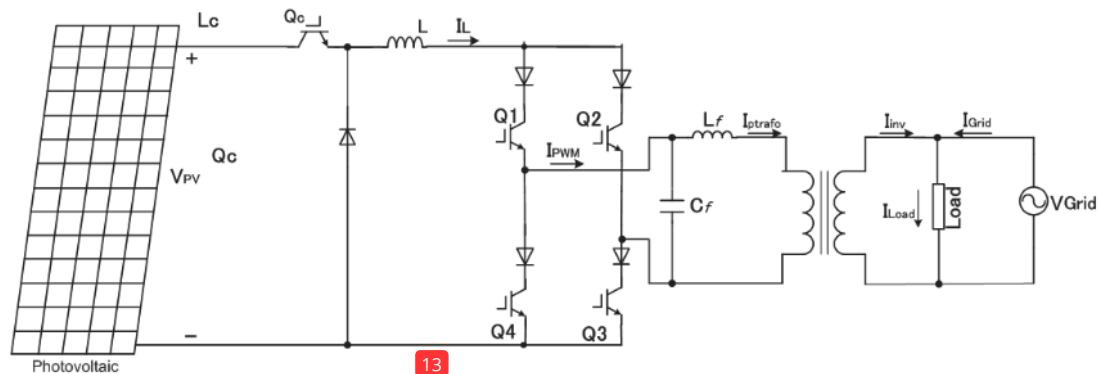


FIGURE 2. Proposed grid connected photovoltaic system

Fig. 2 presents configuration of grid connected photovoltaic system apply H-bridge current source inverter and power transformer. The current source inverter works converting DC current of photovoltaic system into AC current suitable with power grid frequency. The inductor L is used to obtain DC current source for inverter circuits from the

operation of power switch Q_c . Capacitor and inductor filters, i.e. C_f and L_f , are implemented to obtain a sinusoidal output current of inverter circuits.

Table 1 lists the circuit parameters of the system. The power inductor size is 2.2 mH, filter capacitor 100 μ F. The output voltage of photovoltaic system is 49.7 V. The inverter was operated in sinusoidal pulse width modulation mode to deliver closely sinusoidal AC output current. The switching frequency of inverter power switches was determined at 22 kHz. It is suitable for IGBTs power switches employed to construct inverter circuits. The IGBTs power switches were connected in series with high speed power diodes to achieve unidirectional current power switches. To meet the voltage level of power grid, a power transformer was applied with winding ratio between primary and secondary sides 1:6. The output terminal of transformer was connected to 220 V 50 Hz AC power grid system. The inverter and utility power grid supply a common power load, i.e. resistor 8 Ω , inductor 6 mH. To govern the output current of inverter, a PI current controller was implemented.

TABLE 1 Circuit parameters

| Parameters | Values |
|-------------------------|----------------------|
| DC inductor | 2.2 mH |
| Voltage of PV system | ± 49.7 V |
| Grid voltage | 220 V, 50 Hz |
| Switching frequency | 22 kHz |
| Modulation index | 0.9 |
| Capacitor filter | 100 μ F |
| Load | $R = 8$, $L = 6$ mH |
| Main frequency | 50 Hz |
| Power transformer ratio | 1:6 |

RESULTS AND ANALYSIS

The proposed photovoltaic and inverter system with parameters as described in Table 1 was tested by computer simulations. Some test results are explained as follow:

Off-Grid Operation Test

Output waveforms of the system during off-grid operation is depicted in Fig. 3. The output current of photovoltaic (I_{pv}), inverter current before filtering (I_{pwm}), and inverter current at primary side of transformer (I_{ptrafo}) can be observed in this figure. The measured RMS value of I_{ptrafo} was 16,623 A. Three-level PWM current and sinusoidal output currents were produced by inverter circuits. The THD value of I_{ptrafo} was 3.481 %.

A measured magnitude of DC current in the inverter output current (I_{DC}) was 0.063 A or 0.234 % of RMS inverter current. Fig. 4 presents a characteristic of DC current component in the inverter output current during off-grid operation for different modulation index value. From the obtained data, the largest percentage of I_{DC} was happened at modulation index 0.2. The largest value of DC current component compared to the RMS value of AC output current was 29.57%. While the minimum percentage of DC component was achieved at modulation index 1 with its value was 0.195%.

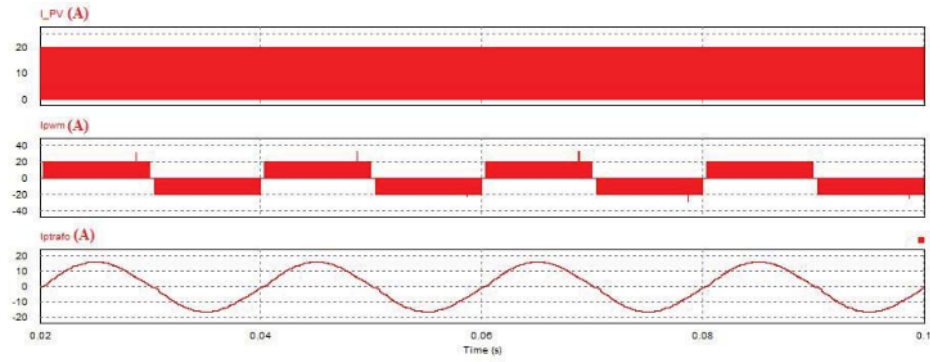


FIGURE 3. Photovoltaic current, three-level PWM current and primary side of transformer currents.

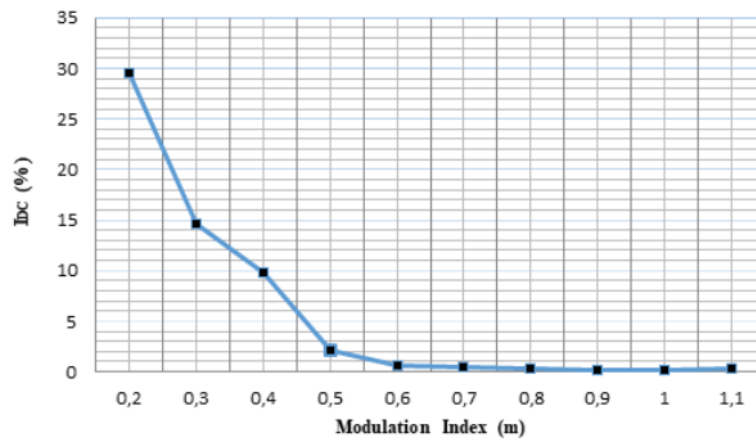


FIGURE 4. Characteristic of dc current component during off-grid operation.

On-Grid Operation Test

The photovoltaic system of Fig. 2 was connected to AC 220 V 50 Hz power grid. Fig. 5 present the measured waveforms of photovoltaic output current (I_{pv}), PWM current (I_{pwm}) and transformer primary side current (I_{ptrafo}). The measured THD value of transformer primary side current (I_{ptrafo}) was 9.034 %. It was worse than the result of off-grid operation test. High frequency ripple appear in the inverter output current. It is caused by the power grid that behave as disturbance to the inverter control system.

A DC current component characteristics of the inverter output current for different modulation indexes is depicted in Fig. 6. The maximum percentage of DC current was occurred at modulation index 0.2 with its value was 18.5%. While the minimum percentage of DC current component was obtained at modulation index 1, i.e. 0.072%. Comparison of percentage DC current component during off-grid and on-grid systems was shown in Fig. 7. The percentage of DC current component was lower during grid connected operation of inverter system.

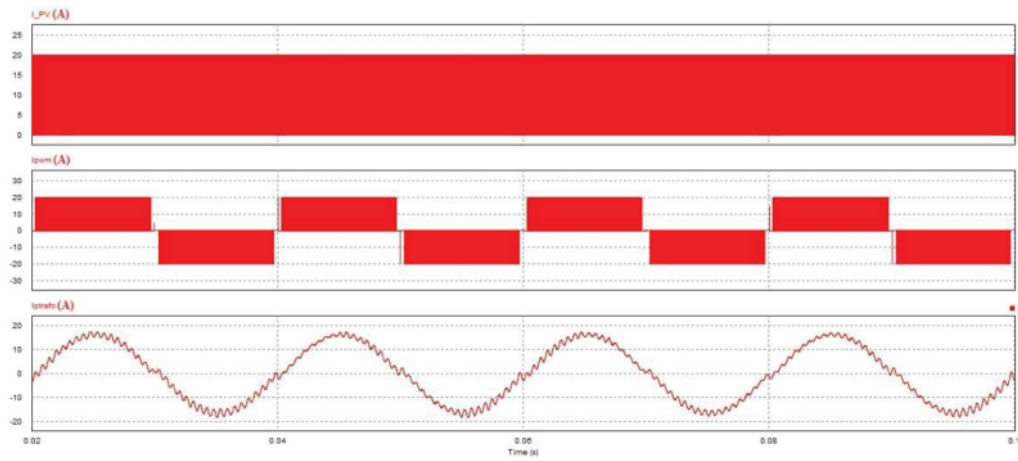


FIGURE 5. Current waveform during grid connected operation.

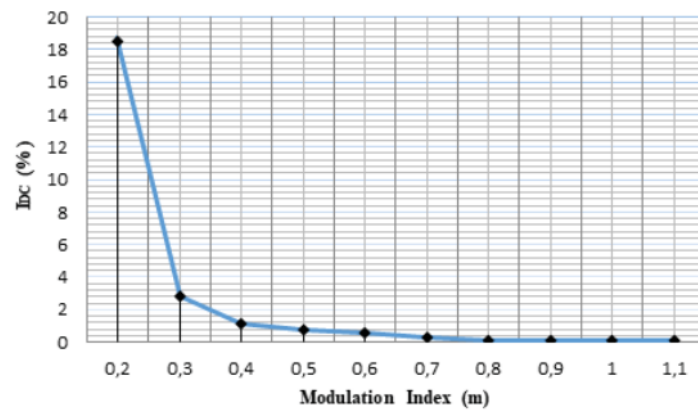


FIGURE 6. Characteristic of DC current component for different modulation index.

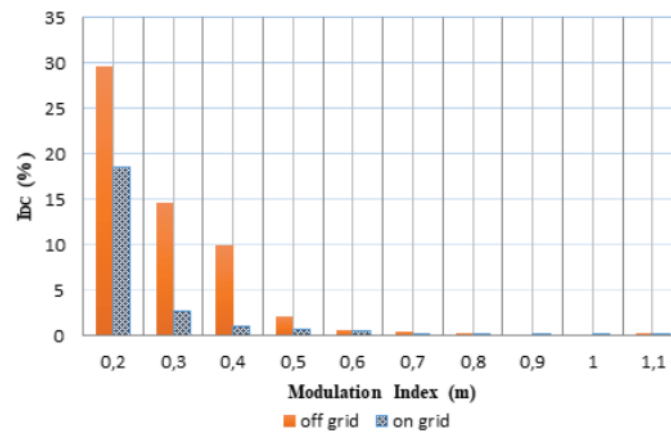


FIGURE 7. Comparison of DC current component during off-grid and on-grid operations.

CONCLUSIONS

¹ A grid tied photovoltaic system applying H-bridge CSI and transformer has been presented and discussed in this paper, focusing on characteristics of DC current component of the inverter output current. The data showed that the percentage of DC current component will decrease as modulation index getting higher with minimum value achieved at modulation index 1. Comparison between off-grid and on-grid operation¹⁶ showed that the percentage of DC current component was lower when the inverter operated as grid tied operation. The DC current component of inverter output current should be minimized to reduce its effects to system component performance.

³ACKNOWLEDGMENTS

This study was funded by research grant provided by Jenderal Soedirman University, Indonesia.

REFERENCES

1. F. Perera, "Pollution from fossil-fuel combustion is the leading environmental threat to global pediatric health and equity: solutions exist", *International Journal of Environmental Research and Public Health*, vol. 15, no.1, 2018.
2. J. Jurasz, F.A. Canales, A. Kiesd, M. Guezgouze, and A. Belucof, "A review on the complementarity of renewable energy sources: Concept, metrics, application and future research directions", *Solar Energy*, vol. 195, pp. 703-724, 2020.
3. Suroso, and H. Siswanto, "A performance comparison of transformer-less grid tied PV system using diode clamped and neutral point shorted inverters", *International Journal of Power Electronics and Drive Systems*, vol. 11, No. 2, pp. 702-710, June 2020.
4. J. M. Carrasco, L. G. Franquelo, J. T. Bialasiewicz, E. Galván, R. C. Portillo Guisado, Ma. Ángeles Martín Prats, J. Ignacio León, and N. Moreno-Alfonso, "Power-electronic systems for the grid integration of renewable energy sources: a survey", *IEEE Transactions on Industrial Electronics*, vol. 53, no. 4, pp. 1002-1016, 2006.
5. S. Wang, "Current Status of PV in China and Its Future Forecast", *CSEE Journal of Power and Energy Systems*, vol. 6, Issue: 1, pp. 72 – 82, 2020.
6. A. Gholami, M. Ameri, M. Zandi, R. G. Ghochani, S. Eslami, S. Pierfederici, "Photovoltaic Potential Assessment and Dust Impacts on Photovoltaic Systems in Iran: Review Paper", *IEEE Journal of Photovoltaics*, vol. 10, Issue: 3, pp. 824 – 837, 2020.
7. J. C. Blakesley, T. Huld, H. Mülleijans, A. Gracia-Amillo, G. Friesen, T.R. Betts, W. Hermann, "Accuracy, cost and sensitivity analysis of PV energy rating", *Solar Energy*, vol. 203, pp. 91–100, 2020.
8. F. Luo, G. Ranzi, C. Wan, Z. Xu, and Z. Y. Dong, "A Multi-Stage Home Energy Management System with Residential Photovoltaic Penetration", *IEEE Transactions on Industrial Informatics*, vol. 15, Issue. 1, pp. 116 – 126, 2019.
9. S. A. Azmi, G. P. Adam, and B. Williams, "New direct regular-sampled pulse-width modulation applicable for grid and islanding operation of current source inverters", *IET Power Electronics*, vol. 7, no. 1, pp. 220-236, 2014.
10. P. G. Barbosa, H. A. C. Braga, M. C. Barbosa, and E. C. Teixeira, "Boost current multilevel inverter and its application on single phase grid connected photovoltaic system", *IEEE Transactions on Power Electronics*, vol. 21, no. 4, pp. 1116-1124, 2006.
11. G. Qiu, J. Liao, B. Wu, and Z. Shi, "Suppressing DC Current Injection in Transformerless Grid-Connected Inverter Using A Customized Current Sensor", *IEEE Transactions on Power Electronics*, 2021.
12. Suroso, Winasis, T. Noguchi, "Overlap-time compensation technique for current-source power inverter", *IET Power Electronics*, vol.13, no.4, pp. 854-862, 2020.
13. B. Long, M. Zhang, Y. Liao, L. Huang, and K. To Chong, "An Overview of DC Component Generation, Detection and Suppression for Grid-Connected Converter Systems", *IEEE Access*, vol. 7, pp. 110426- 110438, 2019.
14. W. Zhang, M. Armstrong, and M. A. Elgendy. "DC Injection Suppression in Transformer-Less Grid-Connected Inverter using a DC-Link Current Sensing and Active Control Approach", *IEEE Transactions on Energy Conversion*, Vol. 34, Issue. 1, pp. 396 – 404, 2019.

15. A. Abdelhakim, P. Mattavelli, D. Yang, and F. Blaabjerg, "Coupled inductor-based DC current measurement technique for transformerless grid-tied inverters," *IEEE Transactions on Power Electronics*, vol. 33, no. 1, pp. 18–23, Jan. 2018.
16. A. Ahmed and R. Li, "Precise detection and elimination of grid injected DC from single phase inverters," *International Journal of Precision Engineering and Manufacturing*, vol. 13, no. 8, pp. 1341–1347, Aug. 2012.
17. S. B. Kjaer, J. K. Pederson, and F. Blaabjerg, "A review of single-phase grid-connected inverters for photovoltaic modules," *IEEE Transactions on Industrial Applications*, vol. 41, no. 5, pp. 1292–1306, Sep./Oct. 2005.
18. S. N. Vukosavic and L. S. Perić, "High-precision active suppression of DC bias in AC grids by grid-connected power converters," *IEEE Transactions on Industrial Electronics*, vol. 64, no. 1, pp. 857–865, Jan. 2017.
19. B. Wang, X. Guo, H. Gu, Q. Mei, and W. Wu, "Real-time DC injection measurement technique for transformerless PV systems," in *Proc. The 2nd International Symposium on Power Electronics for Distributed Generation Systems*, pp. 980–983, 2010.
20. Suroso, D. T. Nugroho, Amran, and T. Noguchi, "Parallel operation of current-source inverter for low-voltage high-current grid-connected photovoltaic system", *International Journal of Electrical and Computer Engineering*, vol. no.4, p.p. 2220-2229, 2019.

Turnitin Paper ICETIR 2021 Characteristics of DC Current

ORIGINALITY REPORT

20%

SIMILARITY INDEX

11%

INTERNET SOURCES

18%

PUBLICATIONS

3%

STUDENT PAPERS

PRIMARY SOURCES

- | | | |
|---|--|----|
| 1 | ijpeds.iaescore.com Internet Source | 6% |
| 2 | Submitted to Universitas Jenderal Soedirman Student Paper | 3% |
| 3 | Suroso. "Characteristics of overlap-time effect in a carrier based SPWM three-phase common-emitter CSI", AIP Publishing, 2023 Publication | 2% |
| 4 | Gentur Waluyo, Indra Permanajati, FX Anjar Tri Laksono. "Chemical index alteration of weathering on pyroclastic breccia in the Pawinihan Mountain Avalanche, Banjarnegara, Central Java, Indonesia", AIP Publishing, 2023 Publication | 1% |
| 5 | A. Barrado. "Digital control based on the shifting phase for grid connected photovoltaic inverter", 2008 Twenty-Third Annual IEEE Applied Power Electronics Conference and Exposition, 02/2008 Publication | 1% |

6

Weichi Zhang, Matthew Armstrong, Mohammed A. Elgendy. "DC Injection Suppression in Transformer-Less Grid-Connected Inverter using a DC-Link Current Sensing and Active Control Approach", IEEE Transactions on Energy Conversion, 2019

Publication

1 %

7

Eunsoo Jung, Seung-Ki Sul. "Implementation of Grid-connected Single-phase Inverter Based on FPGA", 2009 Twenty-Fourth Annual IEEE Applied Power Electronics Conference and Exposition, 2009

Publication

1 %

8

Suroso Suroso, Hari Siswantoro. "A performance comparison of transformer-less grid tied PV system using diode clamped and neutral point shorted inverters", International Journal of Power Electronics and Drive Systems (IJPEDS), 2020

Publication

1 %

9

Suroso, Winasis, Priswanto, Ignatius Daniel Purnama. "Design of 1 kW Buck-Boost Chopper with PI Control for Photovoltaic Power Conversion", IOP Conference Series: Materials Science and Engineering, 2020

Publication

1 %

10

Sesha Swetha, T., and R.V.D. Rama Rao. "Transient simulation of minimum current

1 %

ripple-hybrid multi-level current source inverter (CSI)", Third International Conference on Computational Intelligence and Information Technology (CIIT 2013), 2013.

Publication

11

Suroso. "Novel single phase grid connected current-source PWM inverter with harmonic suppression", 2008 IEEE 2nd International Power and Energy Conference, 12/2008

Publication

1 %

12

hdl.handle.net

Internet Source

1 %

13

www.ijrer.com

Internet Source

1 %

14

acikerisim.karabuk.edu.tr:8080

Internet Source

<1 %

15

Ashraf Ahmed, Ran Li. "Precise detection and elimination of grid injected DC from single phase inverters", International Journal of Precision Engineering and Manufacturing, 2012

Publication

<1 %

16

M. Elgendy, M. Armstrong, W. Zhang. "DC component detection in grid connected inverter systems, using a mid-ground low pass filter approach", 8th IET International

<1 %

Conference on Power Electronics, Machines and Drives (PEMD 2016), 2016

Publication

17

Nasser Tleis. "International standards for short-circuit analysis in ac power systems", Elsevier BV, 2019

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On